

PI84 with socket Push-in GZP80

interface relays with Push-in terminals


RM84 + GZP80



RM84 (AC) 1 + GZP80



RM84 (DC) 1 + GZP80



- Interface relay PI84 with socket GZP80, designed for continuous operation*, consists of: electromagnetic relay RM84 (standard white or option transparent: AC orange, DC blue 1), grey plug-in socket GZP80 (flammability class V-0), signalling / protecting module type M..., retainer / retractor clip GZP80-0400 (plastic)
- 35 mm rail mount acc. to EN 60715 or on panel mounting with one M3 screw
- May be linked with interconnection strips type ZGZP...
- Recognitions, certifications, directives**: recognitions RM84, RoHS,

Contact data


Number and type of contacts	2 CO	
Contact material	AgNi , AgNi/Au hard gold plating, AgSnO ₂	
Rated / max. switching voltage	AC 250 V / 300 V	
Min. switching voltage	5 V AgNi, 5 V AgNi/Au hard gold plating, 10 V AgSnO ₂	
Rated load (capacity)	AC1 8 A / 250 V AC AC15 3 A / 120 V 1,5 A / 240 V (B300) DC1 8 A / 24 V DC (see Fig. 3) DC13 0,22 A / 120 V 0,1 A / 250 V (R300)	
Motor load	acc. to UL 508	1/3 HP 240 V AC, 3,6 FLA, single-phase motor ②
	AC3 acc. to IEC 60947-4-1	0,37 kW 240 V AC, single-phase motor
Min. switching current	5 mA AgNi, 2 mA AgNi/Au hard gold plating, 10 mA AgSnO ₂	
Max. make current	15 A	
Rated current	8 A	
Max. breaking capacity	AC1 2 000 VA	
Min. breaking capacity	0,3 W AgNi, 0,05 W AgNi/Au hard gold plating, 1 W AgSnO ₂	
Contact resistance	$\leq 100 \text{ m}\Omega$	
Max. operating frequency	• at rated load AC1 600 cycles/hour	
	• no load 72 000 cycles/hour	
Coil data		
Rated voltage	50/60 Hz AC	12, 24 , 48, 115, 120, 230 V
	DC	12, 24 , 48, 110 V
Must release voltage	AC: $\geq 0,15 U_n$ DC: $\geq 0,1 U_n$	
Operating range of supply voltage	see Tables 1, 2 and Fig. 4, 5	
Rated power consumption	AC	0,75 VA
	DC	0,4 ... 0,48 W
Insulation according to EN 60664-1		
Insulation rated voltage	250 V AC	
Rated surge voltage	4 000 V 1,2 / 50 μs	
Oversupply category	III	
Insulation pollution degree	3	
Dielectric strength	• between coil and contacts 5 000 V AC	type of insulation: reinforced
	• contact clearance 1 000 V AC	type of clearance: micro-disconnection
	• pole - pole 2 500 V AC	type of insulation: basic
Contact - coil distance	• clearance $\geq 10 \text{ mm}$	
	• creepage $\geq 10 \text{ mm}$	
General data		
Operating / release time (typical values)	7 ms / 3 ms	
Electrical life	• resistive AC1 $> 10^5$	8 A, 250 V AC
	• cos φ see Fig. 2	
	• DC L/R=40 ms $> 10^5$	0,15 A, 220 V DC
Mechanical life (cycles)	$> 3 \times 10^7$	
Dimensions (L x W x H)	97 x 15,9 x 75,8 mm	
Weight	65 g	
Ambient temperature	• storage -40...+85 °C	
(non-condensation and/or icing)	• operating coil AC: -40...+70 °C	coil DC: -40...+85 °C -20...+70 °C ①
Cover protection category	IP 20	EN 60529
Environmental protection	RM84: RTII	GZP80: RT0 EN 61810-1
Shock resistance	20 g	
Vibration resistance	(NO/NC) 10 g / 5 g	10...150 Hz

The data in bold type relate to the standard versions of the relays. *The relays are designed for continuous operation while maintaining the parameters declared in the data sheet. **The cULus certification covers the certifications of the interface kit components, i.e. socket and relay. ① Special versions - relays in transparent cover, operating temperature -20...+70 °C. See "Ordering codes". ② For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.


PI84 with socket Push-in GZP80

interface relays with Push-in terminals

Dimensions

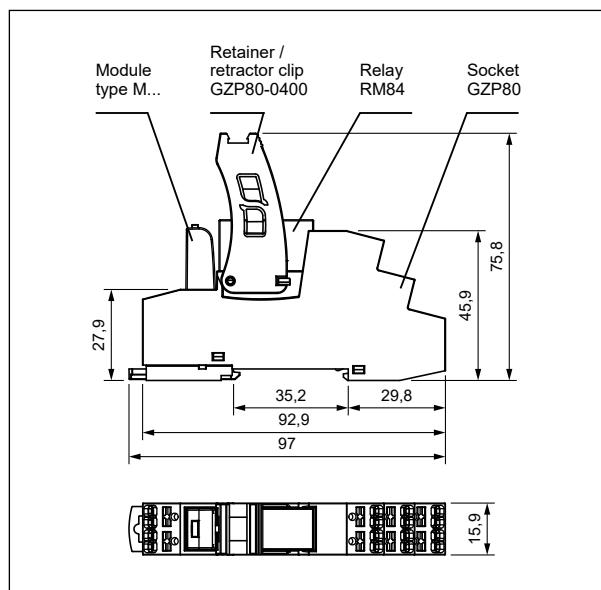


Connection diagrams (Push-in terminals side view)

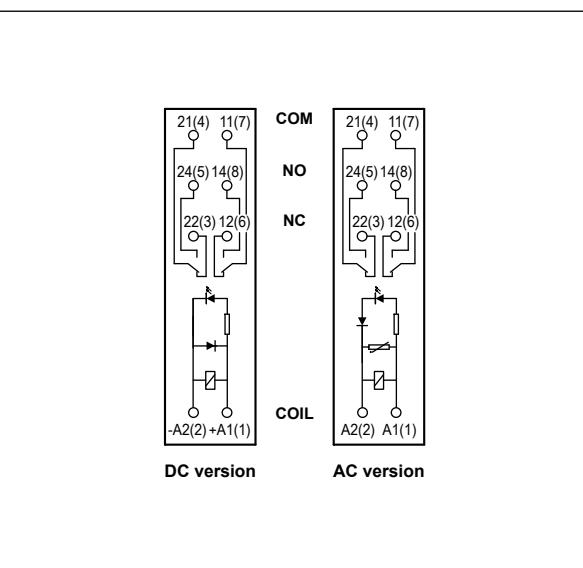


Wire connection

The drawings present inserting wire into the Push-in terminal and removing wire using the button releasing a clamp (assembly without tools).

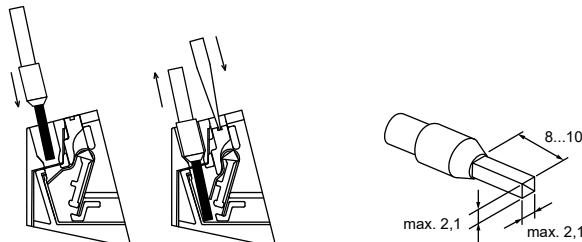

Connection of GZP80 socket

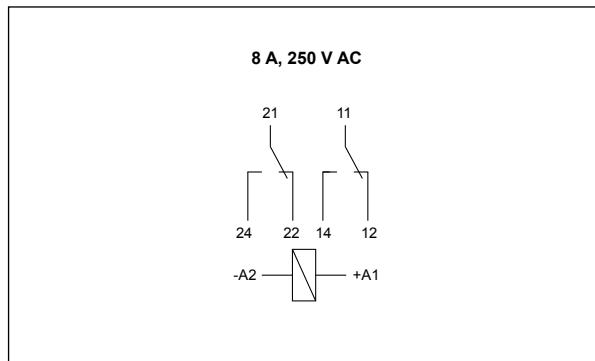

Connecting accessories

- see page 6



ZGZP80-8 GY grey
ZGZP80-8 BK black
ZGZP80-8 RD red
ZGZP80-8 BE blue



ZGZP80-2 GY grey
ZGZP80-2 BK black
ZGZP80-2 RD red
ZGZP80-2 BE blue



ZGZP80-2 GY grey
ZGZP80-2 BK black
ZGZP80-2 RD red
ZGZP80-2 BE blue

Strips 8-poles ZGZP80-8: unlimited possibilities of connection configurations

(bridging of: A1, A2, A1 & A2 together), fast, safe and easy bridging of signals on the coil.

Strips 2-poles ZGZP80-2: free bridging of common input signals

and terminals on the contact side, creating parallel connections of outputs in redundancy systems.


Jumpers 2-poles ZGZP-2: parallel connections of neighbouring poles in one socket GZP80 or GZP4 without use additional wiring, increasing the load capacity from 12 A to 16 A (PI85, PI85P).

PI84 with socket Push-in GZP80

interface relays with Push-in terminals


Electrical life at AC resistive load.
Switching frequency: 600 cycles/hour

Fig. 1

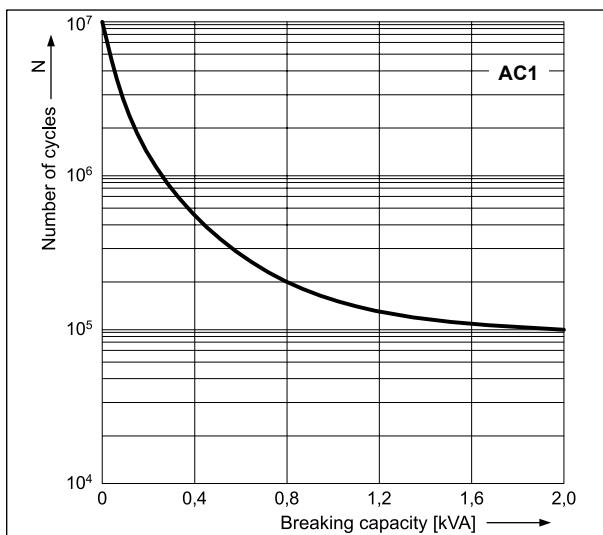


Electrical life reduction factor at AC inductive load


Fig. 2

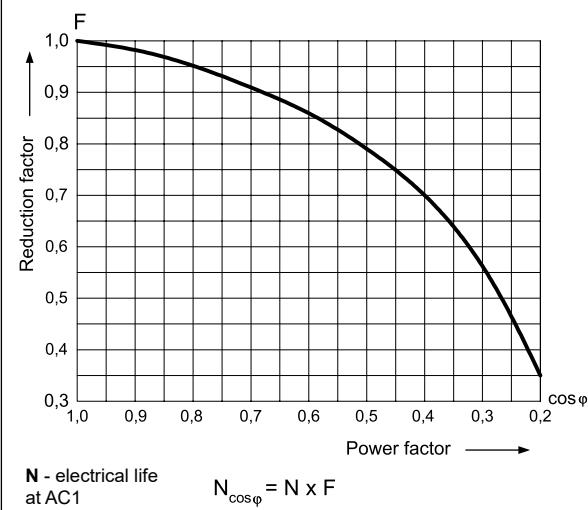


Max. DC resistive load breaking capacity Fig. 3

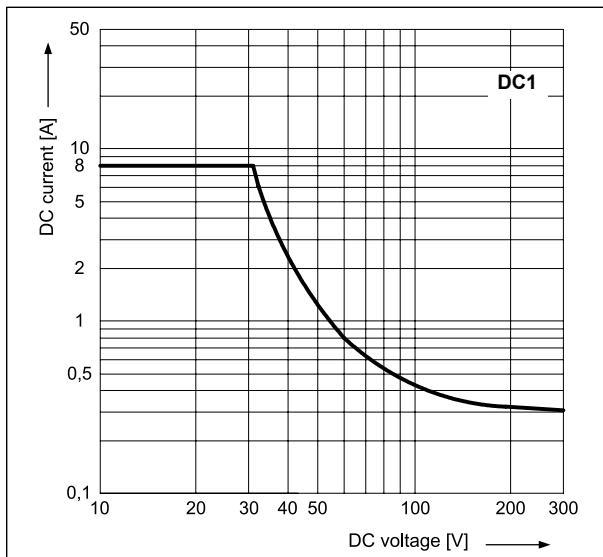

Coil operating range - DC Fig. 4

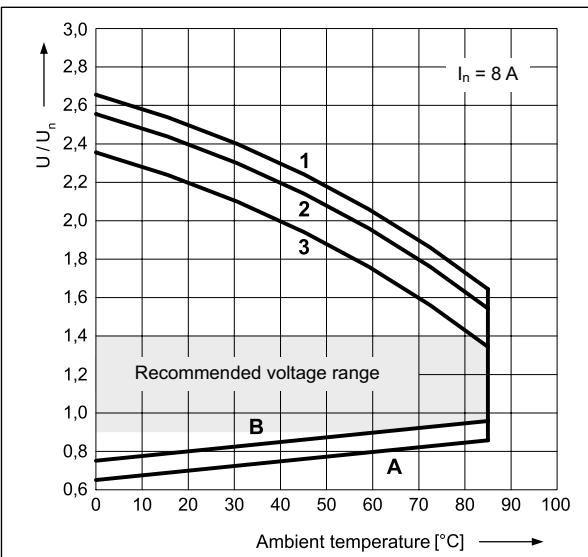

Coil operating range - AC 50 Hz Fig. 5

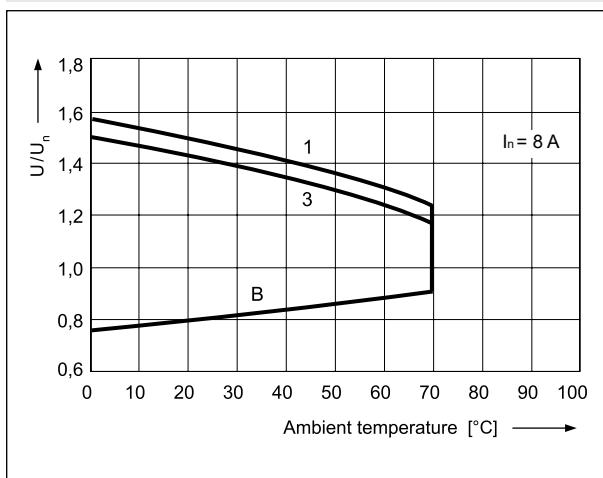

Description of Fig. 4 and 5

Using voltage other than the rated coil voltage may reduce the electrical life of the relay. Figure 4 shows the permissible voltage range for the relay coil, higher coil supply voltages may damage the coil insulation.

A - relations between make voltage and ambient temperature at no load on contacts. Coil temperature and ambient temperature are equal before coil energizing. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).

B - relations between make voltage and ambient temperature after initial coil heating up with $1.1 U_n$, at continues load of I_n on contacts. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).

1, 2, 3 - values on Y axis represent allowed overvoltage on coil at certain ambient temperature and contact load:

1 - no load

2 - 50% of rated load in AC1 category

3 - rated load in AC1 category

PI84 with socket Push-in GZP80



interface relays with Push-in terminals

Mounting

Relays **PI84** with socket **GZP80** are designed for direct mounting on 35 mm rail mount acc. to EN 60715 or on panel mounting with one M3 screw. **Connections:** max. cross section of the cables: 2 x 1,5 mm² (solid wire without ferrule or stranded wire with non-insulated ferrule), 2 x 1 mm² (solid or stranded wire with insulated ferrule), stripping length: 8...10 mm.

Plug-in sockets **GZP80** (flammability class V-0) may be linked with interconnection strips type **ZGZP...** Strip **ZGZP80-8** bridges common input signals, maximum permissible current is 10 A / 250 V AC, possibility of connection of 8 sockets. Strip **ZGZP80-2** bridges common input or output signals, possibility of connection of 2+n sockets. Jumper **ZGZP-2** bridges the neighboring poles of single socket **GZP80**. Colours of strips: **ZGZP...GY** grey, **ZGZP...BK** black, **ZGZP...RD** red, **ZGZP...BE** blue (see page 6).

Description plates **MP15**, snap into tall marker groove, compatible with the standard for DIN rail terminal blocks, should be ordered separately.

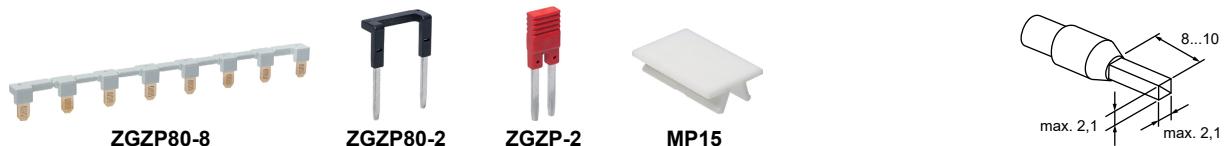

Terminals directed to wiring ducts: esthetic cabling management, easier content reading from markers on wires.



Holes for test probes: ergonomic, stable position of the probe in the socket, freedom to perform measurements and control.



Space for label: for self-adhesive paper, foil or polyester tapes (max. width 9 mm).

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC ③	
				min. (at 20 °C)	max. (at 20 °C)
012DC	12	360	± 10%	8,4	30,6
024DC	24	1 440	± 10%	16,8	61,2
048DC	48	5 700	± 10%	33,6	122,4
110DC	110	25 200	± 10%	77,0	280,0

The data in bold type relate to the standard versions of the relays. ③ The coil parameters are given for 20 °C and a relay with no load on the contacts. See details in Figure 5: permissible operating voltage range of the coil - DC voltage.

Coil data - AC 50/60 Hz voltage version

Table 2


Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC 50 Hz	
				min. (at 20 °C)	max. (at 20 °C)
012AC	12	100	± 10%	9,6	13,2
024AC	24	400	± 10%	19,2	28,8
048AC	48	1 550	± 10%	38,4	57,6
115AC	115	9 600	± 10%	92,0	138,0
120AC	120	10 200	± 10%	96,0	144,0
230AC	230	38 500	± 10%	184,0	276,0

The data in bold type relate to the standard versions of the relays.

PI84 with socket Push-in GZP80

interface relays with Push-in terminals

Ordering codes

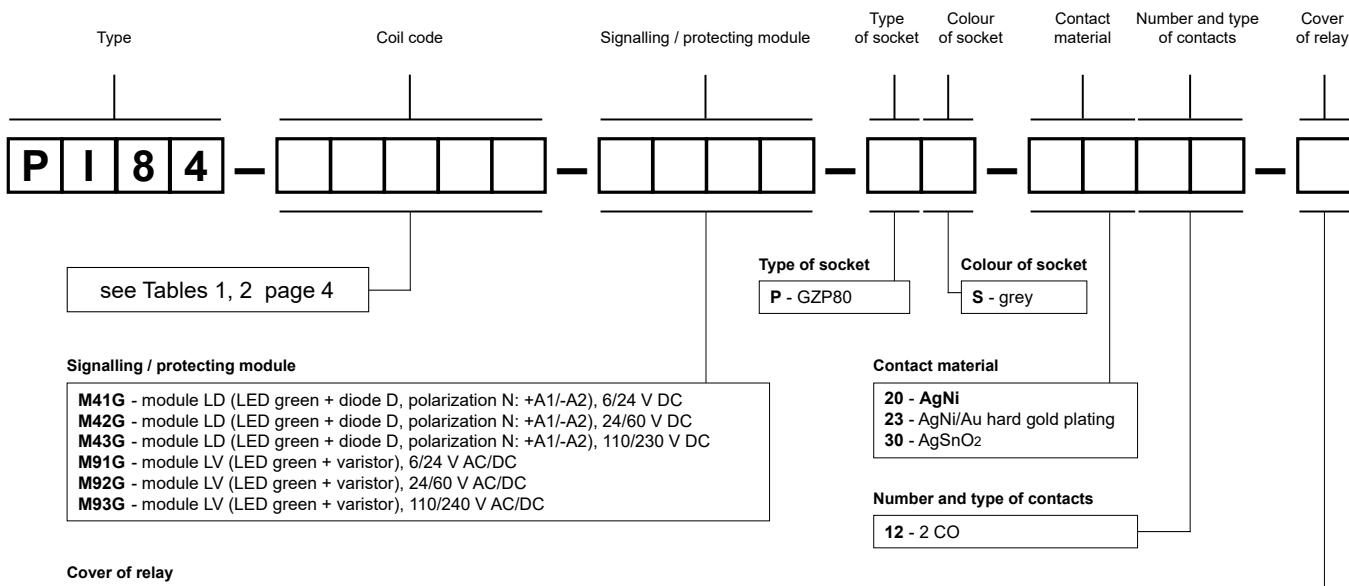

① 01: special version - relay in transparent cover, operating temperature -20...+70 °C

Examples of ordering codes:

PI84-230AC-M93G-PS-2012

interface relay **PI84** consists of: relay **RM84** (white, two changeover contacts, contact material AgNi, coil voltage 230 V AC 50/60 Hz), socket **GZP80** (grey, Push-in terminals), signalling / protecting module **M93G** (version LV), retainer / retractor clip **GZP80-0400** (red, plastic)

PI84-024AC-M91G-PS-2312-01

interface relay **PI84** consists of: relay **RM84** (orange, two changeover contacts, contact material AgNi/Au hard gold plating, coil voltage 24 V AC 50/60 Hz), socket **GZP80** (grey, Push-in terminals), signalling / protecting module **M91G** (version LV), retainer / retractor clip **GZP80-0400** (red, plastic)

PI84-024DC-M41G-PS-3012-01

interface relay **PI84** consists of: relay **RM84** (blue, two changeover contacts, contact material AgSnO₂, coil voltage 24 V DC), socket **GZP80** (grey, Push-in terminals), signalling / protecting module **M41G** (version LD), retainer / retractor clip **GZP80-0400** (red, plastic)

PI84-230AC-M93G-PS-2012
(standard white)



PI84-024AC-M91G-PS-2312-01
(option transparent: AC orange)




PI84-024DC-M41G-PS-2012-01
(option transparent: DC blue)



PRECAUTIONS:

1. Ensure that the parameters of the product described in its specification provide a safety margin for the appropriate operation of the device or system and never use the product in circumstances which exceed the parameters of the product.
2. Never touch any live parts of the device.
3. Ensure that the product has been connected correctly. An incorrect connection may cause malfunction, excessive heating or risk of fire.
4. In case of any risk of any serious material loss or death or injuries of humans or animals, the devices or systems shall be designed so to equip them with double safety system to guarantee their reliable operation.

Interconnection strips ZGZP... for sockets GZP80

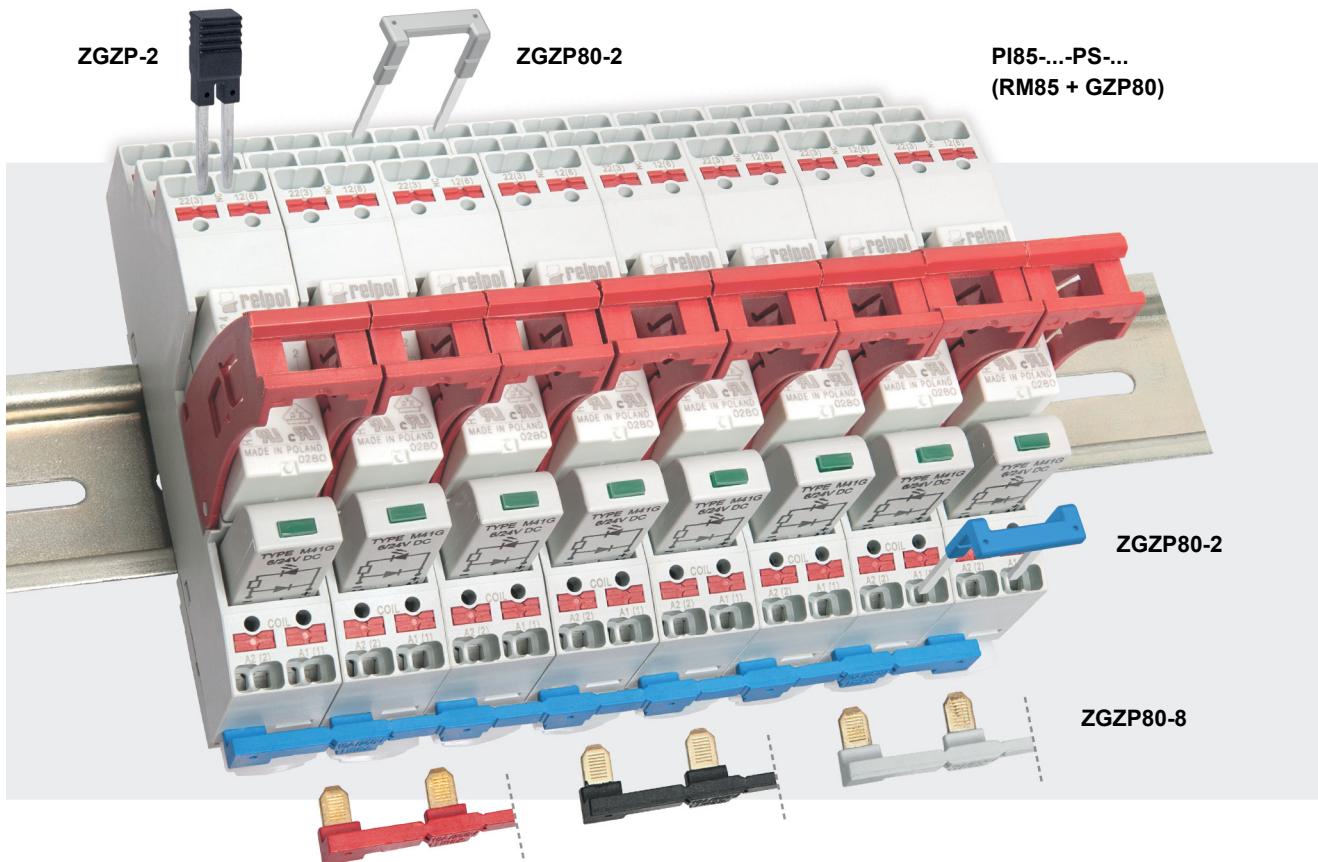

■ ZGZP... for:

Plug-in sockets	Relays for plug-in sockets	Interface relays ¹
GZP80	RM84, RM85, RM85 inrush, RM85 105 °C sensitive, RM87L ² , RM87P ² , RMP84, RMP85	PI84-...-PS-... (RM84 + GZP80) PI85-...-PS-... (RM85 + GZP80) PI84P-...-PS-... (RMP84 + GZP80) PI85P-...-PS-... (RMP85 + GZP80)

¹ Interface relay PI84 (PI85, PI84P, PI85P) is offered as a set: electromagnetic relay RM84 (RM85, RMP84, RMP85) + plug-in socket GZP80 + signalling / protecting module type M... + retainer / retractor clip GZP80-0400.

² Also versions RM87. sensitive

■ Interconnection strips ZGZP...

- designed for the co-operation with plug-in sockets of miniature relays and with interface relays PI84, PI85, PI84P, PI85P, which are equipped with Push-in terminals; sockets and relays are mounted on 35 mm rail mount acc. to EN 60715,
- strip **ZGZP80-8** bridges common input signals (coil terminals A1 or A2), maximum permissible current is 10 A / 250 V AC, possibility of connection of 8 sockets or relays,



- strip **ZGZP80-2** bridges common input signals (coil terminals A1 or A2) or output signals, possibility of connection of 2+n sockets or relays,



- jumper **ZGZP-2** bridges the neighboring poles of single socket **GZP80** (usage of jumpers ZGZP-2 in interface relays Push-in PI85, PI85P increases load capacity of socket from 12 A to 16 A).

