

# R4N

## miniature industrial relays

R4N (AC)



R4N (DC)



7 A / 230 V AC

- General purpose relays, designed for continuous operation\*
- For plug-in sockets: on 35 mm rail mount acc. to EN 60715; on panel mounting; with terminals for soldering
- PCB version available • AC and DC coils, insulation class F: 155 °C
- WT (mechanical indicator + lockable front test button) - standard equipment of relays. Relays may be provided with the test buttons (no latching) and plugs - page 8
- **Have obtained LR Type Approval Certificate (Lloyd's Register)**
- Recognitions, certifications, directives: RoHS,

### Contact data


Number and type of contacts		4 CO	
Contact material		<b>AgNi</b> , AgNi/Au flash gold plating, AgNi/Au hard gold plating	
Rated / max. switching voltage		250 V / 250 V	
Min. switching voltage		10 V AgNi, 10 V AgNi/Au flash gold plating 5 V AgNi/Au hard gold plating	
Rated load (capacity)	AC1	7 A / 230 V AC (VDE)	6 A / 250 V AC
	AC15	1,5 A / 120 V	0,75 A / 240 V (C300)
	DC1	6 A / 24 V DC (see Fig. 3)	
	DC13	0,22 A / 120 V	0,1 A / 250 V (R300)
Motor load	acc. to UL 508	1/3 HP	240 V AC, 3,6 FLA, single-phase motor
	AC3 acc. to IEC 60947-4-1	0,125 kW	240 V AC, single-phase motor
Min. switching current		5 mA	
Max. make current		12 A	
Rated current		7 A	
Max. breaking capacity	AC1	1 500 VA	
Min. breaking capacity		0,3 W AgNi, 0,3 W AgNi/Au flash gold plating 0,1 W AgNi/Au hard gold plating	
Contact resistance		≤ 100 mΩ	
Max. operating frequency	• at rated load AC1 • no load	1 200 cycles/hour 18 000 cycles/hour	
<b>Coil data</b>			
Rated voltage	50/60 Hz AC	6, 12, <b>24</b> , 42, 48, 60, 80, 110, 115, 120, 127, 220, <b>230</b> , 240 V	
	DC	5, 6, <b>12</b> , <b>24</b> , 48, 60, 80, 110, 125, <b>220</b> V	
Must release voltage		AC: ≥ 0,2 U <sub>n</sub>	DC: ≥ 0,1 U <sub>n</sub>
Operating range of supply voltage		see Tables 1, 2 and Fig. 4, 5	
Rated power consumption	AC	50 Hz: 1,6 VA	60 Hz: 1,3 VA
	DC	0,9 W	
<b>Insulation according to EN 60664-1</b>			
Insulation rated voltage		250 V AC	
Rated surge voltage		2 500 V 1,2 / 50 µs	
Overvoltage category		II	
Insulation pollution degree		2	
Dielectric strength	• between coil and contacts • contact clearance • pole - pole	2 500 V AC 1 500 V AC 2 000 V AC	type of insulation: basic type of clearance: micro-disconnection type of insulation: basic
Contact - coil distance	• clearance • creepage	≥ 1,6 mm ≥ 3,2 mm	
<b>General data</b>			
Operating / release time (typical values)		AC: 10 ms / 8 ms	DC: 13 ms / 5 ms
Electrical life	• resistive AC1 • cosφ	> 5 x 10 <sup>4</sup> 7 A, 230 V AC (VDE) > 10 <sup>5</sup> 6 A, 250 V AC see Fig. 2	
Mechanical life (cycles)		> 2 x 10 <sup>7</sup>	
Dimensions (L x W x H)		27,4 x 21 x 35,5 mm	
Weight		35 g	
Ambient temperature (non-condensation and/or icing)	• storage • operating	-40...+85 °C coil AC: -40...+55 °C	coil DC: -40...+70 °C
Cover protection category		IP 40	EN 60529
Environmental protection		RTI	EN 61810-1
Shock resistance	(NO/NC)	10 g / 5 g	
Vibration resistance		5 g 10...150 Hz	

The data in bold type relate to the standard versions of the relays. \*The relays are designed for continuous operation while maintaining the parameters declared in the data sheet. For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.

**Design**



**Improvement of the functionality of the mechanical indicator (W):** it is mounted on an insulation base of the unit of the movable contacts; the changes provide the appropriate position in the window in the upper side of the housing irrespectively of the number of operations performed by the relay.

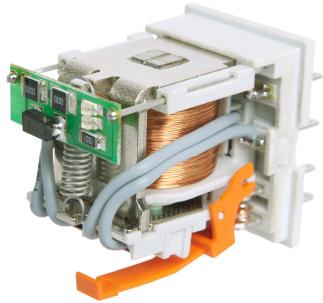


**Application of electronics made in the SMD technology:** additional equipment L (LED diode) and D (diode) are located on the printed circuit board; the change of the position of the LED diode and optimization of the quality and intensity of its light provide certainty that the relay is in operation status when the LED is on.




**Improvement of the efficiency of the electromagnet:** an innovational technology of connecting elements has been introduced, which guarantees more reliable operation of the relay.

**Strengthening of the insulation in the area of the contact plate:** polyamide PA66 has been applied; it has very good mechanical and electrical parameters and best thermal properties.


**Dimensions - plug-in version (WT), with lockable front test button type T**

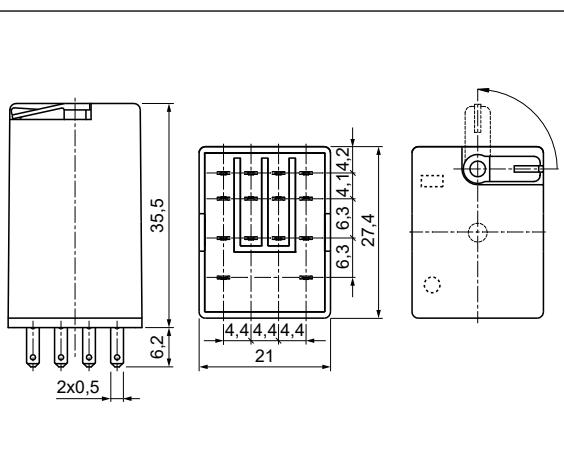

**Dimensions - plug-in version, with test button (no latching) or with plug (no manual operation)**

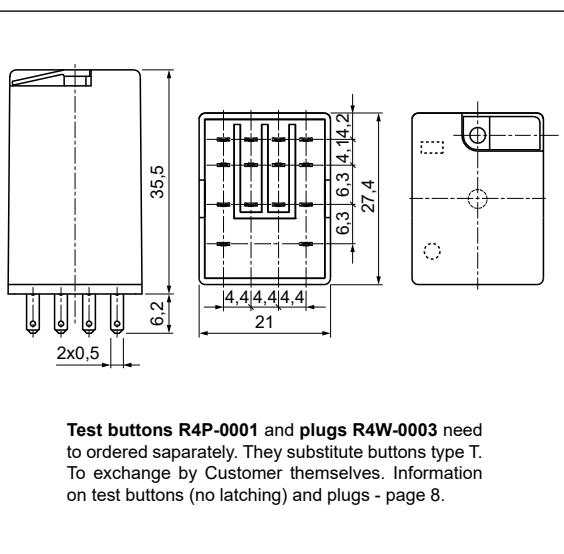

**Dimensions - PCB version (WT), with lockable front test button type T**

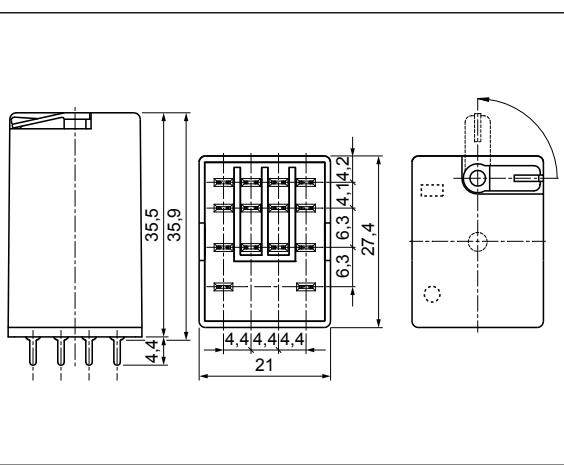

## Mounting, sockets and accessories for relays


Relays R4N are offered in versions: • for plug-in sockets • for PCB. With **WT equipment as standard** (W - mechanical indicator + T - lockable front test button). In these relays is **possibility self-exchange of button type T for test button R4P-0001** (no latching) **or on plug R4W-0003** (no manual operation). The buttons **R4P-0001** and the plugs **R4W-0003** need to be ordered separately.

Sockets for R4N	Accessories			Additional equipment
	Retainer / retractor clips	Spring wire clips	Description plates	
<b>Screw terminals sockets</b> , 35 mm rail mount (acc. to EN 60715) or on panel mounting (two M3 screws)				
GZT4	GZT4-0040, GZP4-0400	G4 1052	GZT4-0035	M... ②, ZGGZ4 ④
GZM4	GZT4-0040, GZP4-0400	G4 1052	GZT4-0035	M... ②, ZGGZ4 ④
GZ4	—	G4 1052	—	—
GS4	—	GS4-0036	GS4-0035	—
<b>Push-in terminals sockets</b> , 35 mm rail mount (acc. to EN 60715) or on panel mounting (two M3 screws)				
GZP4 ②	GZP4-0400, GZT4-0040	G4 1052	MP15	M... ②, ZGZP4-8, ZGZP4-2, ZGZP-2 ④
<b>Sockets for PCB</b>				
SU4D	—	G4 1053	—	—
G4D	—	G4 1053	—	—
<b>Solder terminals sockets</b>				
SU4L	—	G4 1053	—	G4 1040 ⑤
G4	—	G4 1053	—	—

② Sockets GZP4: wire connection - see page 10. ③ Signalling / protecting modules type M... - see page 12.

④ Interconnection strips ZGGZ4, ZGZP... - see pages 13-14. ⑤ Spring clamps G4 1040.

## Connection diagram (pin side view)

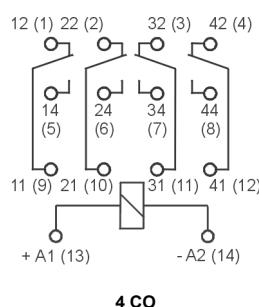


Note: the indicated polarization of the supply refers to the relays with extra equipment **D** - surge suppression element (diode) - for DC coils only.

## Electrical life at AC resistive load.


Fig. 1

Switching frequency: 1 200 cycles/hour

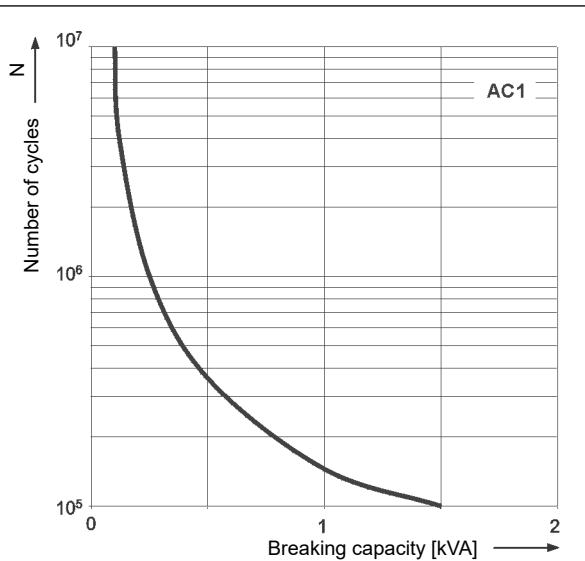

**Electrical life reduction factor  
at AC inductive load**


Fig. 2

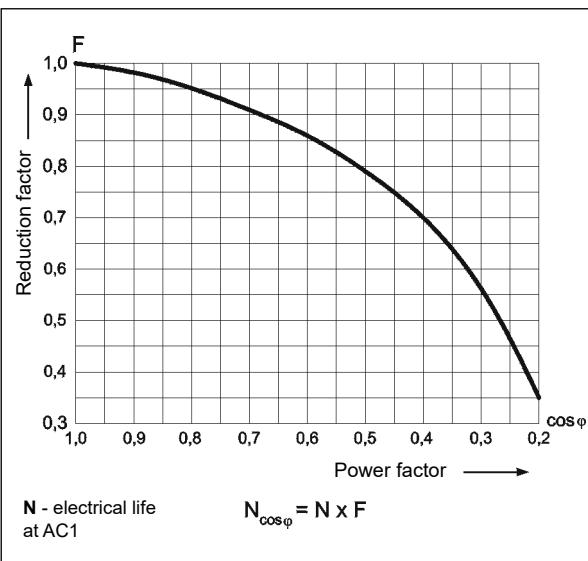

**Max. DC breaking capacity**


**A - resistive load DC1  
B - inductive load L/R = 40 ms**

Fig. 3

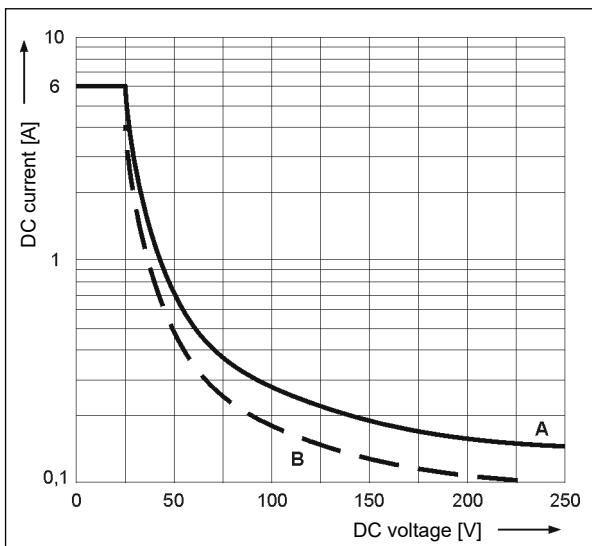


**Coil operating range - DC**

Fig. 4

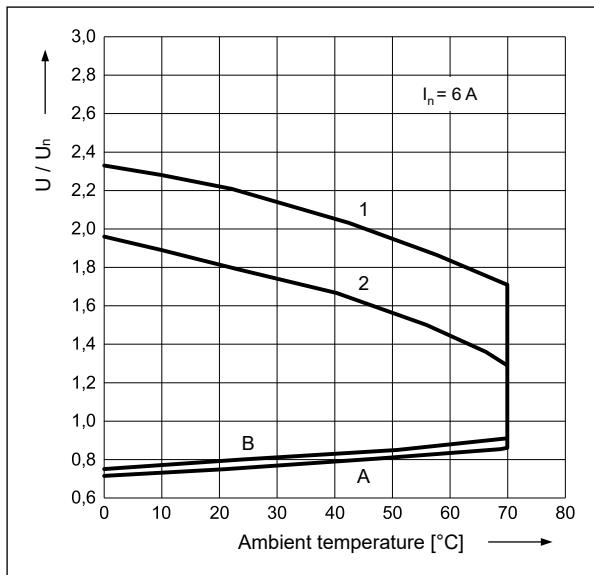

**Coil operating range - AC 50 Hz**

Fig. 5

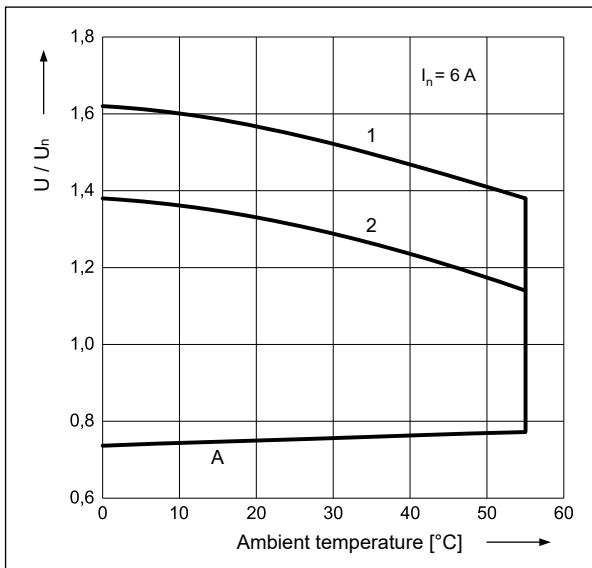

#### Description of Fig. 4 and 5

**A** - relations between make voltage and ambient temperature at no load on contacts. Coil temperature and ambient temperature are equal before coil energizing. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).

**B** - relations between make voltage and ambient temperature after initial coil heating up with  $1,1 U_n$ , at continues load of  $I_n$  on contacts. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).

**1, 2** - values on Y axis represent allowed overvoltage on coil at certain ambient temperature and contact load:

**1** - no load

**2** - rated load

**Contact material selection for different load types**

- **AgNi** - for resistive or inductive loads,
- **AgNi/Au flash gold plating** - Au protects the contact surface during storage,
- **AgNi/Au hard gold plating** - for small resistive loads in control circuits.

**Coil data - DC voltage version**

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC	
				min. (at 20 °C)	max. (at 70 °C)
1005	5	28	± 10%	4,0	5,5
1006	6	40	± 10%	4,8	6,6
<b>1012</b>	<b>12</b>	<b>160</b>	<b>± 10%</b>	<b>9,6</b>	<b>13,2</b>
<b>1024</b>	<b>24</b>	<b>640</b>	<b>± 10%</b>	<b>19,2</b>	<b>26,4</b>
1048	48	2 600	± 10%	38,4	52,8
1060	60	4 000	± 10%	48,0	66,0
1080	80	7 100	± 10%	64,0	88,0
1110	110	13 600	± 10%	88,0	121,0
1125	125	16 000	± 10%	100,0	137,5
<b>1220</b>	<b>220</b>	<b>54 000</b>	<b>± 10%</b>	<b>176,0</b>	<b>242,0</b>

The data in bold type relate to the standard versions of the relays.

**Coil data - AC 50/60 Hz voltage version**

Table 2

Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC	
				min. (at 20 °C)	max. (at 55 °C)
5006	6	9,8	± 10%	4,8	6,6
5012	12	39,5	± 10%	9,6	13,2
<b>5024</b>	<b>24</b>	<b>158</b>	<b>± 10%</b>	<b>19,2</b>	<b>26,4</b>
5042	42	470	± 10%	33,6	46,2
5048	48	640	± 10%	38,4	52,8
5060	60	930	± 10%	48,0	66,0
5080	80	1 720	± 10%	64,0	88,0
5110	110	3 450	± 10%	88,0	121,0
5115	115	3 610	± 10%	92,0	127,0
5120	120	3 770	± 10%	96,0	132,0
5127	127	4 000	± 10%	101,6	139,0
5220	220	15 400	± 10%	176,0	242,0
<b>5230</b>	<b>230</b>	<b>16 100</b>	<b>± 10%</b>	<b>184,0</b>	<b>253,0</b>
5240	240	16 800	± 10%	192,0	264,0

The data in bold type relate to the standard versions of the relays.


**Relays for railroad industry**

**PIR4T**  
- interface



**R4T**  
- industrial

**Ordering codes**

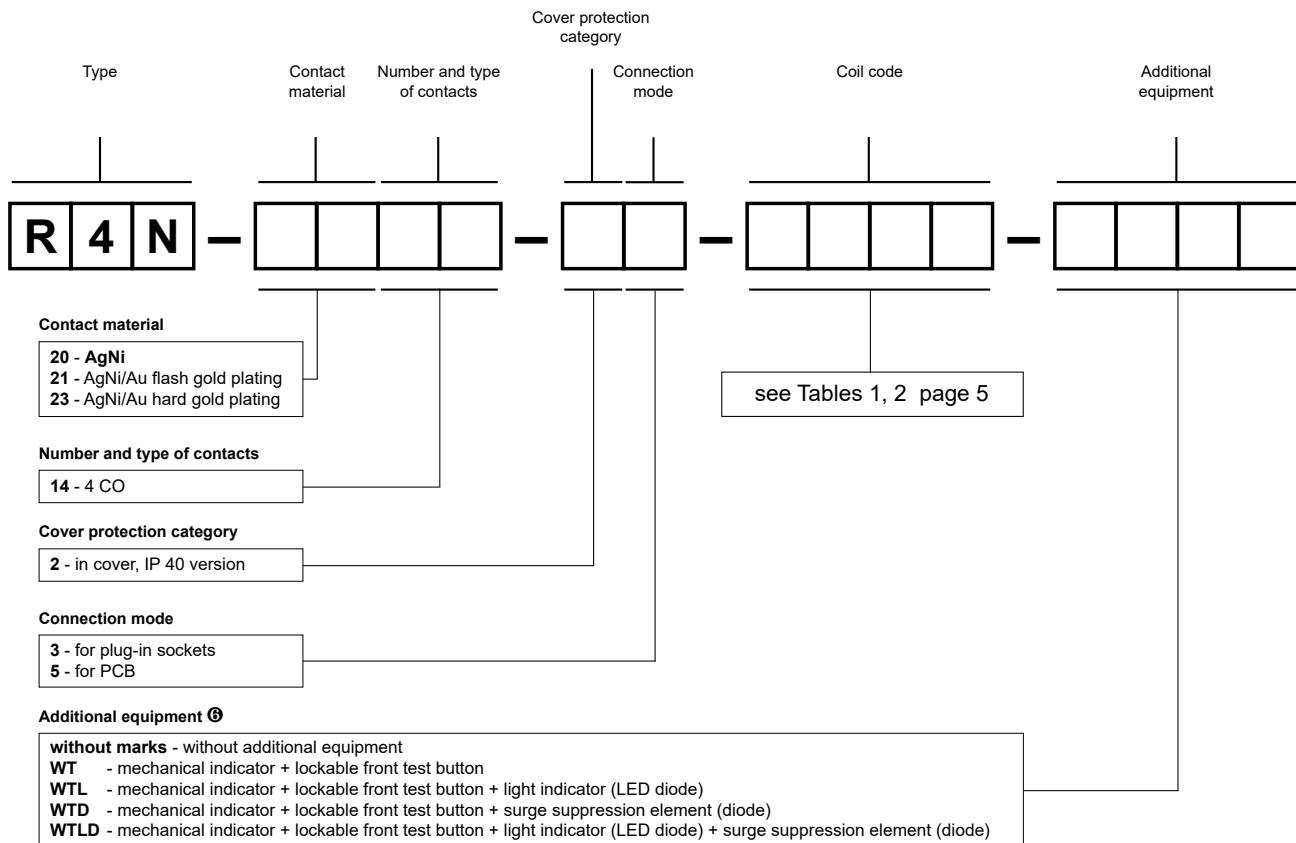

⑥ **T** - orange colour (AC coils), green (DC coils). **WT** - standard equipment of relays. **WTD, WTLD** - available only in relays with DC coils.

**Test buttons (no latching) and plugs** need to be ordered separately. They substitute buttons type T. To exchange by Customer themselves. Information on test buttons (no latching) and plugs - page 8.

- Button R4P-0001-A - orange colour (AC coils)
- Button R4P-0001-D - green colour (DC coils)
- Plug R4W-0003-A - orange colour (AC coils)
- Plug R4W-0003-D - green colour (DC coils)

**Note:**

While the relay operates, the test button of the **T** type becomes heated. In order to push the test button manually, you should first turn the supply voltage off, and wait some time until the button becomes colder (or push the button immediately using a protective glove or an insulated tool). The button shall be pushed smoothly and quickly. The normally open contacts are closed with the button for the time during which the button is pushed. Releasing the button opens the normally open contacts. Normally open contacts may be closed with the blocking function of the button (it shall be turned by 90°). When the button is turned back, the normally open contacts are opened.

For relays with additional equipment **D** - surge suppression element (diode) (versions **WTD** and **WTLD**) - fixed supply polarization compulsory for the DC load of coils: +A1(13) / -A2(14). The polarization is indicated on the relay cover. For other versions of the relays with DC coils any polarization is possible.

**Examples of ordering codes:**

**R4N-2014-23-5230-WTL** relay **R4N**, for plug-in sockets, four changeover contacts, contact material AgNi, coil voltage 230 V AC 50/60 Hz, with mechanical indicator and lockable front test button and light indicator (LED diode), in cover IP 40

**R4N-2014-25-1024-WT** relay **R4N**, for PCB, four changeover contacts, contact material AgNi, coil voltage 24 V DC, with mechanical indicator and lockable front test button, in cover IP 40

## Additional equipment for industrial relays

Industrial relays for plug-in sockets: R2N, R3N, R4N, R15 - 2 CO ②, R15 - 3 CO ② **with WT equipment as standard** (W - mechanical indicator + T - lockable front test button). **Detailed information** on additional equipment of individual relays can be found in the data sheets on the side of "Ordering codes".

### Note:

While the relay operates, the test button of the T type becomes heated. In order to push the test button manually, you should first turn the supply voltage off, and wait some time until the button becomes colder (or push the button immediately using a protective glove or an insulated tool). The button shall be pushed smoothly and quickly. The normally open contacts are closed with the button for the time during which the button is pushed. Releasing the button opens the normally open contacts. Normally open contacts may be closed with the blocking function of the button (it shall be turned by 90°). When the button is turned back, the normally open contacts are opened.

Type ①	Description	For industrial relays
W	mechanical indicator	R2N, R3N, R4N, (R15 - 2 CO, 3 CO ②)
T	lockable front test button, orange (AC coils), green (DC coils)	R2N, R3N, R4N, (R15 - 2 CO, 3 CO ②)
L	light indicator (LED diode), located inside the relay	R2N, R3N, R4N, (R15 - 2 CO, 3 CO, 4 CO ②) RUC, RUC-M
D	surge suppression element (diode) - only for DC coils	R2N, R3N, R4N, (R15 - 2 CO, 3 CO, 4 CO ②)
V	surge suppression element (varistor) - only for AC coils	(R15 - 2 CO, 3 CO ②)
K	test button without block function, orange (AC coils), green (DC coils)	(R15 - 4 CO ②), RUC

① Available combinations:

WT, WTL, WTD, WTLD - in relays R2N, R3N, R4N for plug-in sockets

WT, WTL, WTD, WTLD, WTV, WTLV - in relays R15 - 2 CO, 3 CO for plug-in sockets


K, L, D, KL, KD, LD, KLD - in relays R15 - 4 CO for plug-in sockets

K, L, KL - in relays RUC

L - in relays RUC-M

② Voltage versions, in covers

### Test buttons type T R2N, R3N, R4N

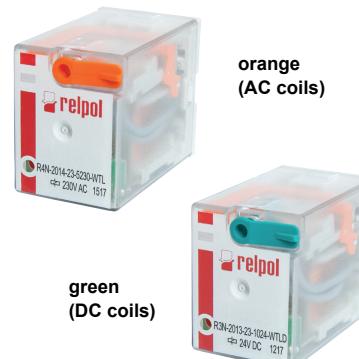

## Test buttons (no latching) and plugs


**Test buttons (no latching)** are recommended for R2N...WT, R3N...WT, R4N...WT, R15...WT 2 CO, R15...WT 3 CO relays - **for applications that do not allow permanent contact latching**. By manual operation (pressing the button) relay contacts can get switched for as long time as long the button is pressed. Contacts return to initial position as soon as pressure is released from the button. Those operations can be done while the coil is deenergized ③.

Button **R4P-0001** or **R15-M404** can be easily inserted by the Customer after removal of button type **T** (see Fig. 2). Button type **T** can be removed with screwdriver as shown on Fig. 1.

③ While the relay operates, the test button becomes heated. In order to push the test button manually, you should first turn the supply voltage off, and wait some time until the button becomes colder (or push the button immediately using a protective glove or an insulated tool). The button shall be pushed smoothly and quickly.




### Dimensions - test button R4P-0001 for R2N...WT, R3N...WT, R4N...WT

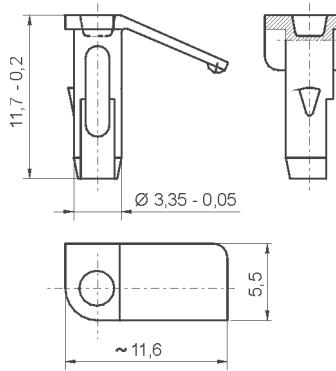

Types of buttons:  
**R4P-0001-A** - orange colour (AC coils)  
**R4P-0001-D** - green colour (DC coils)


### Dimensions - test button R15-M404 for R15...WT 2 CO, R15...WT 3 CO

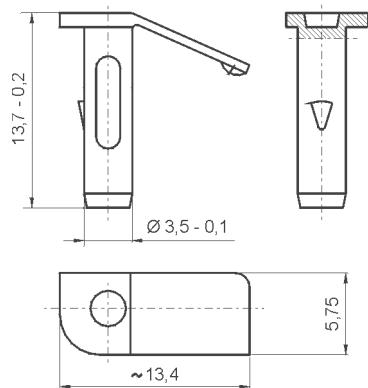

Types of buttons:  
**R15-M404-A** - orange colour (AC coils)  
**R15-M404-D** - green colour (DC coils)


Plugs **R4W-0003** or **R15-M203** can substitute button type **T** if **manual operation (latching and testing) is not allowed**. Changing button type **T** for plug can be done by Customer themselves in the same way as changing button type **T** for button (no latching).

### Dimensions - plug R4W-0003 for R2N...WT, R3N...WT, R4N...WT

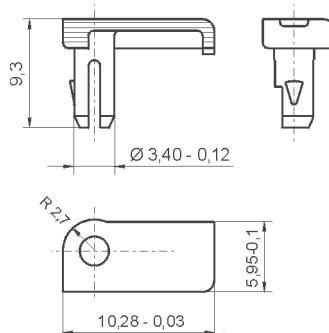

Types of plugs:  
**R4W-0003-A** - orange colour (AC coils)  
**R4W-0003-D** - green colour (DC coils)

### Dimensions - plug R15-M203 for R15...WT 2 CO, R15...WT 3 CO

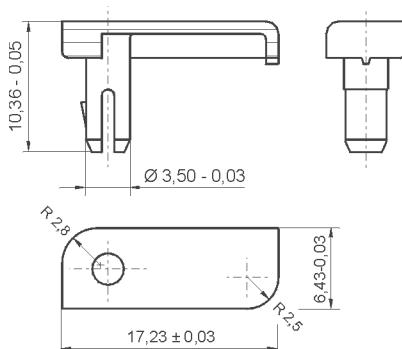

Types of plugs:  
**R15-M203-A** - orange colour (AC coils)  
**R15-M203-D** - green colour (DC coils)

## Sockets and accessories


### GZT4 ③

For R4N, T-R4

Screw terminals  
Max. tightening moment  
for the terminal: 0,7 Nm  
35 mm rail mount  
acc. to EN 60715  
or on panel mounting  
76,3 x 27 x 42,5(80) mm ②  
Four poles  
6 A, 300 V AC



#### Connection diagram [Installation instruction](#)

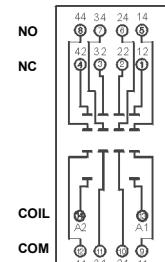

ZGGZ4




GZP4-0400



GZT4-0040

#### Accessories ①

### Connection diagram

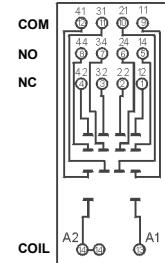

ZGGZ4




GZP4-0400




GZT4-0040

#### Accessories ①

### Dimensions

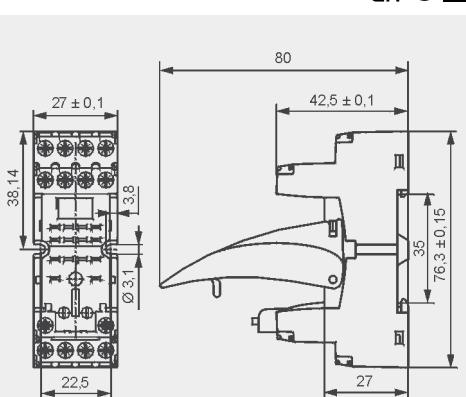

### Dimensions

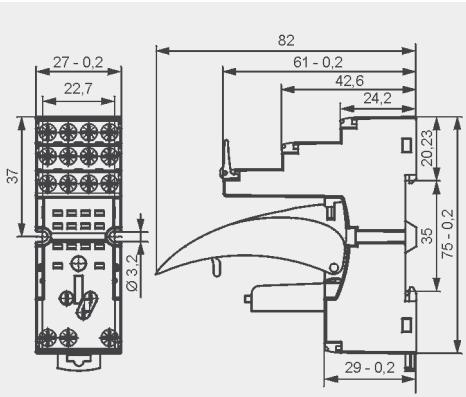

### GZM4

For R4N, T-R4

Screw terminals  
Max. tightening moment  
for the terminal: 0,7 Nm  
35 mm rail mount  
acc. to EN 60715  
or on panel mounting  
75 x 27 x 61(82) mm ②  
Four poles  
6 A, 300 V AC



① Mounting and sub-assemblies of accessories in the socket - see page 9. Signalling / protecting modules type M... - see page 12.

② In the bracket the height of socket with retainer / retractor clip is shown. ③ Have obtained LR Type Approval Certificate (Lloyd's Register).


## Mounting and sub-assemblies of the relay and accessories in the socket

Signalling / protecting module  
type M...




Electromagnetic  
relay

Retainer / retractor clip

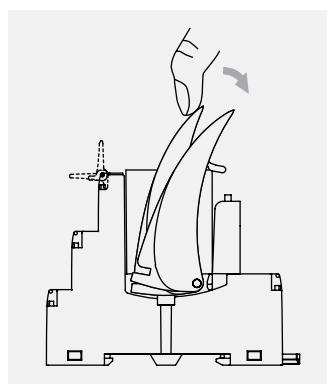

Removing the relay from the socket  
with a retainer / retractor clip

Screw terminals  
plug-in socket

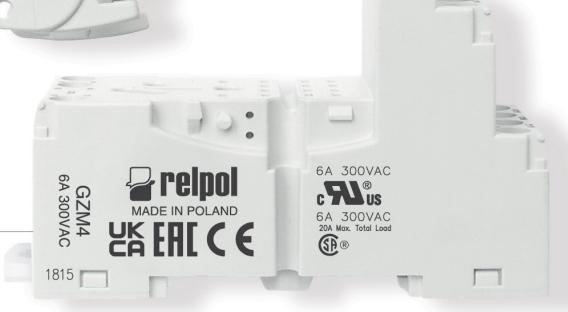

Description plate

## Sockets and accessories


### GZP4

For R4N, R2N


Push-in terminals  
(flammability class V-0)

Max. cross section of the cables:  
2 x 1,5 mm<sup>2</sup> (ferrules without insulation)  
2 x 1 mm<sup>2</sup> (ferrules with insulation)  
Stripping length: 8...10 mm

35 mm rail mount  
acc. to EN 60715  
or on panel mounting  
97 x 31 x 45,9(75,8) mm ②  
Two poles  
12 A, 300 V AC  
Four poles  
8 A, 300 V AC

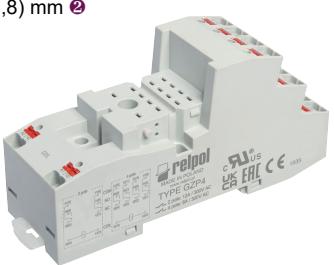


### Connection diagrams

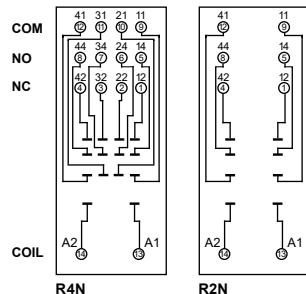

### Dimensions

CE cULus UL CD

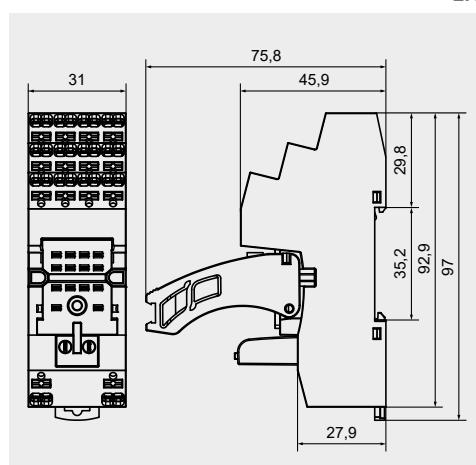

The drawings present  
inserting wire into the  
Push-in terminal and  
removing wire using the  
button releasing a clamp  
(assembly without tools).



### Accessories ①


### GZ4

For R4N

Screw terminals  
Max. tightening moment  
for the terminal: 0,7 Nm  
35 mm rail mount  
acc. to EN 60715  
or on panel mounting  
66,4 x 29,5 x 29 mm  
Four poles  
10 A, 300 V AC




### Connection diagram

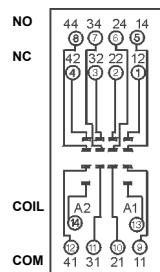

### Dimensions

CE

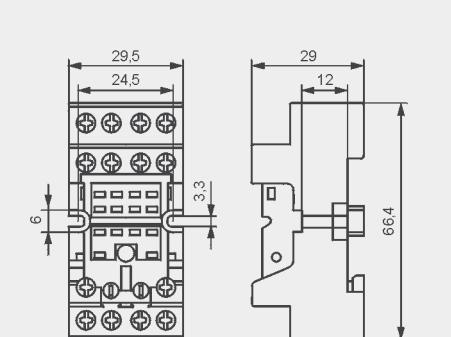

### Accessories




### GS4

For R4N

Screw terminals  
Max. tightening moment  
for the terminal: 0,7 Nm  
35 mm rail mount  
acc. to EN 60715  
or on panel mounting  
67 x 30,8 x 30(~63,7) mm ④  
Four poles  
10 A, 300 V AC




### Connection diagram

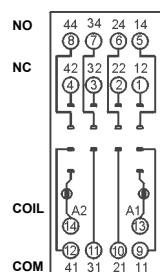

### Dimensions

CE cULus

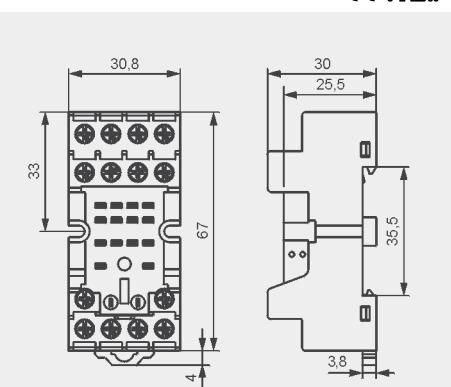

### Accessories



① Mounting and sub-assemblies of accessories in the socket - see page 9. Signalling / protecting modules type M... - see page 12.

② In the bracket the height of socket with retainer / retractable clip is shown. ④ In the bracket the height of socket with spring wire clip is shown.



## Signalling / protecting modules type M...

### For sockets type:

GZT80, GZM80, GZS80, GZP80, GZT92, GZM92, GZS92, ES 32, GZT2, GZM2, GZT3, GZM3, GZT4, GZM4, GZP4

Modules type M... are parallely connected with relay coil.  
Polarization P: -A1/+A2. Polarization N: +A1/-A2.



Modules type M...	Layout	Voltage	Type of module ① ②
<b>Module D (polarization P)</b> It limits overvoltage on DC coils.	+A2 o --- A1 o	6/230 V DC	M21P
<b>Module D (polarization N)</b> It limits overvoltage on DC coils.	-A2 o --- +A1 o	6/230 V DC	M21N
<b>Module LD (polarization P)</b> It limits overvoltage on DC coils. Coil energizing indication.	+A2 o --- A1 o	6/24 V DC 24/60 V DC 110/230 V DC	M31R, M31G M32R, M32G M33R, M33G
<b>Module LD (polarization N)</b> It limits overvoltage on DC coils. Coil energizing indication.	-A2 o --- +A1 o	6/24 V DC 24/60 V DC 110/230 V DC	M41R, M41G M42R, M42G M43R, M43G
<b>Module RC</b> It protects against EMC disturbance. It limits overvoltage.	A2 o --- A1 o	6/24 V AC/DC 24/60 V AC/DC 110/240 V AC/DC	M51 M52 M53
<b>Module L</b> Coil energizing indication.	= A2 o --- A1 o	6/24 V AC/DC 24/60 V AC/DC 110/240 V AC/DC	M61R, M61G M62R, M62G M63R, M63G
<b>Module LV</b> It limits overvoltage on AC and DC coils. Coil energizing indication.	= A2 o --- A1 o	6/24 V AC/DC 24/60 V AC/DC 110/240 V AC/DC	M91R, M91G M92R, M92G M93R, M93G
<b>Module V</b> It limits overvoltage on AC coils. No indication.	A2 o --- A1 o	6/24 V AC 110/130 V AC 220/240 V AC	M71 M72 M73
<b>Module R</b> It limits harmful voltage on AC coils induced in long lines which causes unwanted making of the relay.	A1 o --- A2 o	110/240 V AC	M103

① M...R - LED red, M...G - LED green

② When ordering modules indicate their color: gray or black.



### PRECAUTIONS:

1. Ensure that the parameters of the product described in its specification provide a safety margin for the appropriate operation of the device or system and never use the product in circumstances which exceed the parameters of the product. 2. Never touch any live parts of the device. 3. Ensure that the product has been connected correctly. An incorrect connection may cause malfunction, excessive heating or risk of fire. 4. In case of any risk of any serious material loss or death or injuries of humans or animals, the devices or systems shall be designed so to equip them with double safety system to guarantee their reliable operation.

## Interconnection strips ZGGZ4




### ■ ZGGZ4 for:

Plug-in sockets	Relays for plug-in sockets	Interface relays ③
GZM2	R2N	PIR2-...-00L. (R2N + GZM2)
GZT2		
GZM3	R3N	PIR3-...-00L. (R3N + GZM3)
GZT3		
GZM4	R4N	PIR4-...-00L. (R4N + GZM4)
GZT4		

③ Interface relay PIR2 (PIR3, PIR4) is offered as a set: electromagnetic relay R2N (R3N, R4N) + plug-in socket GZM2 (GZM3, GZM4) + signalling / protecting module type M... + retainer / retractor clip GZT4-0040 + description plate GZT4-0035.


### ■ Interconnection strip ZGGZ4

- designed for the co-operation with plug-in sockets of miniature industrial relays and with interface relays PIR2, PIR3 and PIR4, which are equipped with screw terminals; sockets and relays are mounted on 35 mm rail mount acc. to EN 60715,
- bridges common input signals (coil terminals A1 or A2) or output signals - see photo at the top,
- maximum permissible current is 10 A / 250 V AC,
- possibility of connection of 6 sockets or relays,
- colours of strips: **ZGGZ4-1** grey, **ZGGZ4-2** black.

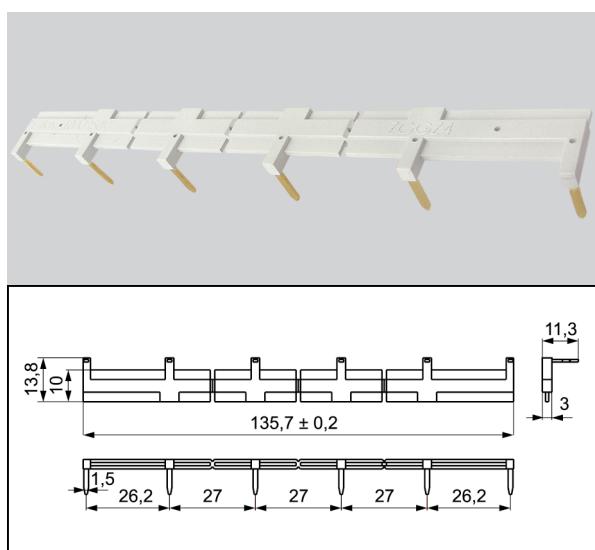

28.11.2025

## Interconnection strips ZGZP... for sockets GZP4

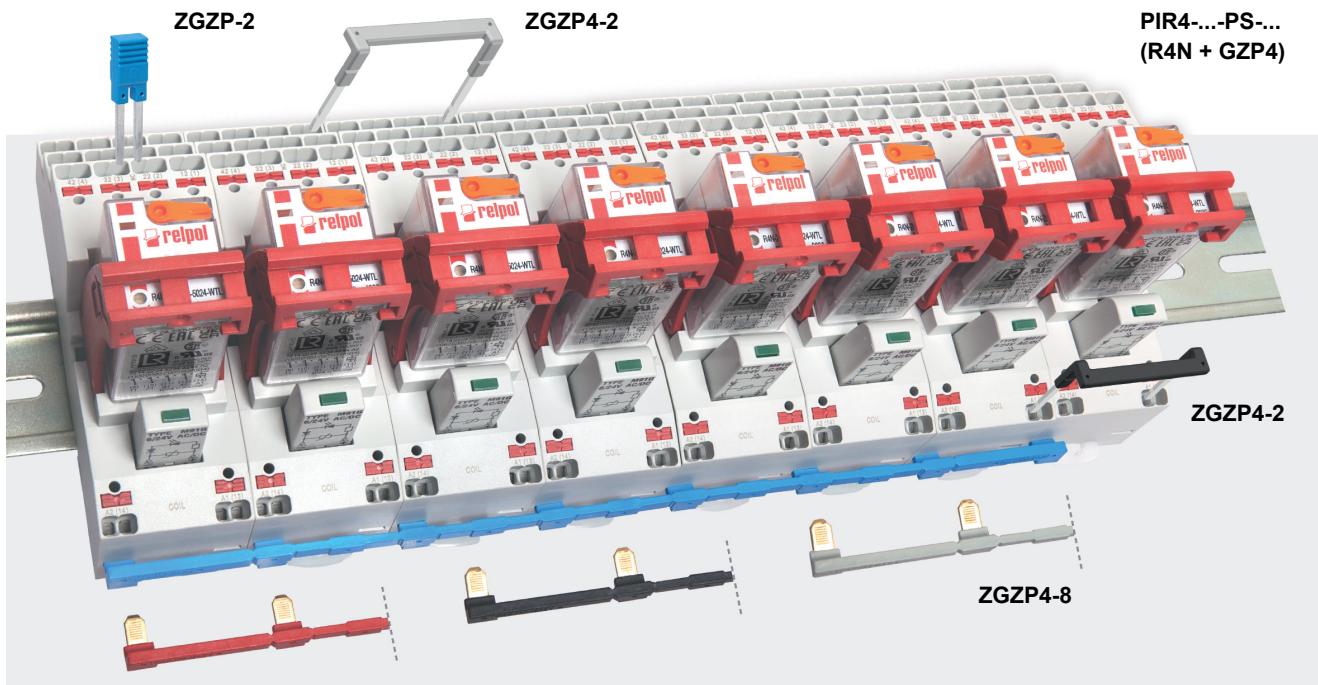

### ■ ZGZP... for:

Plug-in sockets	Relays for plug-in sockets	Interface relays ④
GZP4	R2N	PIR2-...-PS-... (R2N + GZP4)
	R4N	PIR4-...-PS-... (R4N + GZP4)

④ Interface relay **PIR2** (**PIR4**) is offered as a **set**: electromagnetic relay **R2N** (**R4N**) + plug-in socket **GZP4** + signalling / protecting module type **M...** + retainer / retractor clip **GZP4-0400**.

### ■ Interconnection strips ZGZP...

- designed for the co-operation with plug-in sockets of miniature industrial relays and with interface relays PIR2 and PIR4, which are equipped with screw terminals; sockets and relays are mounted on 35 mm rail mount acc. to EN 60715,
- strip **ZGZP4-8** bridges common input signals (coil terminals A1 or A2), maximum permissible current is 10 A / 250 V AC, possibility of connection of 8 sockets or relays,



- strip **ZGZP4-2** bridges common input signals (coil terminals A1 or A2) or output signals, possibility of connection of 2+n sockets or relays,



- jumper **ZGZP-2** bridges the neighboring poles of single socket **GZP4**.

