



P052




P053




P055



► P052

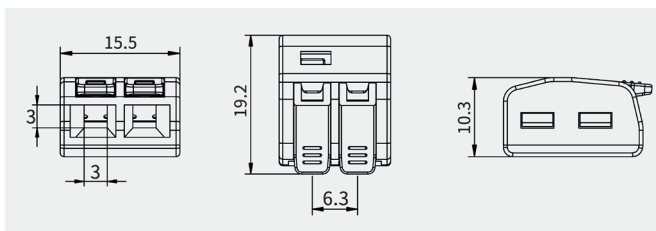

► P053

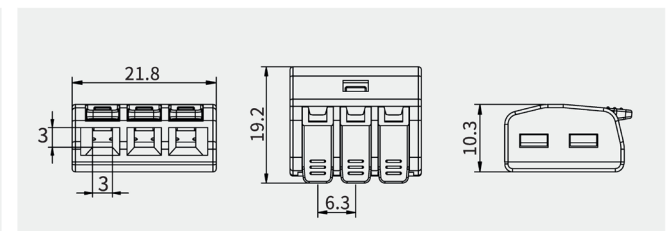

► P055

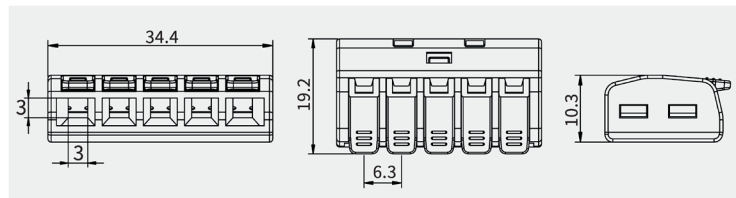

obudowa wykonana z wysokiej jakości poliwęglanu



łatwe w użyciu



pewny ścisk przewodu poprzez system dźwigni



kod

E03-P052-10  
E03-P052-100  
E03-P053-10  
E03-P053-50  
E03-P055-10  
E03-P055-25



EAN

5900280946584  
5900280933171  
5900280946591  
5900280941480  
5900280946607  
5900280941497



opakowanie

10  
100  
10  
50  
10  
25



ilość otworów

2  
2  
3  
3  
5  
5



przekrój przewodu

0.2 ÷ 4mm<sup>2</sup>  
0.2 ÷ 4mm<sup>2</sup>  
0.2 ÷ 4mm<sup>2</sup>  
0.2 ÷ 4mm<sup>2</sup>  
0.2 ÷ 4mm<sup>2</sup>  
0.2 ÷ 4mm<sup>2</sup>

I<sub>max</sub>

max. obciążenie [A]

32  
32  
32  
32  
32  
32