




## Właściwości styków


|                                      |             |        |
|--------------------------------------|-------------|--------|
| Liczba pól                           | Nr.         | 3      |
| Prąd roboczy Ie                      |             |        |
|                                      | AC-4 (400V) | A 260  |
| Znamionowa moc robocza AC-3 (T≤55°C) | 400 V       | kW 355 |

## Wymiary

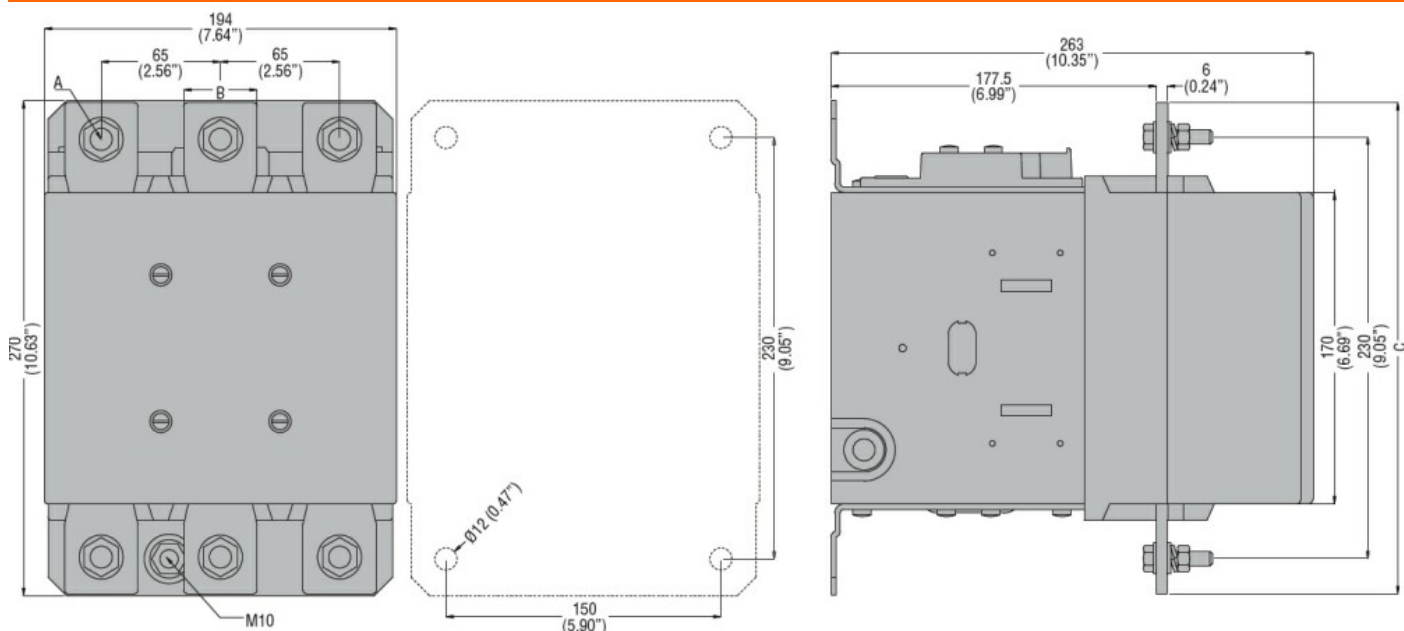

| CONTACTOR TYPE | A   | B          | C            |
|----------------|-----|------------|--------------|
| B500           | M10 | 35 (1.38") | 265 (10.43") |
| B630           | M12 | 40 (1.57") | 270 (10.63") |

## Schemat połączeń elektrycznych

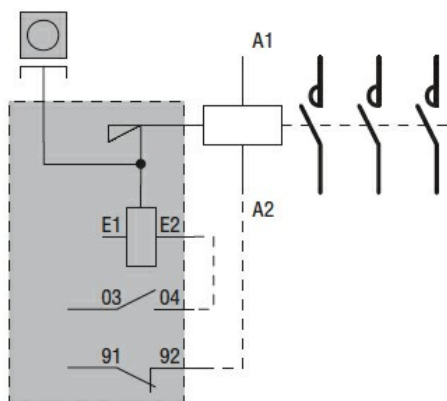

## Certyfikaty i zgodność

### Zgodność

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certyfikaty

cULus