

# RPC-.MA-...

## time relays



RPC-1MA-UNI  
RPC-2MA-UNI



RPC-1MA-A230  
RPC-2MA-A230  
RPC-2MA-UNI-01



- Multifunction time relays (10 time functions; 8 time ranges)
- Cadmium - free contacts 1 CO and 2 CO
- AC and AC/DC input voltages
- Cover - modular, width 17,5 mm
- Direct mounting on 35 mm rail mount acc. to EN 60715
- Applications: in low-voltage systems, available special version for low-current applications ❶
- Compliance with standard EN 61812-1 • Directive RoHS

### Output circuit - contact data

|   |   |  |
|---|---|--|
| Number and type of contacts               | 1 CO  | 2 CO   |
| Contact material                          | <b>AgSnO<sub>2</sub>, AgNi ❶</b>                            |  |
| Max. switching voltage                    | 300 V AC  |  |
| Rated load                                | AC1<br>DC1<br>DC1   | 8 A / 250 V AC<br>8 A / 24 V DC<br>0,3 A / 250 V DC  |
| Rated current                             | 16 A / 250 V AC   | 8 A / 250 V AC   |
| Max. breaking capacity                    | AC1   | 4 000 VA   |
| Min. breaking capacity                    | 1 W 10 mA, AgSnO <sub>2</sub> , 0,3 W 5 mA, AgNi ❶          |  |
| Contact resistance                        | ≤ 100 mΩ  |  |
| Max. operating frequency                  | 600 cycles/hour at rated load AC1                           |  |
| <b>Input circuit</b>                      |   |  |
| Rated voltage                             | 50/60 Hz AC<br>AC: 50/60 Hz AC/DC                           | 230 V terminals A1, A2<br>12...240 V terminals (+)A1, (-)A2  |
| Must release voltage                      | ≥ 0,1 U <sub>n</sub>  |  |
| Operating range of supply voltage         | 0,9...1,1 U <sub>n</sub>                                    |  |
| Rated power consumption                   | AC<br>DC  | ≤ 3,5 VA 230 V AC, 50 Hz<br>≤ 1,5 W 12...240 V AC/DC   |
| Range of supply frequency                 | AC  | 48...63 Hz   |
| <b>Control contact S ❷</b>                | • min. voltage ❸<br>• min. time of pulse duration ❹         | 0,7 U <sub>n</sub><br>AC: ≥ 50 ms DC: ≥ 30 ms  |
| <b>Insulation according to EN 60664-1</b> |   |  |
| Insulation rated voltage                  | 250 V AC  |  |
| Rated surge voltage                       | 4 000 V 1,2 / 50 μs   |  |
| Overvoltage category                      | III   |  |
| Insulation pollution degree               | 2   |  |
| Flammability class                        | V-0 for modular cover, UL 94                                |  |
| Dielectric strength                       | • input - output<br>• contact clearance<br>• pole - pole    | 4 000 V AC type of insulation: basic<br>1 000 V AC type of clearance: micro-disconnection<br>2 000 V AC contacts 2 CO, type of insulation: basic |
| <b>General data</b>                       |   |  |
| Electrical life                           | • resistive AC1   | > 0,5 x 10 <sup>5</sup> 16 A, 8 A, 250 V AC  |
| Mechanical life (cycles)                  | > 3 x 10 <sup>7</sup>                                       |  |
| Dimensions (L x W x H)                    | 90 ❺ x 17,5 x 64,6 mm                                       |  |
| Weight                                    | contact 1 CO: 65...66 g                                     | contacts 2 CO: 72...73 g   |
| Ambient temperature                       | • storage<br>(non-condensation and/or icing)<br>• operating | -40...+70 °C<br>-20...+50 °C   |
| Cover protection category                 | IP 20   | EN 60529   |
| Relative humidity                         | up to 85%   |  |
| Shock resistance                          | 15 g  |  |
| Vibration resistance                      | 0,35 mm DA 10...55 Hz                                       |  |

The data in bold type relate to the standard versions of the relays. ❶ Special version - relays with two changeover contacts 2 CO, contact material AgNi, for low-current applications - min. switching current 5 mA, only available with input 12...240 V AC/DC. See Table 1, "Time relay code" column.  
❷ The control terminal S is activated by connection to A1 terminal via the external control contact S. ❸ Where the control signal is recognizable.  
❹ Length with 35 mm rail catches: 98,8 mm.

Table of codes

Table 1

| Time relay code   |                    | Rated input voltage           | Recognitions, certifications |
|-------------------|--------------------|-------------------------------|------------------------------|
| with 1 CO contact | with 2 CO contacts |                               |                              |
| RPC-1MA-UNI       | RPC-2MA-UNI        | 12...240 V AC/DC AC: 50/60 Hz | CE, cULus, EAC, UKCA         |
| —                 | RPC-2MA-UNI-01     | 12...240 V AC/DC AC: 50/60 Hz | CE, EAC, UKCA                |
| RPC-1MA-A230      | RPC-2MA-A230       | 230 V AC 50/60 Hz             | CE, EAC, UKCA                |


### Time module data

|  |  |  |
|--|--|--|
| Functions                              | E, Wu, Bp, Bi, R, Ws, Wa, Esa, B, T  |  |
| Time ranges                            | OFF - permanent switching off; ON - permanent switching on<br>1 s ⑥; 10 s; 1 min.; 10 min.; 1 h; 10 h; 1 d; 10 d                             |  |
| Timing adjustment                      | smooth - (0,1...1) x time range (does not refer to range ON / OFF)   |  |
| Setting accuracy                       | ± 5% ⑥ ⑥   |  |
| Repeatability                          | ± 0,5% ⑥   |  |
| Values affecting the timing adjustment | temperature: ± 0,05% / °C      supply voltage: ± 0,01% / V   |  |
| Recovery time                          | AC   | ≤ 150 ms    230 V AC, 50 Hz      ≤ 400 ms    12...240 V AC/DC, AC: 50 Hz |
|  | DC   | ≤ 150 ms    12...240 V AC/DC   |
| LED indicator                          | green LED U ON - indication of supply voltage U<br>green LED U flashing - measurement of T time<br>yellow LED R ON/OFF - output relay status |  |

⑥ For first range setpoint (1 s) setting accuracy and repeatability are smaller than the given ones in technical parameters (significant influence of the operational relay operating time, processor start-time, and the moment of supply switching as referred to the AC supply course). ⑥ Calculated from the final range values, for the setting direction from minimum to maximum.


### Time functions

#### E - ON delay.




On applying the supply voltage U the set interval T begins - off-delay of the output relay R. After the interval T has lapsed, the output relay R switches on and remains on until supply voltage U is interrupted.

#### Wu - ON for the set interval.



Applying the supply voltage U immediately switches the output relay R on for the set interval T. After the interval T has lapsed, the output relay R switches off.


#### Bp - Symmetrical cyclical operation pause first.



Applying the supply voltage U starts the cyclical operation from the interval T - switching the output relay R off followed by switching on the output relay R for the interval T. The cyclical operation lasts until the supply voltage U is interrupted.


U - supply voltage; R - output state of the relay; S - control contact state; T - measured time; t - time axis

#### Bi - Symmetrical cyclical operation pulse first.




Applying the supply voltage U starts the cyclical operation from switching on the output relay R for the set interval T. After the interval T has lapsed, the output relay R switches off for the interval T. The cyclical operation lasts until the supply voltage U is interrupted.

#### R - OFF delay with the control contact S.



The input of the time relay is supplied with voltage U continuously. Closing of the control contact S immediately switches on the output relay R. Opening of the control contact S starts the set time of the delayed switching off of the output relay R. After the interval T has lapsed, the output relay R switches off. If the control contact S is closed during the interval T, the already measured time is reset, and the output relay R is switched on again. The OFF delay of the output relay R will start when the control contact S is opened again.


#### Ws - Single shot for the set interval triggered by closing of the control contact S.



The input of the time relay is supplied with voltage U continuously. Closing of the control contact S immediately switches the output relay R on for the set interval T. After the interval T has lapsed, the output relay R is switched off. In the course of the interval T, any opening of the control contact S does not affect the function to be performed. The output relay R may be switched on again for the set interval, after the interval T has lapsed, by closing the control contact S again.


### Time functions

**Wa** - ON for the set interval triggered with the control contact S.




The input of the time relay is supplied with voltage U continuously. Closing of the control contact S does not start the interval T, and it does not change the position of the output relay R. Opening of the control contact S immediately switches on the output relay R for the set time. After the interval T has lapsed, the output relay R switches off. Opening and closing of the control contact S in the course of the interval T does not affect the function to be performed. The output relay R may be switched on again for the set interval with another closing and opening of the control contact S.

**Esa** - ON and OFF delay with the control contact S.




The input of the time relay is supplied with voltage U continuously. Closing of the control contact S starts the interval T - on-delay of the output relay R. After the interval T has lapsed, the output relay R switches on. Opening of the control contact S begins further measurement of the interval T - off-delay of the output relay R, and after the interval has lapsed, the output relay switches off. In case the time for which the control contact S is closed in the course of measurement of the on-delay of the output relay R is shorter than the set interval T, the output relay R will switch on after the set interval T, and the output relay R will remain in on position for the interval T. When the output relay R is in on position, closing of the control contact S does not affect the function to be performed.

**B** - Cyclical operation controlled with closing of the control contact S.



The input of the time relay is supplied with U voltage continuously. Closing of the control contact S immediately switches on the output relay R. Each next closing of the control contact S results in a change of the status of the output relay R to an opposite one (the feature of a bistable relay).

**T** - Generation of the 0,5 s pulse after the interval T.



Applying the supply voltage U starts the interval T. After the interval T has lapsed, the output relay switches on for 0,5 s (the time of the NO contact of the output relay).

**ON / OFF** - Permanent switching on / off.

The functions ON and OFF are selected with T time range adjusting knob. In the ON function, the normally open contacts are closed all the time whereas in the OFF function they are open. The position of the function -adjusting knob is of no significance in these functions as is the preset measurement time. The ON or OFF functions are used for the time relay operation control in electric systems.

**U** - supply voltage; **R** - output state of the relay; **S** - control contact state; **T** - measured time; **t** - time axis

### Additional functions

**Supply diode:** it is lit permanently when the time is not being measured. In course of the T time measurement, it flashes at 500 ms period where it is lit for 50% of the time, and off for 50% of the time.

**Adjustment of the set values:**

- the values of time and range are read in the course of the relay's operation. The set values may be modified at any moment,
- no change of the function is possible in the course of the relay's operation. Any change of the settings of the relay shall be read only after the supply voltage has been switched off and on again.


**Triggering:** depending on the function to be performed, the relay is triggered with the supply voltage or by connection of the S contact to the A1 line. For DC supply, the positive pole must be connected to the A1 line. The level of the S contact activation is adjusted automatically depending on the supply voltage.

**Supply:**


- **RPC-...-A230:** the relay may be supplied with AC voltage 48...63 Hz of 207...253 V,
- **RPC-...-UNI:** the relay may be supplied with DC voltage or AC voltage 48...63 Hz of 10,8...264 V.




## Dimensions

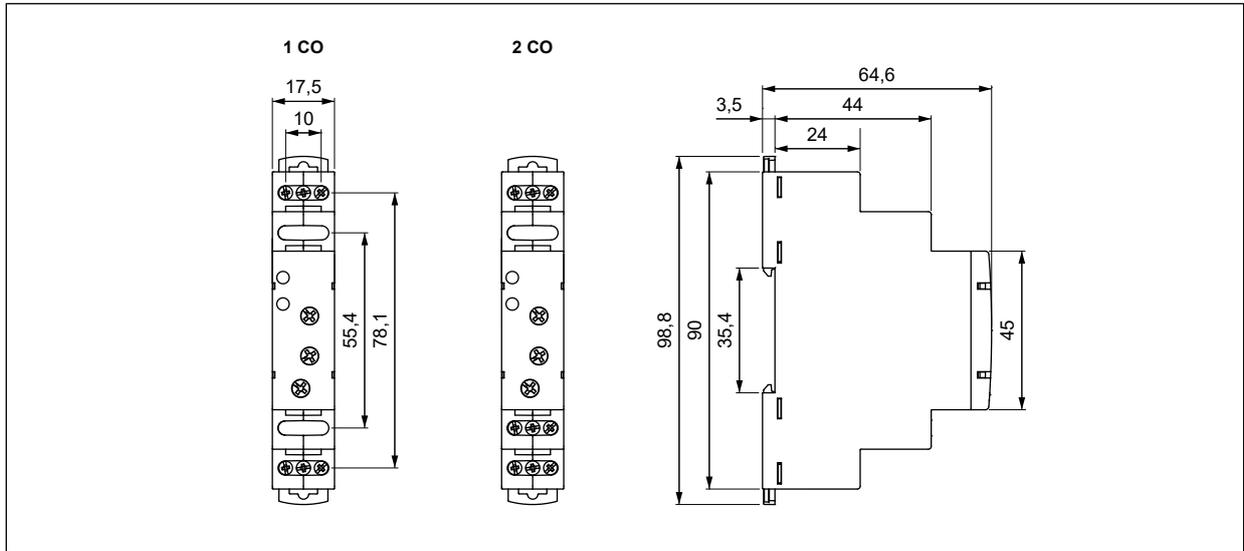

## Front panel description

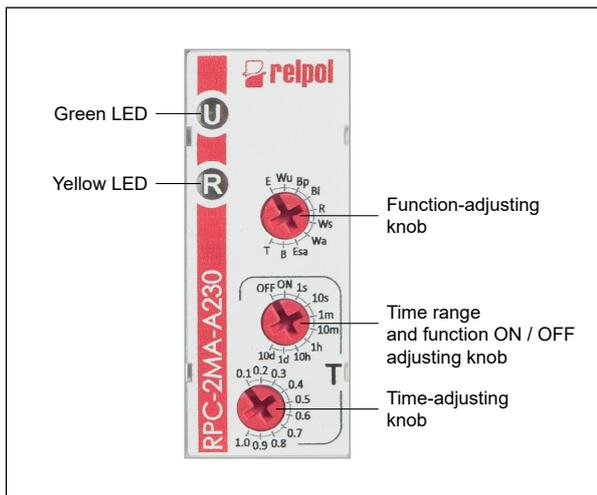

## Connection diagrams

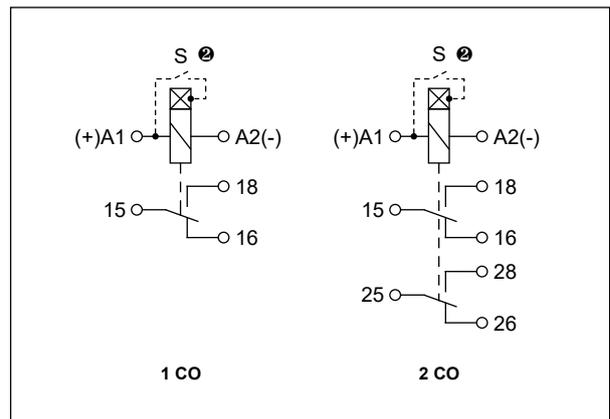


**Note:** the indicated polarization of the supply refers only to the relays RPC-...-UNI. ⚡ The control terminal S is activated by connection to A1 terminal via the external control contact S.

## Mounting

Relays **RPC-.MA-...** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. Operational position - any. **Connections:** max. cross section of the cables: 1 x 2,5 mm<sup>2</sup> (1 x 14 AWG), stripping length: 6,5 mm, max. tightening moment for the terminal: 0,5 Nm.




**Two catches:**  
easy mounting  
on 35 mm rail,  
firm hold  
(top and bottom).



**Mounting wires  
in clamps:**  
universal screw  
(cross-recessed  
or slotted head).

## Ordering codes

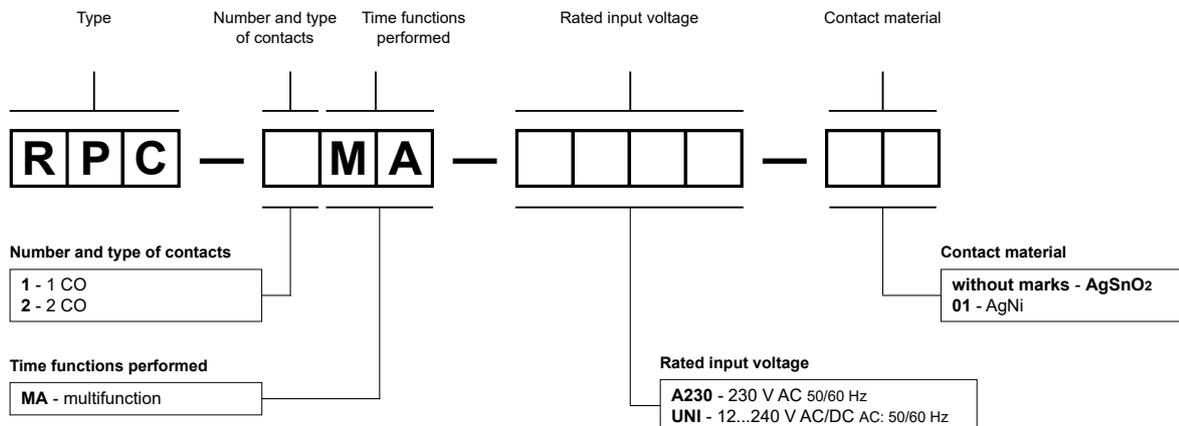

Examples of ordering codes ⑦:

- RPC-1MA-A230** time relay **RPC-MA-...**, multifunction (relay perform 10 functions), cover - modular, width 17,5 mm, one changeover contact, contact material AgSnO<sub>2</sub>, rated input voltage 230 V AC 50/60 Hz
- RPC-2MA-UNI** time relay **RPC-MA-...**, multifunction (relay perform 10 functions), cover - modular, width 17,5 mm, two changeover contacts, contact material AgSnO<sub>2</sub>, rated input voltage 12...240 V AC/DC AC: 50/60 Hz
- RPC-2MA-UNI-01** time relay **RPC-MA-...**, multifunction (relay perform 10 functions), cover - modular, width 17,5 mm, two changeover contacts, contact material AgNi, rated input voltage 12...240 V AC/DC AC: 50/60 Hz

⑦ Oznaczenia kodowe **RPC-MA-...** do składania zamówień znajdują się w Tabeli 1, w kolumnie „Kod przekaźnika czasowego”.

Table of codes

Table 1

| Time relay code   |                    | Rated input voltage           | Recognitions, certifications |
|-------------------|--------------------|-------------------------------|------------------------------|
| with 1 CO contact | with 2 CO contacts |                               |                              |
| RPC-1MA-UNI       | RPC-2MA-UNI        | 12...240 V AC/DC AC: 50/60 Hz | CE, cULus, EAC, UKCA         |
| –                 | RPC-2MA-UNI-01     | 12...240 V AC/DC AC: 50/60 Hz | CE, EAC, UKCA                |
| RPC-1MA-A230      | RPC-2MA-A230       | 230 V AC 50/60 Hz             | CE, EAC, UKCA                |

### PRECAUTIONS:

1. Ensure that the parameters of the product described in its specification provide a safety margin for the appropriate operation of the device or system and never use the product in circumstances which exceed the parameters of the product. 2. Never touch any live parts of the device. 3. Ensure that the product has been connected correctly. An incorrect connection may cause malfunction, excessive heating or risk of fire. 4. In case of any risk of any serious material loss or death or injuries of humans or animals, the devices or systems shall be designed so to equip them with double safety system to guarantee their reliable operation.