# Product End of Life Instructions

Vigi 200-440V 4P for NSX400/630







ENVEOLI2102011\_V1 03/2021

# **^**

## Potential disassembly risks

The information provided in this document assumes that the product is completely deenergized and uninstalled (refer to the instructions provided in the appropriate product manuals).

Dismantling/disassembling the product may entail hazards caused by, for example, sharp edges, chemical aggression or ejected parts.

### **A WARNING**


#### HAZARD DUE TO INSUFFICIENT PROTECTION

- Implement all safety measures required by the applicable regulations and by the processes used to dismantle/disassemble and dispose of the product.
- . Use all necessary personal protective equipment such as gloves and goggles.

Failure to follow these instructions can result in death or serious injury.

## b

## **End of Life Instructions**

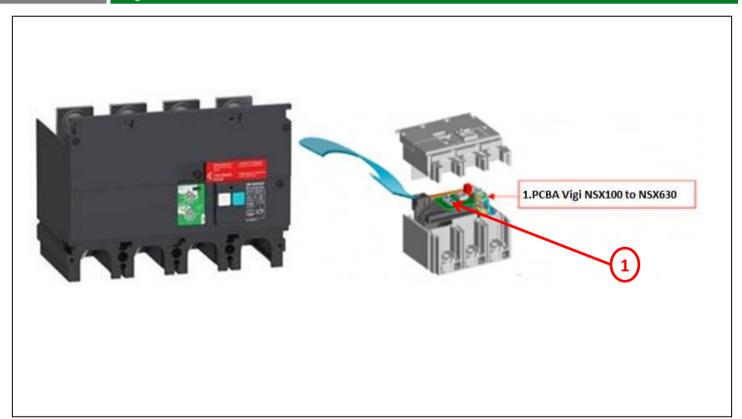

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Electronic Board (Communication) > 10cm <sup>2</sup>	19.98	PCBA Vigi NSX100 to NSX 630

ENVEOLI2102011\_V1 03/2021



## **Product description**

Manufacturer identification	Schneider Electric Industries SAS		
Brand name	Schneider Electric		
Product function	The Vigicompact NSX400/630 is the combination of compact NSX400/630 4 pole circuit breaker, Trip Unit (TMD or Electronic Micrologic) and 4 pole Vigi module.  The Compact NSX400/630 4P circuit breaker equiped with Micrologic 2.3 trip unit is designed to provide protection against overloads and short-circuits for industrial and commercial electrical distribution systems with assigned voltage upto 200 to 440V and rated current from 400A to 630A. The main purpose of the 4P Vigi module is to protect installations against insulation faults. Earth-leakage protection is achieved by installing a vigi module directly on the downstream side of the circuit breaker terminals. It directly actuates the toggle mechanism of the breaker through the trip unit (magnetic, thermal-magnetic or Micrologic).		
Product reference	LV432465		
Total representative product mass	3320 g		
Representative product dimensions	185mm x 140mm x 120mm		
Date of information release	03/2021		



Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.		
Recyclability potential	72%	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).	

Schneider Electric Industries SAS

Country Customer Care Center http://www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.se.com

Published by Schneider Electric

ENVEOLI2102011\_V1

 $\ensuremath{\text{@}}$  2019 - Schneider Electric – All rights reserved

03/2021

ENVEOLI2102011\_V1 03/2021