


# Product Environmental Profile

## RJ45 SINGLE CAT5E UTP OUTLET 2 MODULES



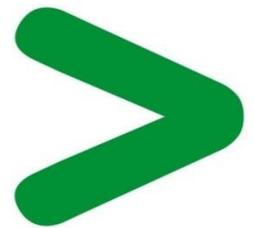

## General information

### Representative product

RJ45 SINGLE CAT5E UTP OUTLET 2 MODULES - NU341118

### Description of the product

The main function of the RJ45 SINGLE CAT5E UTP OUTLET 2 MODULES is to create connection and data transmission between RJ45 chord and wall socket for RJ45 which is the product itself.

### Functional unit


To protect, link, splice or connect a connection point during 30 years with a 70% use rate for residential applications.



## Constituent materials

### Reference product mass

76,1 g including the product, its packaging and additional elements and accessories

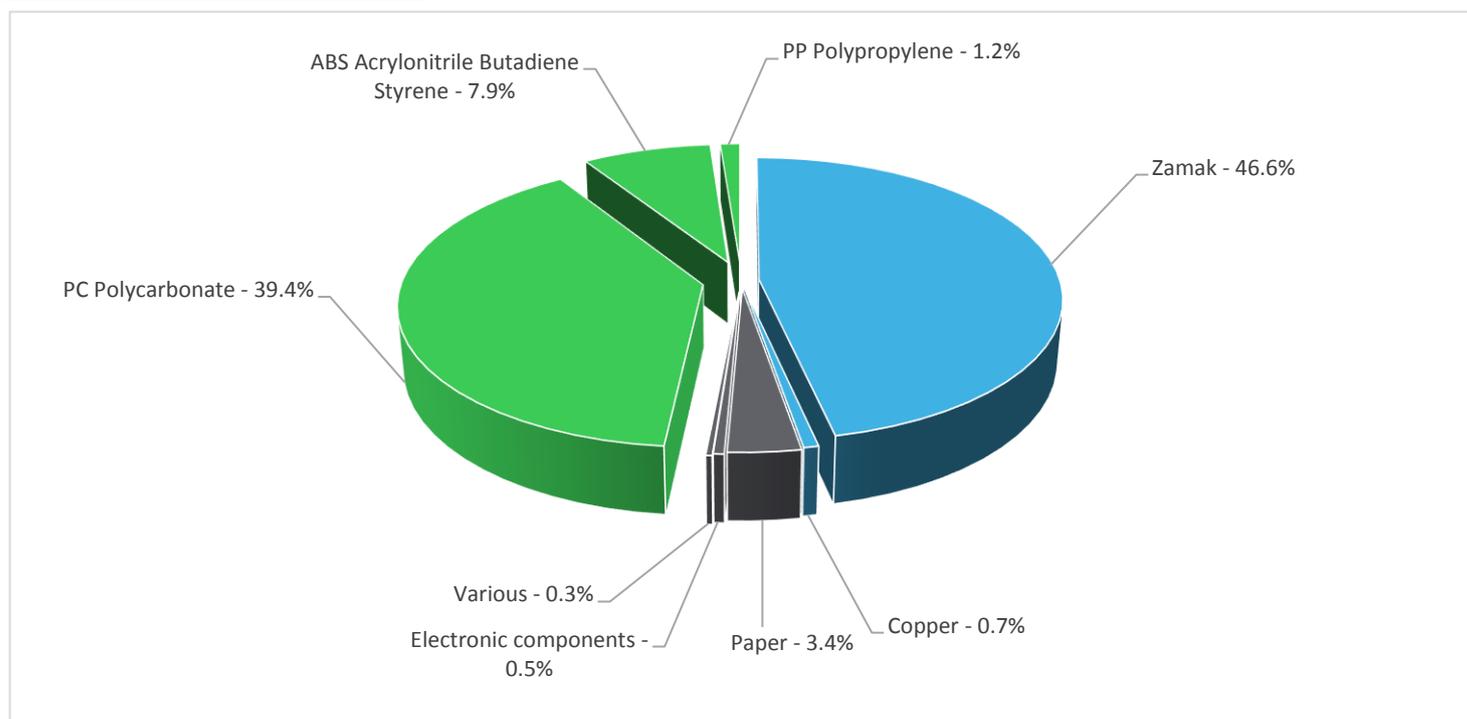

	Plastics	48,5%
	Metals	47,3%
	Others	4,2%



## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



## Additional environmental information

The RJ45 SINGLE CAT5E UTP OUTLET 2 MODULES presents the following relevant environmental aspects


<b>Design</b>	Reuse of existing S1 (infraplus) cat sockets for 5e / 6 / 6a as unshielded, foilshielded and shielded.
<b>Manufacturing</b>	Manufactured at a production site complying with the regulations
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 2.1 g, consisting of PP film (43), paper (57%) Product distribution optimised by setting up local distribution centres
<b>Installation</b>	RJ45 SINGLE CAT5E STP OUTLET 2 MODULES NU341118 does not require any installation operations.
<b>Use</b>	The product does not require special maintenance operations.
<b>End of life</b>	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials  No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process.  Recyclability potential: <b>42%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).



## Environmental impacts

<b>Reference life time</b>	30 years			
<b>Product category</b>	Copper telecom accessory			
<b>Installation elements</b>	No special components needed			
<b>Use scenario</b>	Use rate: 70% of the RLT			
<b>Geographical representativeness</b>	Russia, France, Spain			
<b>Technological representativeness</b>	The main function of the RJ45 SINGLE CAT5 UTP OUTLET 2 MODULES is to create connection and data transmission between RJ45 chord and wall socket for RJ45 which is the product itself.			
<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Energy model used: Spain	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators		RJ45 SINGLE CAT5E UTP OUTLET 2 MODULES - NU341118					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	2,39E-05	2,38E-05	0*	0*	3,19E-08	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	2,73E-03	1,13E-03	4,48E-05	7,09E-07	1,53E-03	2,21E-05
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	1,96E-03	1,85E-03	1,03E-05	1,25E-06	9,24E-05	6,17E-06
Contribution to global warming	kg CO <sub>2</sub> eq	8,86E-01	4,96E-01	9,82E-03	1,12E-03	3,67E-01	1,17E-02
Contribution to ozone layer depletion	kg CFC11 eq	9,88E-08	7,44E-08	1,99E-11	0*	2,39E-08	5,11E-10
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	1,85E-04	9,52E-05	3,20E-06	2,53E-07	8,41E-05	2,30E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m <sup>3</sup>	1,34E+00	1,02E-02	0*	0*	1,33E+00	0*
Total Primary Energy	MJ	1,72E+01	9,65E+00	1,39E-01	0*	7,32E+00	1,07E-01

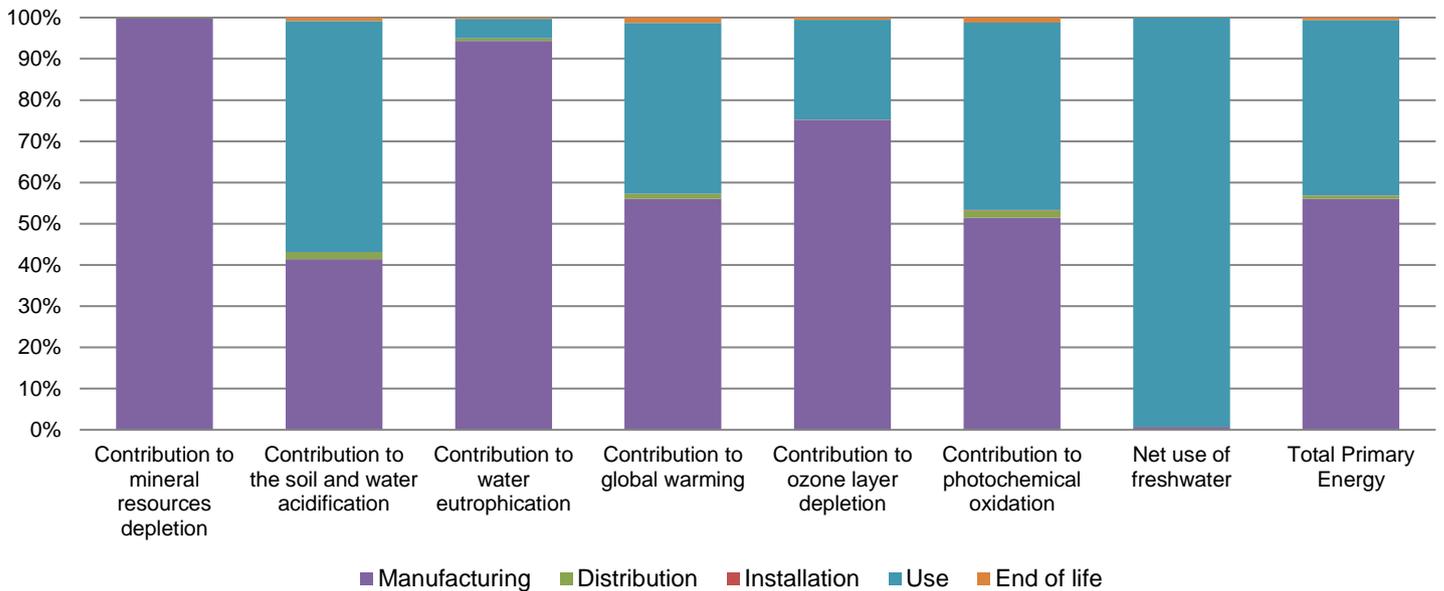

Optional indicators		RJ45 SINGLE CAT5E UTP OUTLET 2 MODULES - NU341118					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	1,26E+01	8,18E+00	1,38E-01	2,28E-03	4,16E+00	9,80E-02
Contribution to air pollution	m³	2,54E+02	2,37E+02	4,18E-01	3,97E-02	1,58E+01	7,77E-01
Contribution to water pollution	m³	1,07E+02	8,97E+01	1,61E+00	1,19E-02	1,51E+01	9,36E-01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	7,81E-04	7,81E-04	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1,06E+00	1,28E-01	1,85E-04	0*	9,31E-01	1,19E-04
Total use of non-renewable primary energy resources	MJ	1,62E+01	9,52E+00	1,39E-01	0*	6,39E+00	1,07E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1,04E+00	1,06E-01	1,85E-04	0*	9,31E-01	1,19E-04
Use of renewable primary energy resources used as raw material	MJ	2,20E-02	2,20E-02	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1,48E+01	8,13E+00	1,39E-01	0*	6,39E+00	1,07E-01
Use of non renewable primary energy resources used as raw material	MJ	1,39E+00	1,39E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	2,10E-01	9,46E-02	0*	0*	1,91E-04	1,16E-01
Non hazardous waste disposed	kg	1,66E+00	2,89E-01	3,49E-04	2,34E-03	1,37E+00	3,28E-04
Radioactive waste disposed	kg	1,11E-03	1,99E-04	2,48E-07	0*	9,13E-04	5,22E-07
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	3,51E-02	4,55E-03	0*	0*	0*	3,06E-02
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	1,80E-03	2,24E-04	0*	0*	0*	1,58E-03
Exported Energy	MJ	2,13E-03	1,44E-03	0*	6,87E-04	0*	0*

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.6.0.1, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-00314-V01.01-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Verifier accreditation N°	VH08	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Date of issue	06/2018	Information and reference documents	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal	External	X	
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)			
PEP are compliant with XP C08-100-1 :2014			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			
			

Schneider Electric Industries SAS  
Country Customer Care Center  
<http://www.schneider-electric.com/contact>  
35, rue Joseph Monier  
CS 30323  
F- 92506 Rueil Malmaison Cedex  
RCS Nanterre 954 503 439  
Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

Published by Schneider Electric

SCHN-00314-V01.01-EN

© 2017 - Schneider Electric – All rights reserved

06/2018