


Suno™
Fan controller

Cat. No(s): 7 21X 40

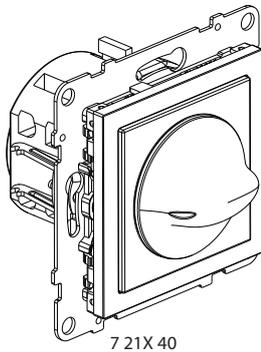

7 21X 40


1. USE

Rotary speed controller for fan.


2. RANGE

Description	White	Ivory	Aluminium	Black
VENTILATION CONTROL SWITCH (0,1,2,3)	7 211 40	7 212 40	7 213 40	7 214 40

3. DISMANTLING

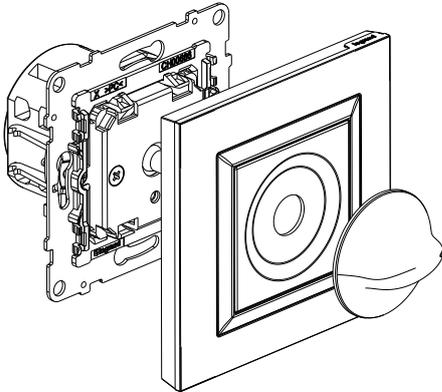

4. DIMENSIONS (mm)

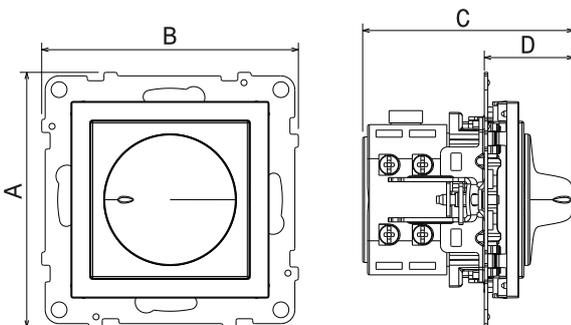

References	A	B	C	D
7 21X 40	72,9	72,9	59,9	25,4

5. CONNECTION


Flexible or rigid cables compatible.


Type of terminals:
 Screw terminal

Terminal capacity:
 2 x 2.5mm²/terminal

Stripping length:
 8mm

■ 5.1 Wiring

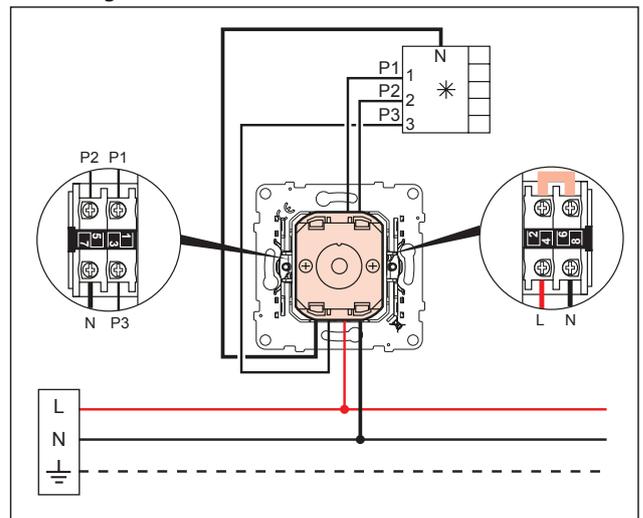

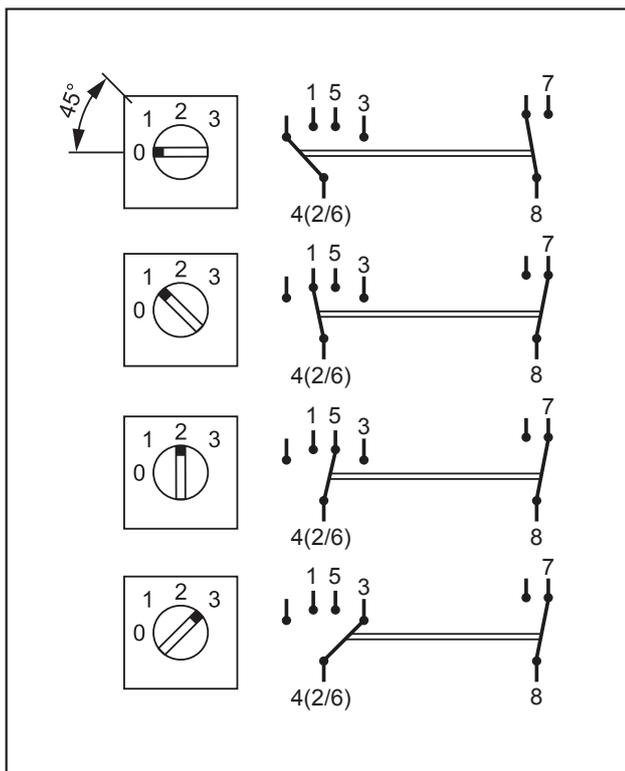

6. TECHNICAL CHARACTERISTICS

■ 6.1 Mechanical characteristics

Protection against solid bodies and liquids: IP20
Protection against impact: IK04

■ 6.2 Material characteristics

Polygloss appearance

Colour molded:

- White RAL 9003
- Ivory RAL 1013

Matt colour painted:

- Aluminum RAL 9023
- Black RAL 9017

Material:

- Plate ABS
- Socket covers: Polycarbonate
- Halogen-free
- UV resistant

Self-extinguishing:

850°C/30 s for installing components holding live parts in place
650°C/30 s for other insulating components

■ 6.3 Electrical characteristics


Voltage: 250 V~
Current: AC23A 2,5kW
AC21A 20 A
Frequency: 50/60 Hz

■ 6.4 climatic characteristics

Usage temperature: -5°C to +35°C
Storage temperature: -10°C to +70°C

■ 6.5 Support


Material of support: -Metal
Angular adjusting:



■ 6.6 Fixing with claws

Number of turns to open the claws:

- 58 mm > 2,1 turns
- 65 mm > 2,75 turns

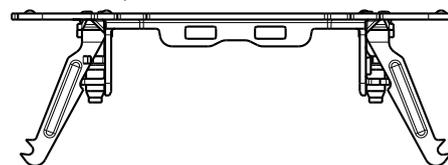

Performance of double teeth claws: extraction resistance:

7. MAINTENANCE

Surface cleaning with a cloth.

Do not use:

Acetone, tar remover, trichloroethylene.

Maintenance with the following products:

Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%, Window-cleaning products.

Caution: Always test before using other special cleaning products.

8. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.
Refer to e. catalogue.