



# 10" panel with cassettes to be equipped with RJ45 connectors

Cat. No(s): 0 337 98/99

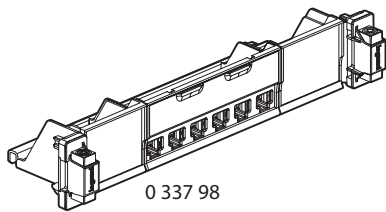

0 337 98

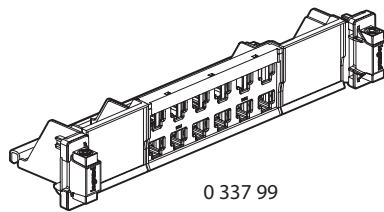

0 337 99

## CONTENTS

## Page

1. GENERAL CHARACTERISTICS .....	1
2. POSITIONING .....	1
3. TECHNICAL CHARACTERISTICS .....	2
4. DIMENSIONS .....	2
5. ACCESSORIES .....	2

### 1. GENERAL CHARACTERISTICS

Equipped with new-generation Soluclips for automatic (screwless) fixing on rack and cabinet uprights.

Universal mounting in all racks or cabinets with automatic earthing on unpainted panels. Painted panels can be connected to earth with a cord and a screw connection.

Equipped with a Cat. 5e to 6A RJ 45 cassettes (6 or 12 ports).

Equipped with a Cat. 8 RJ 45 cassettes (6 ports only).


To be equipped with RJ45 Cat. 5e, Cat. 6, Cat. 6A or Cat. 8 connectors.

Supplied with different colour identification labels for each cassette (blue, white, yellow, orange for 6 ports and white for 12 ports).

10" panel - 1 U.

Each connector can be removed individually.

### Mounting a panel

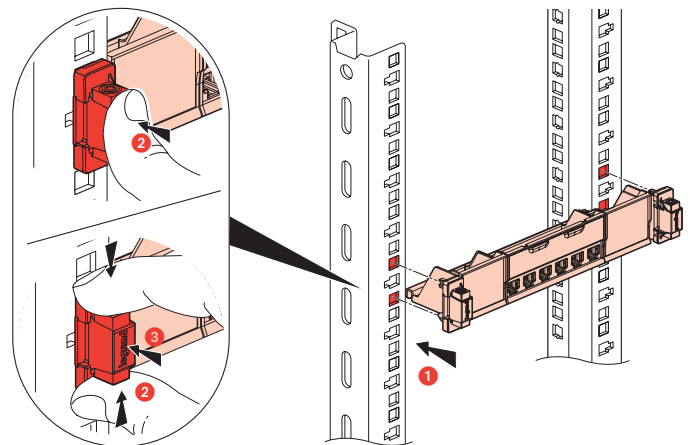

Description	Cat. No.	Number of ports	Weight (g)
Panel to be equipped with 6 connectors	0 337 98	6	340
Panel to be equipped with 12 connectors	0 337 99	12	338

### 2. POSITIONING

Connectors are connected at the front without a special tool.

- Individual connectors simply clip onto the panel

### 3. TECHNICAL CHARACTERISTICS

#### 3.1 Materials


Panel: DC01 galvanised sheet steel  
 Cassette: Polycarbonate, ABS, PA 6/6, stainless steel, tinned brass, nickel silver

#### 3.2 Climatic characteristics

Operating temperatures: -10°C to +65°C  
 Temperature of storage : -25°C to +70°C

### 4. DIMENSIONS

Dimensions of panels 0 337 90/93

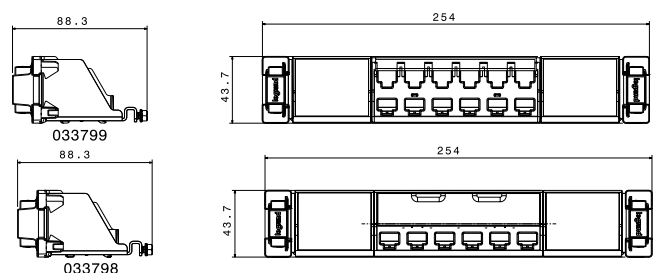

---

**5. ACCESSORIES**

- **0 337 57:** Port blanking plate

Blanking plate with 6 separable ports

Used to block up individually, partially or fully 1 to 6 ports (cassette with 6 ports) or 1 to 12 ports (HD cassette).