
Product End of Life Instructions

SPACELOGIC KNX DALI GATEWAY PRO





End of Life Instructions

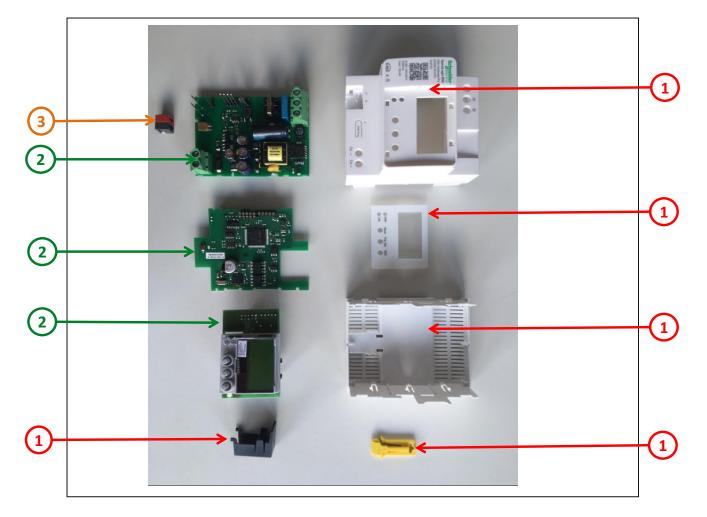

| Recommendation | Number on drawing | Component / Material | Weight (in g) | Comment |
|------------------|----------------------|--|------------------|-----------|
| To be dismantled | 1 | UPPER PART / PC | 38.2 | |
| To be dismantled | 1 | BASE PART / PC | 22.2 | |
| To be dismantled | 1 | DISPLAY WINDOW / PC | 4.2 | Shredding |
| To be dismantled | 1 | LOCKING CLIP / PC | 1.3 | Shredding |
| To be dismantled | 1 | BUS CAP / PC | 1.9 | Shredding |
| To be depolluted | 2 | Electronic Board (Power) > 10cm ² | 19 | |
| To be depolluted | 2 | Electronic Board (Power) > 10cm ² | 22 | |
| To be depolluted | 2 | Electronic Board (Power) > 10cm ² | 77 | |
| To be depolluted | 3 | Connector | 1.6 | |

Product description

ſ

| Manufacturer identification | Schneider Electric Industries SAS | |
|---------------------------------------|---|--|
| Brand name | Schneider Electric | |
| Product function | The main fuction of SpaceLogic KNX DALI Gateway Pro is a multi-master application controller for controlling electronic ballasts with DALI interface via the KNX installation bus. | |
| Product reference | MTN6725-0101 | |
| Additional similar product references | MTN6725-0101 | |
| Total representative product mass | 173 g | |
| Representative product dimensions | 72 x 65 x 90 | |
| Accessories | KNX bus connecting terminal and shrink tube. | |
| Date of information release 10/2020 | | |

Additional information

| Legal information | This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product. | | |
|-------------------------|--|--|--|
| Recyclability potential | 11% | Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 2 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME). | |

Schneider Electric Industries SAS

Country Customer Care Center http://www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com

ENVEOLI2009003_V1

Published by Schneider Electric © 2019 - Schneider Electric – All rights reserved

10/2020