# Product End of Life Instructions


### **SmartX Controller Terminal Base TB-IO-W1**







#### End of Life Instructions

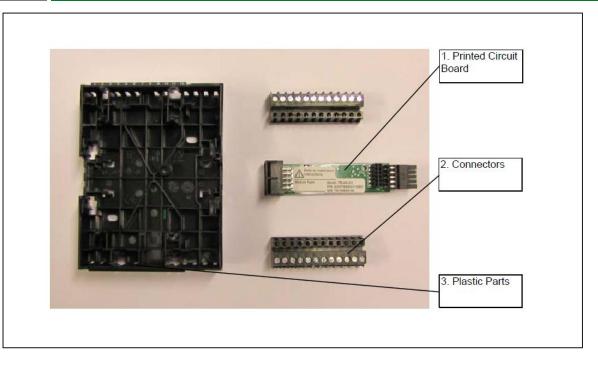

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Electronic Board (Communication) > 10cm <sup>2</sup>	14	
To be dismantled	2	Connectors	46	
To be dismantled	3	Plastic parts	62	ABS-PC

## Product description

Manufacturer identification	Schneider Electric Industries SAS	
Brand name	Schneider Electric	
Product function	The main purpose of the SmartX Controller Terminal Base is to allow the site to be wired prior to installation of the electronics. It also includes an auto-addressing feature which eliminates the need for setting DIP switches or pressing commission buttons. With the SmartX Controller family, each module automatically knows its order in the chain and assigns itself accordingly - significantly reducing engineering and maintenance time. Because critical applications require 24-hour operation, Schneider Electric designed the SmartX Controller and its family of I/O modules for hot-connection of terminal bases and hot swapping of servers and modules to their bases. This design ensures continuous power and communication during service operations.	
Product reference	SXWTBIOW110001	
Additional similar product references	SXWTBIOW110001	
Total representative product mass	122.2 g	
Representative product dimensions	114 x 90 x 42	
Accessories	0	
Date of information release	10/2016	

## (1) Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.		
In case of special transportation: transportation method	0		
Recyclability potential	yclability potential Based on "ECO'DEEE recyclability and recoverability calculation method" (version N Sep. 2008 presented to the French Agency for Environment and Energy Manageme ADEME).		

Schneider Electric Industries SAS

Customer Care Center

www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com

ENVEOLI1609008\_V1

Published by Schneider Electric

© 2016 - Schneider Electric – All rights reserved

10/2016