
# **Product Environmental Profile**

#### **XAP Control Station Box**






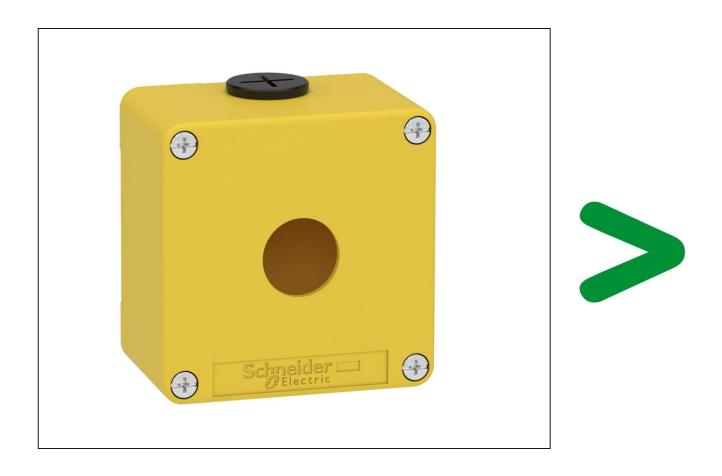

### **General information**

Representative product	XAP Control Station Box - XAPK1201
Description of the product	This metal enclosure is proposed to meet various applications where robustness is a top priority and can be used with both XB4 and XB5 range
Functional unit	The main function of XAP control station box is to provide complete water tight connection for XB4 and XB5 range products during 20 years with the following dimension is 80mm x 80mm x 51mm with EN/IEC 60529 standard.

### Constituent materials

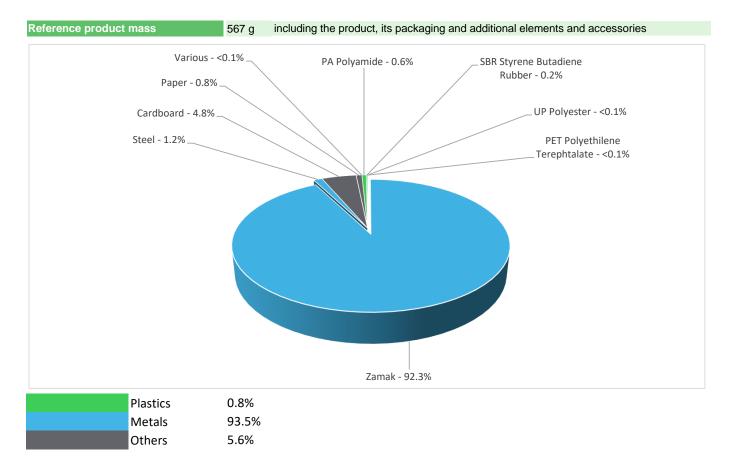

## **Substance assessment**

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate – BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page




	The XAP Control Station Box presents the following relevent environmental aspects						
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified						
	Weight and volume of the packaging optimized, based on the European Union's packaging directive						
Distribution	Packaging weight is 31.8 g, consisting of Cardboard(86.31%),Paper(13.69%)						
	Product distribution optimised by setting up local distribution centres						
Installation	Product doesn't require special installation						
Use	The product does not require special maintenance operations.						
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials						
	No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process.						
	Recyclability potential:  8						

# **Environmental impacts**

Reference life time	20 years						
Product category	Unequipped enclosures and cabinets						
Installation elements	No special components needed						
Use scenario	Non applicable for unequipped enclosures and cabinets						
Geographical representativeness	Product used in all regions						
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are similar and representative of the actual type of technologies used to make the product in production)						
Energy model used	Manufacturing	Installation	Use	End of life			
	Energy model used: France	Electricity mix; AC; consumption mix, at consumer; 120V; US	Electricity mix; AC; consumption mix, at consumer; 120V; US	Electricity mix; AC; consumption mix, at consumer; 120V; US			

Compulsory indicators	XAP Control Station Box - XAPK1201						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	3.13E-04	3.13E-04	0*	0*	0*	0*
Contribution to the soil and water acidification	$kg SO_2 eq$	8.84E-03	8.35E-03	3.34E-04	7.17E-06	0*	1.56E-04
Contribution to water eutrophication	kg PO <sub>4</sub> 3- eq	2.29E-03	2.17E-03	7.69E-05	1.74E-06	0*	3.68E-05
Contribution to global warming	kg CO <sub>2</sub> eq	4.22E+00	4.09E+00	7.32E-02	1.72E-03	0*	5.10E-02
Contribution to ozone layer depletion	kg CFC11 eq	8.22E-07	8.19E-07	1.48E-10	0*	0*	3.45E-09
Contribution to photochemical oxidation	kg C₂H₄ eq	5.61E-04	5.19E-04	2.38E-05	5.36E-07	0*	1.67E-05
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	5.99E-02	5.98E-02	6.55E-06	0*	0*	6.16E-05
Total Primary Energy	MJ	7.21E+01	7.02E+01	1.03E+00	2.25E-02	0*	7.80E-01

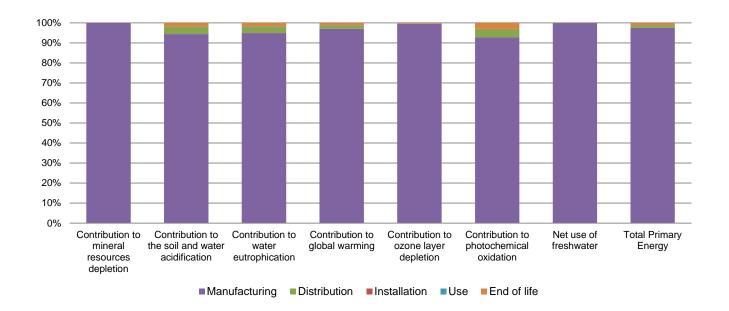

Optional indicators	XAP Control Station Box - XAPK1201						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	5.38E+01	5.21E+01	1.03E+00	2.23E-02	0*	6.27E-01
Contribution to air pollution	m³	3.20E+03	3.19E+03	3.11E+00	0*	0*	5.52E+00
Contribution to water pollution	m³	3.29E+02	3.11E+02	1.20E+01	2.61E-01	0*	5.92E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	2.59E-02	2.59E-02	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	3.22E-01	3.20E-01	1.38E-03	3.49E-05	0*	8.71E-04
Total use of non-renewable primary energy resources	MJ	7.18E+01	6.99E+01	1.03E+00	2.24E-02	0*	7.80E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.67E-01	1.64E-01	1.38E-03	3.49E-05	0*	8.71E-04
Use of renewable primary energy resources used as raw material	MJ	1.55E-01	1.55E-01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	7.16E+01	6.98E+01	1.03E+00	2.24E-02	0*	7.80E-01
Use of non renewable primary energy resources used as raw material	MJ	1.55E-01	1.55E-01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1.56E+00	8.59E-01	0*	0*	0*	7.00E-01
Non hazardous waste disposed	kg	3.99E-01	3.93E-01	2.60E-03	2.35E-04	0*	2.40E-03
Radioactive waste disposed	kg	1.35E-04	1.29E-04	1.85E-06	4.60E-08	0*	3.74E-06
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	4.60E-01	5.60E-02	0*	3.16E-02	0*	3.73E-01
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	2.61E-04	0*	0*	0*	0*	2.61E-04
Exported Energy	MJ	2.59E-03	2.50E-03	0*	9.10E-05	0*	0*

<sup>\*</sup> represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.9.1, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number ENVPEP2111017\_V1-EN Drafting rules PCR-ed3-EN-2015 04 02

Date of issue 12/2021 Supplemented by PSR-0005-ed2-EN-2016 03 29

Validity period 5 years Information and reference documents www.pep-ecopassport.org

Independent verification of the declaration and data

Internal X External

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »

Schneider Electric Industries SAS
Country Customer Care Center
http://www.schneider-electric.com/contact
35, rue Joseph Monier
CS 30323

F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

ENVPEP2111017\_V1-EN © 2019 - Schneider Electric – All rights reserved

12/2021