

# Product End-of-Life Instructions


## Cables/Harnesses (Zero halogen type)

### Product Range

Cables/Harnesses (Zero halogen type)

### Marketing Model

TSXCANCADD03

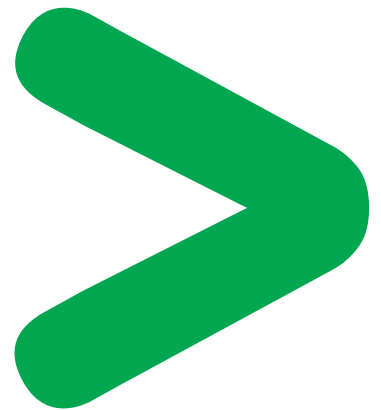

### Size in mm:

H x L: 7 x 1000

### Weight in kg (or g):

Between 60 and 500g




## Operations recommended for the end of life treatment

There are several steps to process the products at the end of life so as to recover components, materials or energy:

**Reuse** ⇒ **Separation for special treatment** ⇒ **Other dismantling** ⇒ **Shredding**

The components of the products that optimize the recycling performances are listed, identified and located hereunder.

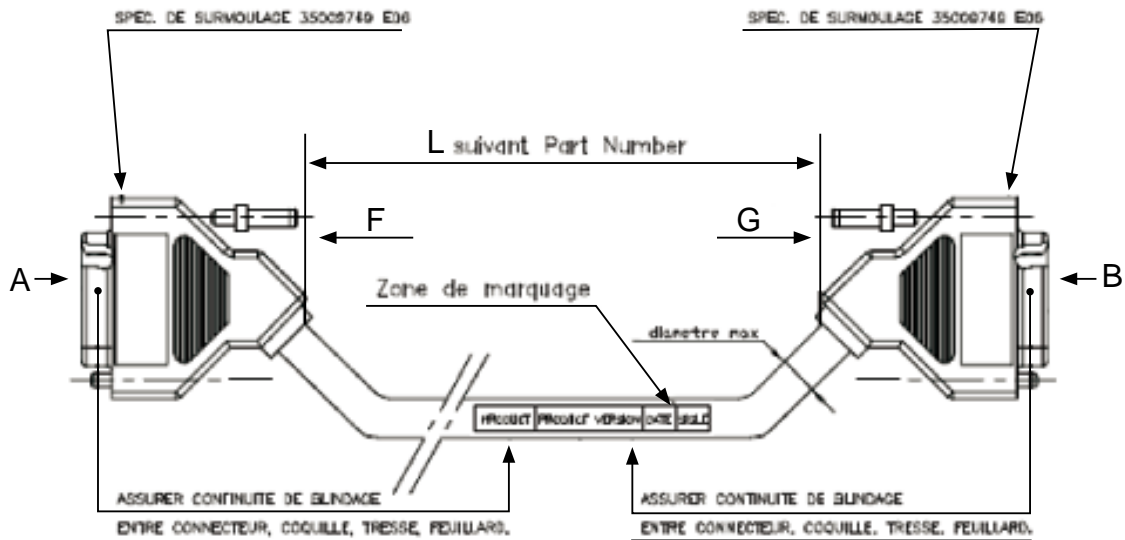

Recommendation	Number on drawing	Components	Weight (g)	Comment
Special treatment	-	Cables / Harnesses	75g/m	Halogen Free
Other dismantling	-	Copper	35 g/m	(Valorisation)

### Schneider Electric Industries SAS

35, rue Joseph Monier  
CS30323  
F - 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439  
Capital social 896 313 776 €  
www.schneider-electric.com

The version of the Guide used to create the document: End of Life Instruction Drafting Guide of Schneider Electric version V0.

Publication: Schneider Electric