## Product End of Life Instructions

Motor circuit breaker, TeSys Deca, rotary handle


**TeSys Deca Motor circuit breaker** 







## End of Life Instructions

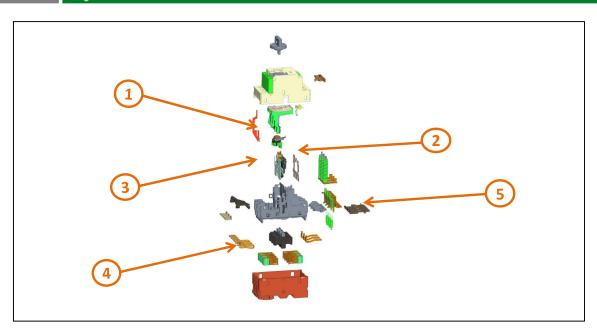

| Recommendation   | Number on drawing | Component / Material  | Weight (in g) | Comment |
|------------------|-------------------|---|---------------|---------|
| To be depolluted | 2,3,5             | PC, ABS-PC, PA, PA6, HDPE, SAN with brominates flame retardants | 3.4           |         |
| To be depolluted | 1,4               | Other plastic parts with brominates flame retardants            | 28.86         |         |

## **Product description**

| Manufacturer identification           | Schneider Electric Industries SAS   |  |
|---------------------------------------|---|--|
| Brand name                            | Schneider Electric  |  |
| Product function                      | The main purpose of the product is to protect three-phase motors, the cables, the people, again short circuits and overloads.               |  |
| Product reference                     | GV2P22  |  |
| Additional similar product references | Motor circuit-breaker, Magnetic circuit-breaker :GV2L, GV2P /01 to 32 Motor circuit-breaker, Magnetic circuit-breaker : GV2-PMxxC /01 to 32 |  |
| Total representative product mass     | 313 g   |  |
| Representative product dimensions     | 89mm x 45mm x 97mm  |  |
| Accessories                           | No  |  |
| Date of information release           | 2023/08/02  |  |

## **Additional information**

| Legal information   | This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product. |  |  |
|---|--|--|--|
| In case of special transportation:<br>transportation method | No   |  |  |
| Recyclability potential                                     | 51%  | Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO' DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability). |  |

Schneider Electric Industries SAS

Country Customer Care Center
http://www.schneider-electric.com/contact
35, rue Joseph Monier

CS 30323

F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.se.com

ENVEOLI2211002\_V2

Published by Schneider Electric

© 2023 - Schneider Electric – All rights reserved

2023/08/02