




Power **5 W**  
Luminous flux\* **650 lm (360°)**  
Light colour **Neutral white**  
IK **6**

Voltage **230 V**  
Colour temperature **4000 K**  
Beam angle **110 °**  
Protection class **IP54**

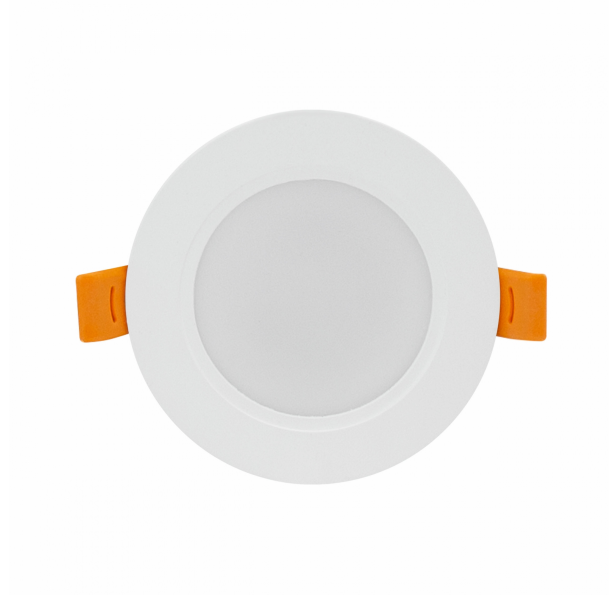

See more on dedicated page 



 Declaration of Conformity





 Photometric file



 3D model

#### Technical data:

|                              |                |
|------------------------------|----------------|
| Product code                 | SLI043021NW_PW |
| Power                        | 5 W            |
| Nominal current              | 36 mA          |
| Voltage                      | 230 V          |
| Energy consumption           | 5 kWh/1000h    |
| Frequency                    | 50HZ Hz        |
| Protection class             | II             |
| Power factor                 | 0.6            |
| Useful luminous flux*        | 650 lm (360°)  |
| Luminous flux**              | 500 lm (360°)  |
| Light efficiency             | 130 lm/W       |
| Colour temperature           | 4000 K         |
| Light colour                 | Neutral white  |
| Beam angle                   | 110 °          |
| RA                           | 80             |
| Uniformity of color SDCM max | 5              |
| Dimmable                     | No             |
| Working temperature range    | -20/+40 °      |
| Lifespan                     | 17000 h        |
| Housing material             | PC+PS          |
| IK                           | 6              |
| Protection class             | IP54           |
| Colour                       | White          |
| Dimension (axbxc)            | 95x31 mm       |
| Mounting hole                | 72 mm          |
| Weight                       | 0.062 kg       |
| For use                      | Inside         |
| Assembly method              | Recessed       |
| Application                  | INT            |
| Made in                      | PRC            |



\*Applies to the LED source used, \*\*Luminaire luminous flux