


## PRODUCT INFORMATION SHEET

### Fuel injection pressure tester

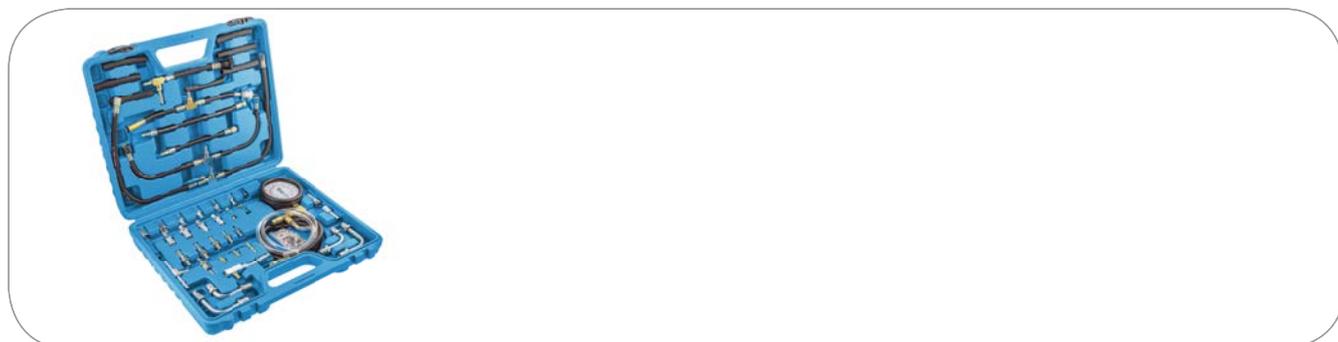

#### Product description

Tester for diagnosis of fuel injection pressure in gasoline engines. A professional set consisting of a pressure gauge with a hose and a set of elements. Clear scales of the manometers facilitates reading the measurement result. The indicator is made of damage-resistant yet lightweight materials. In addition, the indicator glass is covered with a rubber shock-absorbing cover. Mainly used in automotive workshops.

#### Characteristics

- for use in injection systems in petrol engines;
- a manometer;
- maximum pressure 10 BAR / 140 PSI;
- flexible rubber hoses with quick couplers to reach even hard-to-reach places;;
- a set of tips available in the set allow for use in injection systems in a wide range of vehicles;
- packed in a plastic case for easy handling and storage of individual elements.

#### Contains:

- 1/4" plug
- 1/4" 7 mm connector – 2 pcs.
- 1/4" 8 mm connector – 2 pcs.
- A manometer connected to the M8 x 1 complex tee and an 8 mm pipe connector with a flow-through ball valve
- Clamp band - 4 pcs.
- 8 mm elastic hose, length 50 mm
- 7 mm elastic hose, length 50 mm
- FORD spring clip adapter with 10 x 1.25 valve
- 1/4" tee, female, with valve 10 x 1.25
- Tee 15 mm x 1.5 female for GM with valve 10 x 1.25
- Adapter with two quick couplings for GM with 10 x 1.25 valve
- Adapter with quick coupler and female connection 15 mm x 1.5 for GM with 10 x 1.25 valve
- Adapter with 10 x 1.25 FORD valve
- 6 mm elastic hose, length 1450 mm FORD
- Flexible hose with a valve 10 x 1.25, length 350 mm
- Flexible hose with connector 10 x 1.25 female and 10 x 1 male for BOSCH C.I.S., length 650 mm
- Base tee with hoses with a total length of 1600 mm with a flow ball valve and a drain valve with a 1/4 "thread and two 12 x 1.5 female connections.
- Adapter for ring couplings 8 x 1 male with valve 10 x 1.25
- Adapter for ring couplings 10 x 1 male with valve 10 x 1.25
- Adapter for ring couplings 12 x 1.25 male with valve 10 x 1.25
- Adapter for ring couplings 12 x 1.5 male with valve 10 x 1.25
- Adapter 6 x 1 with 10 x 1.25 Honda valve
- Reduction 12 x 1.5 male x 10 x 1 male
- Reduction 12 x 1.5 male x 10 x 1 female
- Reduction 12 x 1.5 male x 8 x 1 female
- Reduction 12 x 1.5 male x 8 x 1 male - pcs.
- Reduction 12 x 1.5 male x 8 x 1 male, length 75 mm
- Reduction 12 x 1.5 male x 5/8" x 1.5 male
- Muff 5/8" x 1.5 female
- Reduction 12 x 1.5 male x 16 x 1.5 male (Ford Scorpio and other)
- Muff 16 x 1.5 female (Ford Scorpio and other)
- Muff 14 x 1.5 female
- Nipple 12 x 1.5 male x 14 x 1.5 male
- Muff 1/4" female
- Nipple 12 x 1.5 male x 1/4" male
- Multifunctional connector 6 mm - 10 mm x 12 x 1.5 male

#### Technical specifications

HÖGERT		INFO		
HT8G415	5902801361999	10 BAR / 140 PSI	1	5

140 PSI/  
10 BAR

petrol/  
benzynowe

07.2021

Hөгert Technik GmbH, Pariser Platz 6a,  
10117 Berlin, Deutschland

Producent/ Manufacturer/ Hersteller/

Произведено для:

PL GTV Poland sp. z o.o. sp.k., ul. Przejazdowa 21  
05-800 Pruszków, Polska/ Poland/ Polen/ Польша

Importer/ Импортёр:

Организация уполномоченная принимать претензии по качеству товара:

RU ООО «ГТВ РУС» 140073 Московская область, Люберецкий район, Поселок Томилино Микрорайон «Трицефабрика», Лит. 7А; info@hoegert.ru.

HR GTV Croatia d.o.o.; Kovinska 4s, 10000 Zagreb, Hrvatska

Distributor:

ES GTV España Herrajes, E Iluminación, S.L.,

Avenida Aragón 308, 46021 Valencia, Spain

CZ GTV Czech Distribution s.r.o., CTPark Ostrava,

Na Rovince 879, 720 00 Ostrava Hrabová

BR GTV Brasil Comércio, Importação e Exportação EIRELI

Rua William Booth 500 - Boqueirão

Curitiba - Paraná, CEP: 81650-120, Brasil