


item number	width of cable tray (mm)	height of cable tray (mm)	B (mm)	C (mm)	thickness of metal sheet (mm)
T 60X50_S	50	60	250	450	0,8
T 60X75_S	75	60	275	475	0,8
T 60X100_S	100	60	300	500	0,8
T 60X150_S	150	60	350	550	0,8
T 60X200_S	200	60	400	600	1,0
T 60X300_S	300	60	500	700	1,0
T 60X400_S	400	60	600	800	1,0
T 60X500_S	500	60	700	900	1,0
T 60X600_S	600	60	800	1000	1,2
T 60X50_F	50	60	250	450	0,8
T 60X75_F	75	60	275	475	0,8
T 60X100_F	100	60	300	500	0,8
T 60X150_F	150	60	350	550	0,8
T 60X200_F	200	60	400	600	1,0
T 60X300_F	300	60	500	700	1,0
T 60X400_F	400	60	600	800	1,0
T 60X500_F	500	60	700	900	1,0
T 60X600_F	600	60	800	1000	1,2

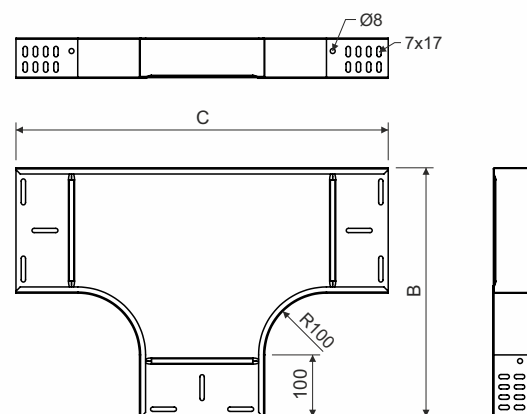

product description: The T-piece is used to branch off JUPITER cable trays or cable ladders of the same width.

Use the bolt NSM 6X10 for connection. The bolt head should be inside the cable tray to protect the cables.

A bolt with a GMT surface finish is used for a tray with an F surface finish.

surface finish:
 S - Pre-Galvanized, zinc-layer 15 - 27 µm
 F - Hot Dip Galvanized, zinc-layer 50 - 100 µm
 EO - epoxy paint for indoor environment - paint over the perimeter - 60 µm
 EC - epoxy paint for indoor environment - total paint - 60 µm

sales amount: á 1 pc

meets the requirements: EN 61537:02

classification: ČSN 73 0895 P 90-R
 DIN 4102-12 E 90
 STN 92 0205 PS 90

Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

storage: EN 60721-3-1

