


## horizontal branch

item number	for width of cable tray	for height of cable tray	B	thickness of metal sheet
<b>OH 35X50</b>	50	35	450	0,8
<b>OH 35X75</b>	75	35	475	0,8
<b>OH 35X100</b>	100	35	500	0,8
<b>OH 35X150</b>	150	35	550	0,8
<b>OH 35X200</b>	200	35	600	1,0
<b>OH 35X300</b>	300	35	700	1,0
<b>OH 35X400</b>	400	35	800	1,0
<b>OH 35X500</b>	500	35	900	1,0
<b>OH 35X600</b>	600	35	1000	1,0
<b>OH 60X50</b>	50	60	450	0,8
<b>OH 60X75</b>	75	60	475	0,8
<b>OH 60X100</b>	100	60	500	0,8
<b>OH 60X150</b>	150	60	550	0,8
<b>OH 60X200</b>	200	60	600	1,0
<b>OH 60X300</b>	300	60	700	1,0
<b>OH 60X400</b>	400	60	800	1,0
<b>OH 60X500</b>	500	60	900	1,0
<b>OH 60X600</b>	600	60	1000	1,2
<b>OH 85X100</b>	100	85	500	0,8
<b>OH 85X150</b>	150	85	550	0,8
<b>OH 85X200</b>	200	85	600	1,0
<b>OH 85X300</b>	300	85	700	1,0
<b>OH 85X400</b>	400	85	800	1,0
<b>OH 85X500</b>	500	85	900	1,0
<b>OH 85X600</b>	600	85	1000	1,2
<b>OH 110X150</b>	150	110	550	0,8
<b>OH 110X200</b>	200	110	600	1,0
<b>OH 110X300</b>	300	110	700	1,0
<b>OH 110X400</b>	400	110	800	1,0
<b>OH 110X500</b>	500	110	900	1,0
<b>OH 110X600</b>	600	110	1000	1,2

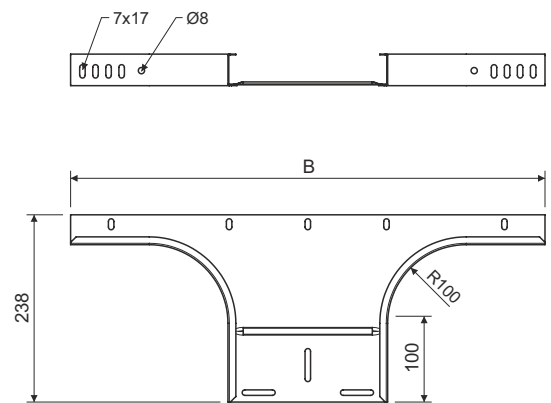

**product description:** This branch is used to provide an additional branch from cable trays running through JUPITER cable trays or cable ladders of the same width.

To fix the connection use the bolt NSM 6X10. To protect the cables, the bolt head is inside the cable tray.

A bolt with a GMT surface finish is used for a tray with an F surface finish.

The branch may be supplied in polyester varnish (varnish layer 60, 100 µm).

**configuration:** S - Pre-Galvanized, zinc-layer 15 - 27 µm  
 F - Hot Dip Galvanized, zinc-layer 50 - 100 µm  
 EO - epoxy coating for indoor environment, along the perimeter, 60 µm  
 EC - epoxy coating for indoor environment, - total paint, 60 µm

**sales amount:** á 1 pc

**certification:** EN 61537:02

**storage:** EN 60721-3-1

