
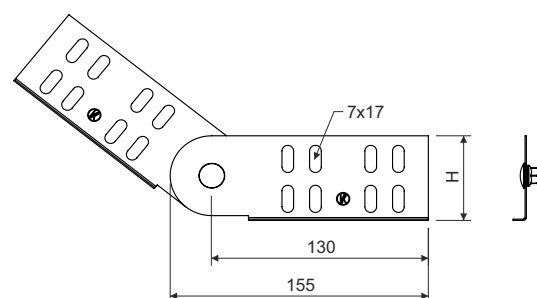


item number	height (H)	thickness of metal sheet
SK 35_S	28	0,8
SK 35_GMT		1,0
SK 50_S	43	0,8
SK 50_GMT		1,0
SK 60_S	53	0,8
SK 60_GMT		1,0
SK 85_S	78	1,2
SK 85_GMT		1,2
SK 100_S	93	1,2
SK 100_GMT		1,2
SK 110_S	103	1,2
SK 110_GMT		1,2

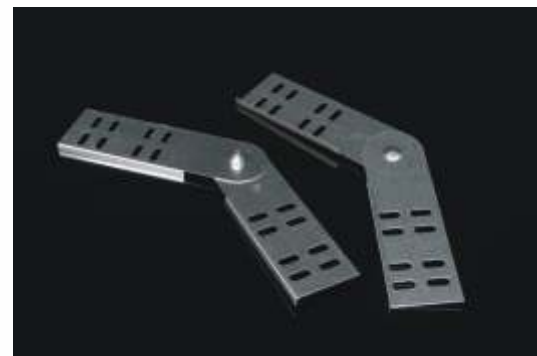

product description: The hinged joint is used to create bends of any angle in cable trays running through JUPITER cable trays or cable ladders.

The coupling is supplied by 1 piece; must be used 2 pieces for installation. The couplings to be used on the right or left side do not differ.

To fix the connection use the bolt NSM 6X10. To protect the cables, the bolt head is inside the cable tray.

Join and bolt with a GMT surface finish is used for a tray with an F surface finish.

These items can also be ordered in a varnished version.

configuration: S - Pre-Galvanized, zinc-layer 15 - 27 µm
 GMT - non electrolytic plating, aluminum-zinc-layer 5-15 µm (equivalent Hot Dip Galvanized)

sales amount: á 1 pc

certification: EN 61537:02

storage: EN 60721-3-1

