


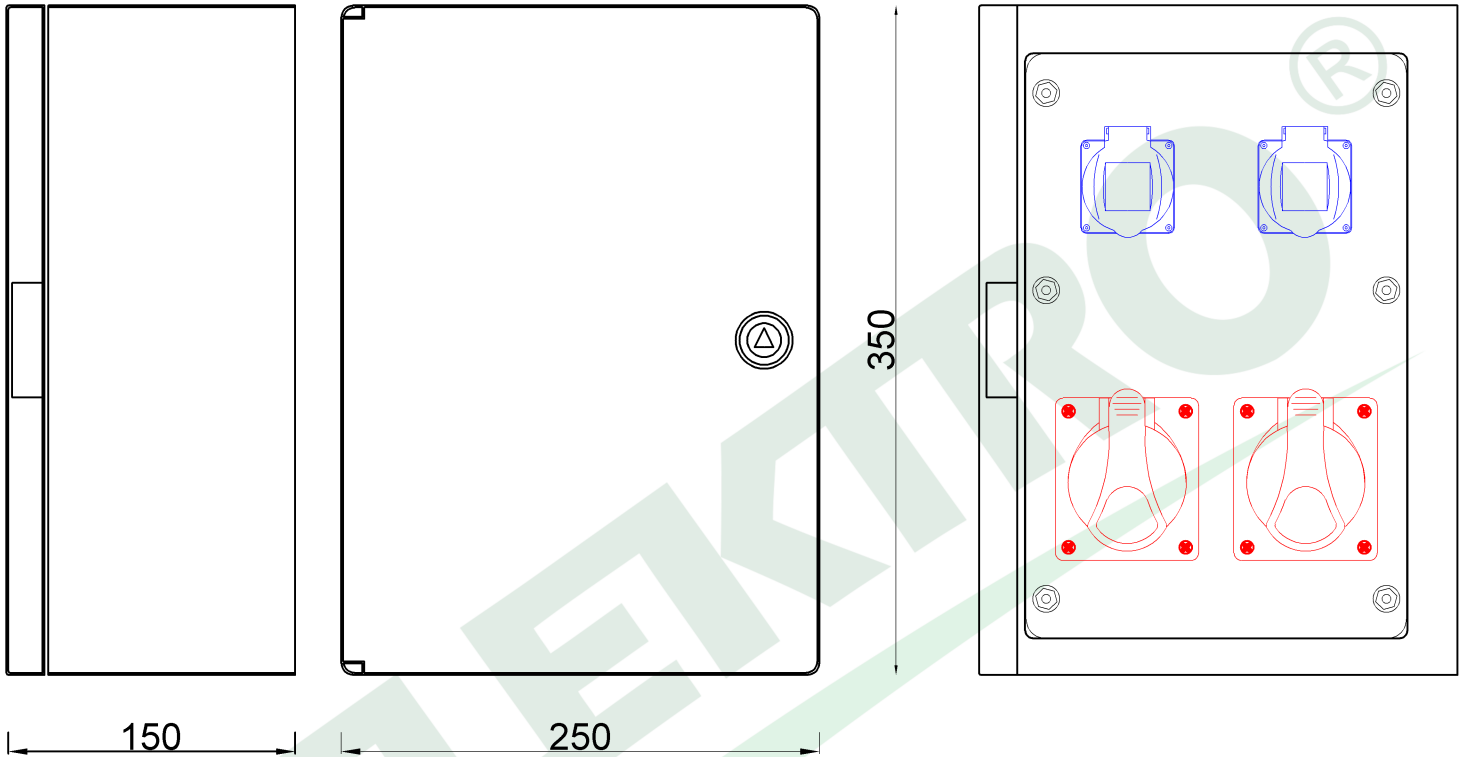

PARAMETRY PARAMETERS	
szafa box	IP65
gniazda sockets	IP44
listwa zaciskowa terminal	10 mm ²
dławica cable gland	PG16
OKABLOWANIE Sockets wiring	
16A/5p	2.5mm ² H07V-K /LgY/ 450/750V
230V	1.5mm ² H07V-K /LgY/ 450/750V

F3.0148	Roz. RB-250 2x16/5, 2x230V Distribution box RB-250 2x16/5, 2x230V
F-ELEKTRO www.f-elektro.com, e-mail: info@f-elektro.com	