


Protective metal conduit liquid-tight

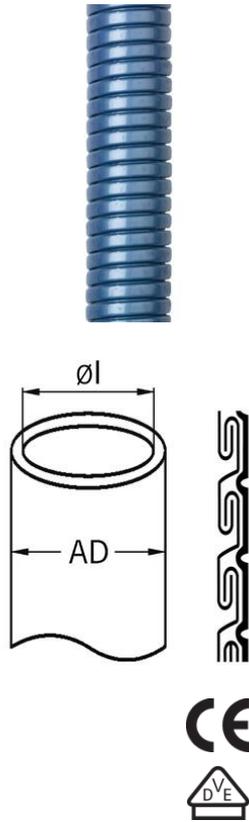

Protective metal conduit liquid-tight

- Protective metal conduit liquid-tight
- FLEXAgraff®-PU-AS
- Metallic blue

| | |
|------------------------|---|
| Order number: | 2130.101.017 |
| EAN: | 7611614209128 |
| Material | Steel galvanized, double-overlapped |
| Sheathing | Polyurethane |
| Properties | High tensile and twisting strength thanks to double-overlapped profile (Agraff), high EMC shielding factor, outstanding performance at low temperatures, no untwisting of the conduit, resistant to oil, petrol and grease, very flexible, flameresistant V2 ac |
| Application | Machine and plant constructions, vehicle construction, rail vehicles outside applications, shipbuilding, automation, electrical installations |
| Tested acc. to | EN / IEC 61386-23 |
| Protection class | IP 68 |
| Operation temperature | -50°C / +100°C / ^ +130°C |
| Outer diameter | 21 mm |
| Inner diameter | 17 mm |
| Bending radius static | 75 mm |
| Bending radius dynamic | 190 mm |
| Bushing | 5031.028.016 |
| Dispatch | 50 |

Colour black on request