


## Protective metal conduit liquid-tight

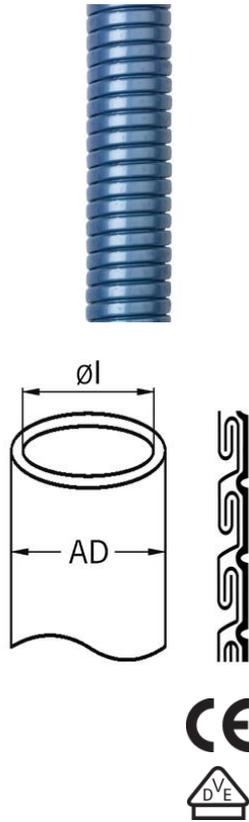

### Protective metal conduit liquid-tight

- Protective metal conduit liquid-tight
- FLEXAgraff®-PU-AS
- Metallic blue

|                        |   |
|------------------------|---|
| <b>Order number:</b>   | <b>2130.101.023</b>   |
| EAN:                   | 7611614207902   |
| Material               | Steel galvanized, double-overlapped   |
| Sheathing              | Polyurethane  |
| Properties             | High tensile and twisting strength thanks to double-overlapped profile (Agraff), high EMC shielding factor, outstanding performance at low temperatures, no untwisting of the conduit, resistant to oil, petrol and grease, very flexible, flameresistant V2 ac |
| Application            | Machine and plant constructions, vehicle construction, rail vehicles outside applications, shipbuilding, automation, electrical installations   |
| Tested acc. to         | EN / IEC 61386-23   |
| Protection class       | IP 68   |
| Operation temperature  | -50°C / +100°C / ^ +130°C   |
| Outer diameter         | 27 mm   |
| Inner diameter         | 23 mm   |
| Bending radius static  | 115 mm  |
| Bending radius dynamic | 290 mm  |
| Bushing                | 5031.027.021  |
| Dispatch               | 50  |

Colour black on request