


## PCE data sheet

|                        |                                                                                                                                                                                                                                                                                                             |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>8013-6ttv</b>                                                                                                                                                                                                                                                                                            |
| article description    | <b>CEE angled plug 16A 3p 6h IP44 TT TWIST</b>                                                                                                                                                                                                                                                              |
| description long       | CEE angled plug 16A 3p 6h IP44 TT TWIST<br>housing material: PA6<br>rated current: 16A<br>number of poles: 3 (2P+PE)<br>clock-position: 6h<br>rated voltage/frequency: 200-250V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screwless terminals (TT)<br>IP protection class: IP44 |
| GTIN (EAN)             | 9003399617157                                                                                                                                                                                                                                                                                               |
| country of origin      | AT                                                                                                                                                                                                                                                                                                          |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                    |
| net weight             | 0.110 kg                                                                                                                                                                                                                                                                                                    |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                          |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                          |

|                            |                       |
|----------------------------|-----------------------|
| ETIM 8.0                   | EC000140              |
| IEC-amperage               | 16 A                  |
| Number of poles            | 3                     |
| Voltage acc. EN 60309-2    | 230 V (50+60 Hz) blue |
| Clock hour position        | 6 h                   |
| Identification colour      | Blue                  |
| Degree of protection (IP)  | IP44                  |
| Connection system          | Screw less terminal   |
| Cable entry                | Swivel                |
| Angle of plug              | Angled                |
| Material                   | Plastic               |
| Contact material           | CuZn                  |
| Surface treatment contacts | Nickel-plated         |

|                    |                       |
|--------------------|-----------------------|
| a                  | 96 mm                 |
| b                  | 60 mm                 |
| c                  | 47 mm                 |
| d                  | 88 mm                 |
| e                  | 15 °                  |
| K (cable Ø)        | 6-15 mm               |
| SW                 | 38 mm                 |
| wire flexible      | 1-2,5 mm <sup>2</sup> |
| strain relief      | 500 Ncm               |
| dismantling length | 50 mm                 |
| stripping length   | 10-12 mm              |

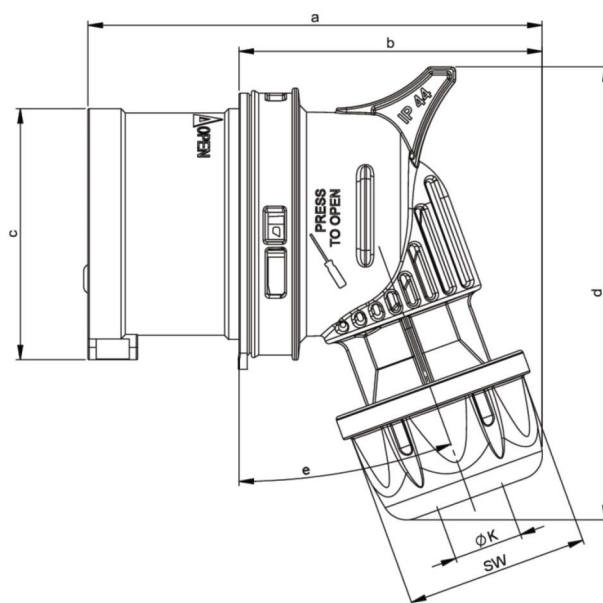

<https://www.pcelectric.at/shop/en/?func=detail&artnr=8013-6ttv>



[www.manufacturer-safety.info](http://www.manufacturer-safety.info)