


PHE 15 16.7 BEL STK (767 413)

- Easy transport due to detachable insulating stick
- Pluggable end fitting with eye allows to easily and safely climb the mast

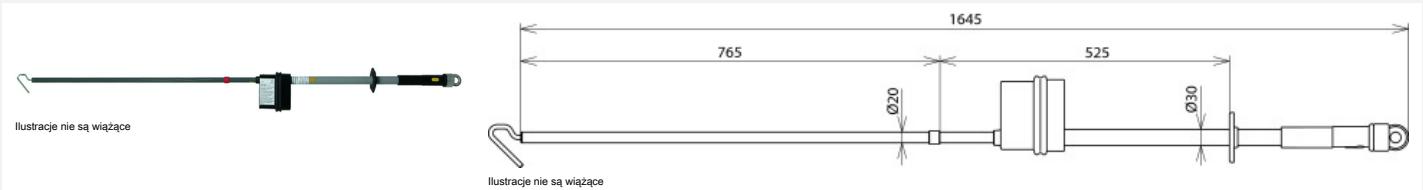

For traction power lines
Hook-shaped electrode and end fitting with plug-in coupling and non-slip eye included

Typ	PHE 15 16.7 BEL STK
Nr kat.	767 413
Nominal voltage (U _N)	15 kV
Type of voltage	a.c.
Frequency	16.7 Hz
Total length (l _o)	1645 mm
Insertion depth (l _o)	765 mm
Insulating clearance (l _i)	525 mm
Length (test prod)	992 mm
Length of the operating stick (with hand guard)	638 mm
Standard	EN/IEC 61243-1 (DIN VDE 0682-411)
Temperature range	-25 °C ... +55 °C, climatic category N
Design	Complete
For use at	
For	Outdoor installations
Application	Overhead contact lines of electric railways
Design	Single-pole
Indication	Visual
Self-testing element	Yes
Material (test prod)	Glass-fibre reinforced epoxy resin tube
Material (test electrode)	Copper alloy/gal Sn
Material (indicator)	Plastic, fully insulated
Material (insulating stick)	Glass-fibre reinforced polyester tube
DB drawing No.	3 Ebgw 02.55
DB material No.	964 851
Waga	1,77 kg
Numer taryfy celnej (Nomenklatura scalona EU)	90303370
GTIN (EAN)	4013364128750
Jed. Op.	1 szt.

W związku z ciągłym rozwojem technicznym zastrzegamy sobie prawo wprowadzenia zmian parametrów technicznych, konfiguracji i technologii, wymiarów, wagi i materiałów. Przedstawione ilustracje nie są wiążące.