


PHEG1.S P SN7401 (767 666)

- Earth clamp with adjustable handle and magnet
- Insulating stick with plug-in coupling as end fitting for extending the handle
- Easy transport due to detachable insulating stick

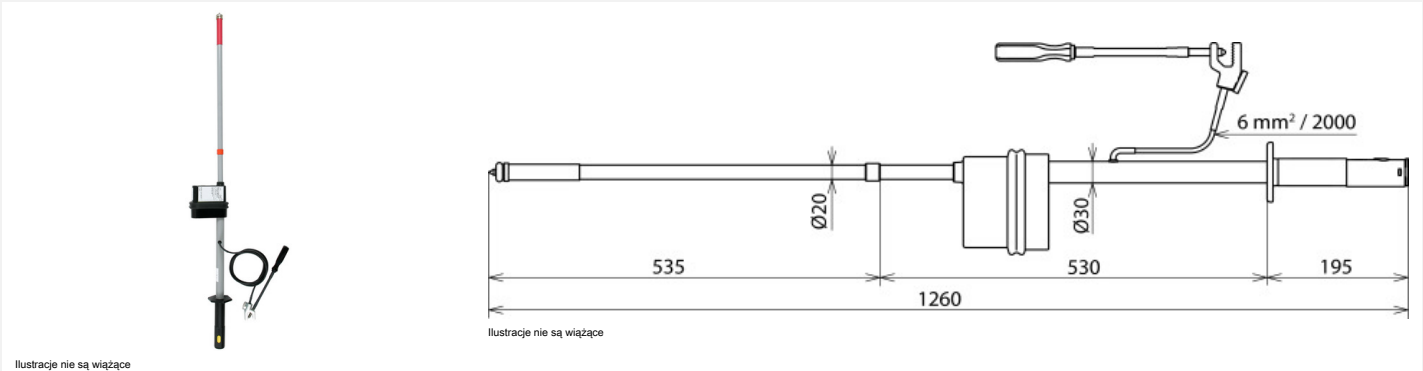

Typ	PHEG1.S P SN7401
Nr kat.	767 666
Threshold voltage (U _t)	120 V
Nominal voltage (U _N)	1 ... 24 kV
Type of voltage	d.c.
Length (indicator with test prod) (l _s)	765 mm
Length (insulating stick) (l _i)	550 mm
Length (earthing cable)	2000 mm
Total length (l _o)	1260 mm
Insertion depth (l _o)	535 mm
Earth clamp	With magnet
Standard	Based on EN/IEC 61243-1 (DIN VDE 0682-411)
Temperature range	-25 °C ... +55 °C, climatic category N
For use at	
For	Indoor and outdoor installations
Application	Switchgear installations
Design	Two-pole
Indication	Indoor and outdoor installations, for example d.c. voltage systems (electrified rail networks, d.c. links)
Self-testing element	Yes
Material (test electrode)	Copper alloy/gal Sn
Material (test prod)	Glass-fibre reinforced polyester tube
Material (indicator)	Plastic, fully insulated
Material (insulating stick)	Glass-fibre reinforced polyester tube
Material (connecting cable)	Highly flexible copper cable
Waga	2,2 kg
Numer taryfy celnej (Nomenklatura scalona EU)	90303370
GTIN (EAN)	4013364157071
Jed. Op.	1 szt.

W związku z ciągłym rozwojem technicznym zastrzegamy sobie prawo wprowadzenia zmian parametrów technicznych, konfiguracji i technologii, wymiarów, wagi i materiałów. Przedstawione ilustracje nie są wiążące.