


DSRT DD CPS AACA (782 031)

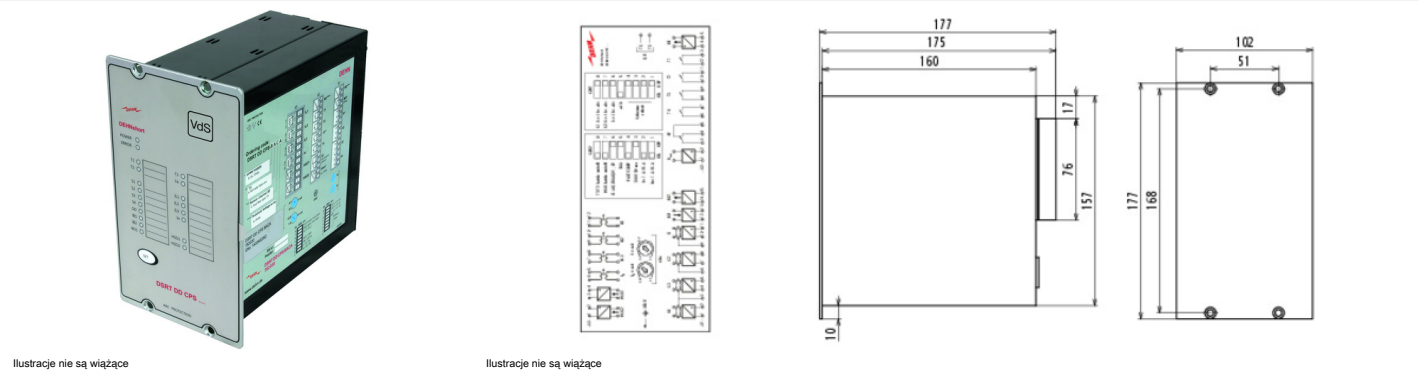

DSRT DD CPS detection device for current and light detection (DSRT PS point sensors) including output for directly connecting two DSRT QD II quenching devices.

Typ	DSRT DD CPS AACA
Nr kat.	782 031
Min. / max. voltage (U _N)	92-265 V AC / DC
Degree of protection (front side)	IP 50
Degree of protection (rear side)	IP 20
Dimensions of the front plate (wys. x sz.)	177 x 102 mm
Mounting dimensions (wys. x sz. x gł.)	157 x 82 x 164 mm
Sensor inputs	S1, S2, S3, S4 (3 sensors (DSRT PS) can be connected per channel)
Current inputs	1 A / 5 A (IL1, IL2, IL3, Io)
Binary inputs	24 V d.c., 3 mA (BI1, BI2)
Tripping relay	Up to 250 V a.c./d.c. 5 A (T1, T2, T3, T4)
High-speed outputs	Up to 250 V a.c./d.c. 2 A (HS01, HS02)
Quenching device outputs	Optical fibre cable (at least 43 mA) (2x TX)
Binary output	24 V d.c. 20 mA (B01)
Operating temperature (T _U)	−35 °C ... +70 °C
Tripping time of the relay	7 ms
Tripping time HSO	< 2 ms
Tripping time TX	< 2 ms
Arc fault quenching time (t _{mtA})	< 3-4 ms with DSRT QD II
Approvals	VdS
Waga	1,19 kg
Numer taryfy celnej (Nomenklatura scalona EU)	85364900
GTIN (EAN)	4013364245815
Jed. Op.	1 szt.

W związku z ciągłym rozwojem technicznym zastrzegamy sobie prawo wprowadzenia zmian parametrów technicznych, konfiguracji i technologii, wymiarów, wagi i materiałów. Przedstawione ilustracje nie są wiążące.