


PHE4 20 36 S (783 245)

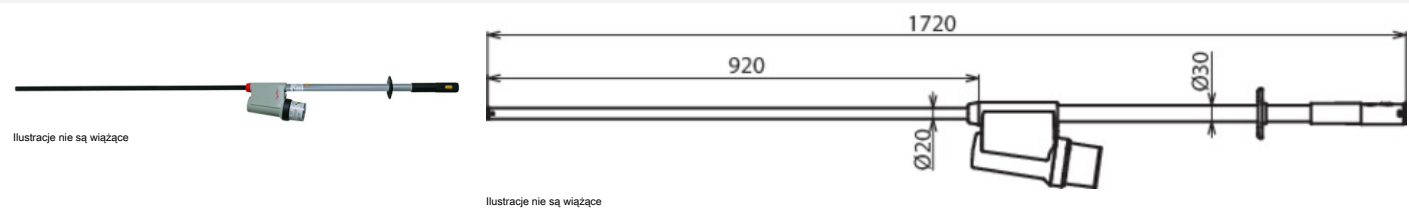

| Typ                                           | PHE4 20 36 S                                                 |
|-----------------------------------------------|--------------------------------------------------------------|
| Nr kat.                                       | 783 245                                                      |
| Nominal voltage (U <sub>N</sub> )             | 20 ... 36 kV                                                 |
| Type of voltage                               | AC                                                           |
| Frequency                                     | 50 Hz                                                        |
| Category                                      | S                                                            |
| Total length (l <sub>Σ</sub> )                | 1720 mm                                                      |
| Insertion depth (l <sub>o</sub> )             | 920 mm                                                       |
| Length (handle) (l <sub>H</sub> )             | 265 mm                                                       |
| Standard                                      | EN/IEC 61243-1 (DIN VDE 0682-411)                            |
| Temperature range                             | -25 °C ... +70 °C, climatic category N and W                 |
| Design                                        | Complete                                                     |
| For use in wet weather conditions             | Yes                                                          |
| For                                           | Indoor and outdoor installations                             |
| Application                                   | Switchgear installations and overhead lines                  |
| Design                                        | Single-pole                                                  |
| Indication                                    | Acoustic and visual                                          |
| Sound level                                   | > 67 dB(A) (visual indication and intermittent sound signal) |
| Self-testing element *)                       | Yes                                                          |
| Battery                                       | Lithium AA 1.5 Volt                                          |
| Material (test electrode)                     | Cu alloy/gal Sn                                              |
| Material (test prod)                          | Glass-fibre reinforced epoxy resin tube                      |
| Material (indicator)                          | Plastic, fully insulated                                     |
| Material (insulating stick)                   | Glass-fibre reinforced polyester tube                        |
| Diameter (insulating stick)                   | 30 mm                                                        |
| Waga                                          | 1,61 kg                                                      |
| Numer taryfy celnej (Nomenklatura scalona EU) | 90303370                                                     |
| GTIN (EAN)                                    | 4013364310032                                                |
| Jed. Op.                                      | 1 szt.                                                       |

\*) all circuits including test prod

W związku z ciągłym rozwojem technicznym zastrzegamy sobie prawo wprowadzenia zmian parametrów technicznych, konfiguracji i technologii, wymiarów, wagi i materiałów. Przedstawione ilustracje nie są wiążące.