


IS 36 SK 1000 (766 001)

- For use as switching, operating and earthing stick
- Handle closed with end cap

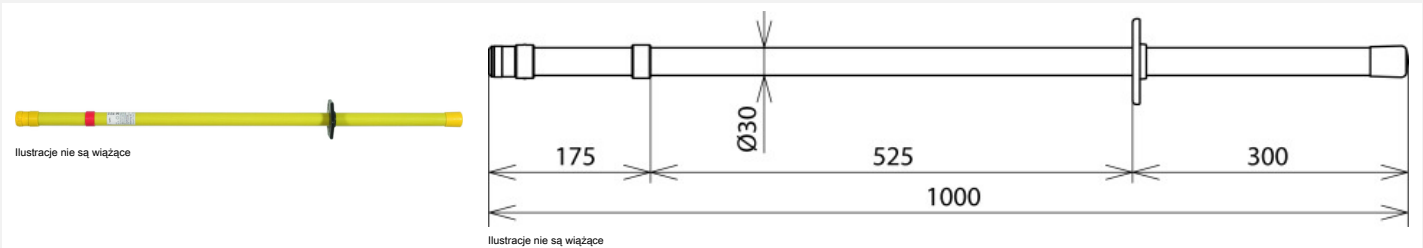

Typ	IS 36 SK 1000
Nr kat.	766 001
Nominal voltage (U _N)	1 ... 36 kV
Total length (l _g)	1000 mm
Insulating clearance (l _i)	525 mm
Handle length (l _H)	300 mm
Insertion depth (l _o)	175 mm
Standard (insulating stick)	DIN VDE V 0681-1
For	Indoor and outdoor installations
Material	Glass-fibre reinforced polyester tube
Diameter	30 mm
For use at	☀
Supporting head for	Hexagon shaft
Anti-rotation plug-in coupling including end fitting	No
Type of device	Insulating stick
Waga	416 g
Numer taryfy celnej (Nomenklatura scalona EU)	82055980
GTIN (EAN)	4013364017825
Jed. Op.	1 szt.

W związku z ciągłym rozwojem technicznym zastrzegamy sobie prawo wprowadzenia zmian parametrów technicznych, konfiguracji i technologii, wymiarów, wagi i materiałów. Przedstawione ilustracje nie są wiążące.