

# STREETOS SLIM

SLI027020NW\_PW

Street luminaire with dusk sensor STREETOS SLIM, with a power of 30 W, high light efficacy 120 lm/W. It is made of high-quality components, supported by a 5-year warranty. It has a very high degree of protection IP65, providing protection against the ingress of dust and water jets. IK08 class provides impact resistance. It shines with light of neutral - the most universal colour (4000K).




|                 |                       |                           |                 |
|-----------------|-----------------------|---------------------------|-----------------|
| Power           | <b>30 W</b>           | Voltage                   | <b>230 V</b>    |
| Luminous flux*  | <b>3600 lm (360°)</b> | Colour temperature        | <b>4000 K</b>   |
| Colour of light | <b>Neutral white</b>  | Beam angle                | <b>140/85 °</b> |
| IK              | <b>08</b>             | Degree of protection (IP) | <b>IP65</b>     |

## Technical data

|                              |                |
|------------------------------|----------------|
| Code                         | SLI027020NW_PW |
| Power                        | 30 W           |
| Nominal current              | 130 mA         |
| Voltage                      | 230 V          |
| Energy consumption           | 30 kWh/1000h   |
| Frequency                    | 50HZ Hz        |
| Protection class             | I              |
| Power factor                 | 0.9            |
| Useful luminous flux*        | 3600 lm (360°) |
| Luminous flux**              | 3000 lm (360°) |
| Lamp efficacy                | 120 lm/W       |
| Colour temperature           | 4000 K         |
| Colour of light              | Neutral white  |
| Beam angle                   | 140/85 °       |
| RA                           | 80             |
| Uniformity of color SDCM max | 5              |
| Dimmable                     | No             |
| Working temperature range    | -20/+40 °      |
| Lifespan                     | 50000 h        |
| Housing material             | Aluminum, PC   |
| IK                           | 08             |
| Degree of protection (IP)    | IP65           |
| Colour                       | Black          |
| Dimension (AxBxC)            | 423x109x76 mm  |
| Mounting hole                | 60 mm          |
| For use                      | Outside        |
| Assembly method              | On a pole      |
| Application                  | EXT            |
| Made in                      | PRC            |
| Other                        | 185-265V ,     |

## Logistics data

|                       |         |
|-----------------------|---------|
| Bulk packaging        | 10 pcs. |
| Gross weight (1 pcs.) | 0.73 kg |

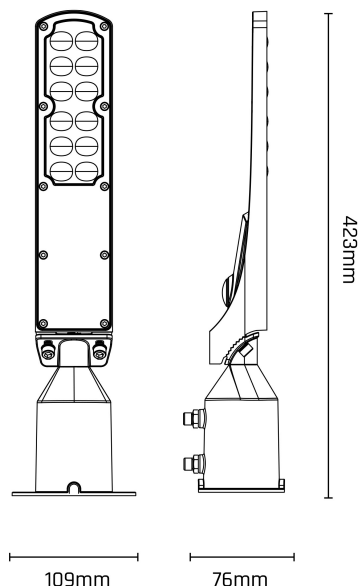

## Related documents

 User manual Declaration of Conformity

