



NEW

- Direct mounting on 35 mm rail mount acc. to EN 60715
- DC O/P voltage adjustable
- DC OK relay contact
- Universal input 90...264 V AC
- Protection: short circuit, overload, overvoltage
- Applications: in industrial automation, for supplying household appliances and building automation
- Recognitions, certifications, directives: RoHS, CE UK CA

### Output circuit

Rated output voltage	24 V DC
Output voltage tolerance	± 2% (initial set point tolerance from factory)
Output voltage adjustment range	22,8...29,5 V DC
Output current	2,5 A
Rated output power	60 W
Line regulation	< 2% 90...264 V AC, 100% load
Load regulation	< 5% 90...264 V AC, 0...100% load
PARD (20 MHz) ①	< 150 mVpp
Rise time	< 30 ms rated voltage, 100% load
Start-up time	< 500 ms rated voltage, 100% load
Hold-up time	> 20 ms 115 V AC > 50 ms 230 V AC, 100% load
Dynamic response	± 5% 10...100% load
Start-up with capacitive loads	max. 3 000 µF

### Input circuit

Rated input voltage	100...240 V AC	125...250 V DC
Input voltage range	90...264 V AC	127...370 V DC
Rated input frequency	50...60 Hz	
Input frequency range	47..63 Hz	
Input current	< 1,8 A 115 V AC	< 1 A 230 V AC
Efficiency at 100% load	> 88% 230 V AC	
Max. make current	< 30 A 115 V AC	< 60 A 230 V AC
Power factor	conform to EN 61000-3-2	
Leakage current	< 1 mA 240 V AC	

### General data

Dimensions (L x W x H)	91,9 x 40 x 100 mm	
Weight	271 g	
Ambient temperature	• storage	-40...+85 °C
	• operating	-20...+70 °C
Power de-rating	> 55 °C de-rate power by 2,7% / °C	
Relative humidity	20...90% (non-condensation and/or icing)	
Operating altitude	0...2 000 m	
Shock resistance	IEC 60068-2-27, 30G (300 m/s <sup>2</sup> ) for a duration of 18 ms	
Vibration resistance	IEC 60068-2-6, 10...500 Hz at 30 m/s <sup>2</sup> (peak: 3G), 60 min. per axis for all directions (X, Y, Z)	
Overvoltage category	II	
Insulation pollution degree	2	
Galvanic isolation	• input - output	3 000 V AC
	• input - ground	2 000 V AC
	• output - ground	500 V AC

### Protections

Overvoltage	31,2...36 V shut down O/P voltage, re-power on to recover
Overload / overcurrent	> 105...150% rated output power constant current limiting, recovers automatically after fault condition removed
Short circuit	constant current limiting, recovers automatically after fault condition removed
Cover protection category	IP 20 EN 60529
Protection against shock	Class I

① PARD (20 MHz): Periodic and Random Deviation from the power supply's output DC voltage measured at 20 MHz bandwidth.

**Reliability data**

MTBF (mean time between failures)	> 2 001 900 h Telcordia SR-332, I/P: 100 V AC, O/P: 100% load, Ta: 35 °C
Expected lifetime of capacitors	10 years 115 V AC, 230 V AC, 50% load, 40 °C
<b>Safety standards, directives</b>	
Electrical safety	EN 62368-1:2014+A11, Limited Power Source (LPS)
CE	EMC Directive 2014/30/EU Low Voltage Directive 2014/35/EU RoHS Directive 2011/65/EU
Material and parts	
EMC according to Directive 2014/30/EU	
EMC (emissions)	CISPR 32, EN 55032
Immunity to:	EN 55035
• electrostatic discharge (IEC 61000-4-2)	criteria B air discharge: ±8 kV, contact discharge: ±4 kV
• radiated field (IEC 61000-4-3)	criteria A 80 MHz...1 GHz, 3 V/M with 1 kHz tone / 80% modulation
• electrical fast transient / burst (IEC 61000-4-4)	criteria B 1 kV
• surge (IEC 61000-4-5)	criteria C line to line: 1 kV
• conducted (IEC 61000-4-6)	criteria A 0,15...80 MHz, 3 Vrms
• power frequency magnetic fields (IEC 61000-4-8)	criteria A 1 A/m
• voltage dips (IEC 61000-4-11)	criteria B&C
• low energy pulse test (ring wave) (IEC 61000-4-12)	N/A
Harmonic current emission	IEC/EN 61000-3-2, Class A
Voltage fluctuation and flicker	IEC/EN 61000-3-3
Low voltage power supplies, DC output	N/A

**De-rating for vertical and horizontal mounting orientation**

&gt; 55 °C de-rate power by 2,7% / °C

Fig. 1




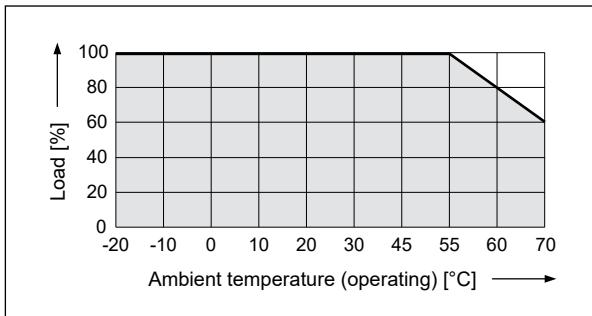
**Output de-rating depending on input voltage**

Fig. 2

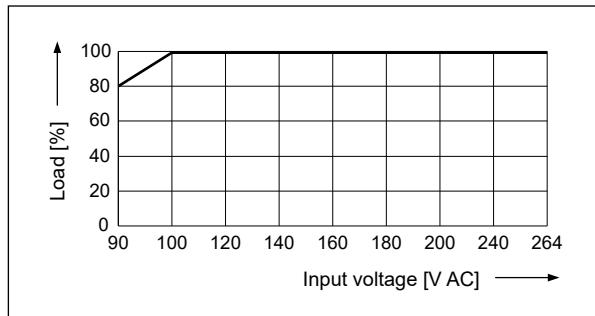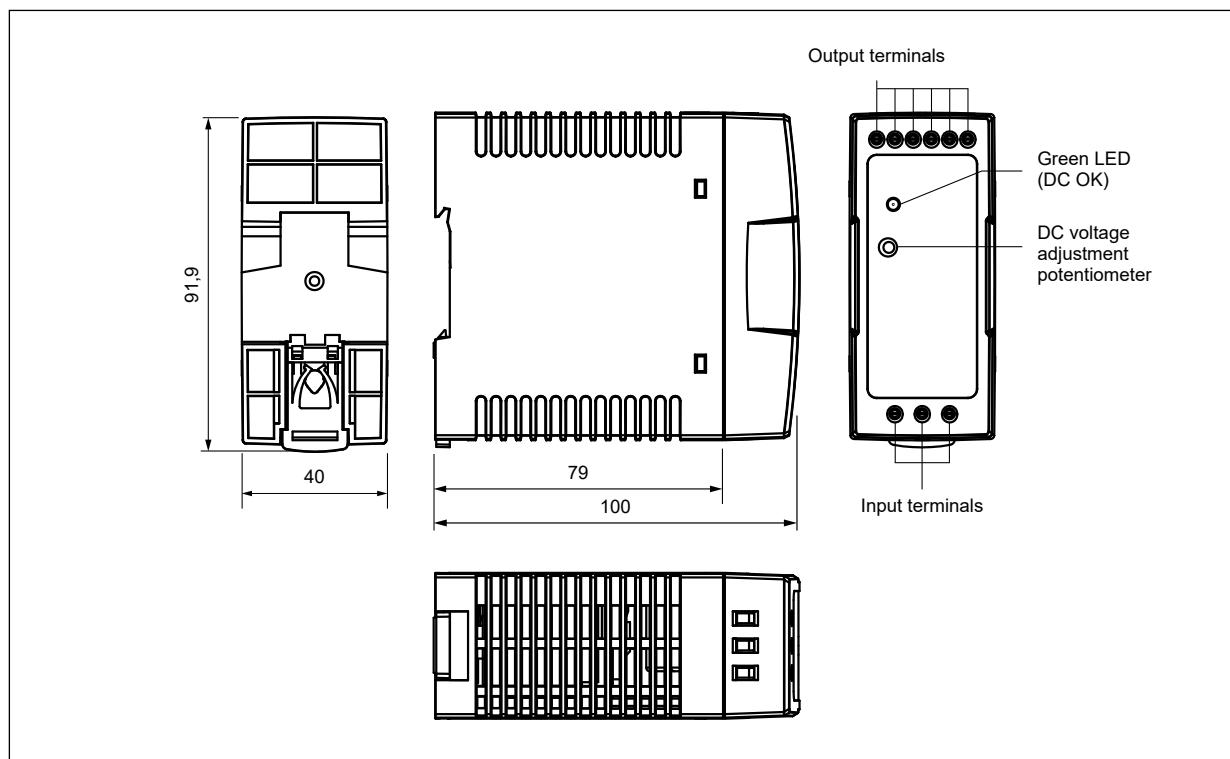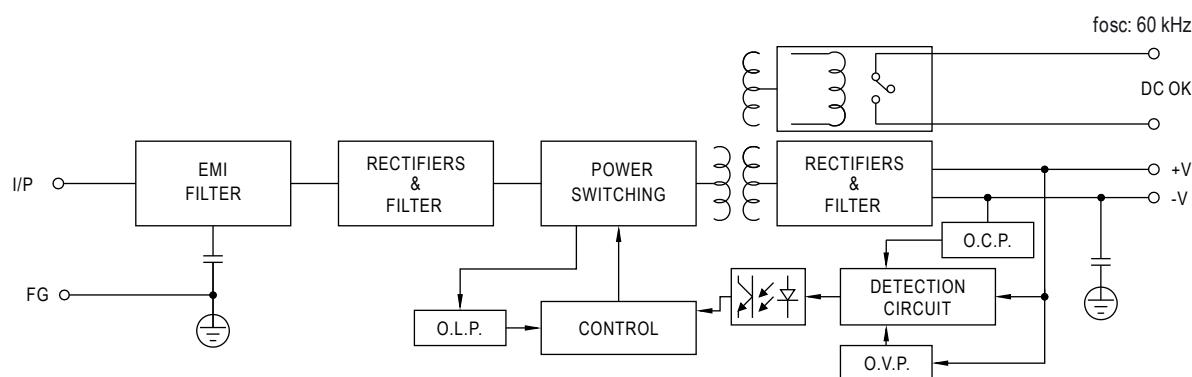

**Dimensions****Mounting**

Power supplies **RZI60-24-MSN** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. Operational position - vertical with input terminals on the bottom of the device. **Connections:** conductor cross section: 0,8...3,3 mm<sup>2</sup> (18...12 AWG), input terminals: screw connector, 3 screws M2,5 (20 A / 300 V), output terminals: screw connector, 6 screws M2,5 (20 A / 300 V).

**Block diagram****PRECAUTIONS:**

1. Ensure that the parameters of the product described in its specification provide a safety margin for the appropriate operation of the device or system and never use the product in circumstances which exceed the parameters of the product.
2. Never touch any live parts of the device.
3. Ensure that the product has been connected correctly. An incorrect connection may cause malfunction, excessive heating or risk of fire.
4. In case of any risk of any serious material loss or death or injuries of humans or animals, the devices or systems shall be designed so to equip them with double safety system to guarantee their reliable operation.