


## PCE data sheet

|                     |                                                  |
|---------------------|--------------------------------------------------|
| article#            | <b>80014-6</b>                                   |
| article description | <b>CEE-surface mounted socket 16A 4p 6h IP44</b> |
| description long    |                                                  |
| GTIN (EAN)          | 9003399037436                                    |
| country of origin   | AT                                               |
| customs number      | 85366990                                         |
| net weight          | 0.205 kg                                         |
| packaging quantity  | 10                                               |

|                           |                           |
|---------------------------|---------------------------|
| ETIM 7.0                  | EC001321                  |
| Model                     | Surface mounted (plaster) |
| IEC-ampere                | 16 A                      |
| Number of poles           | 4                         |
| Voltage acc. EN 60309-2   | 400 V (50+60 Hz) red      |
| Clock hour position       | 6 h                       |
| Identification colour     | Red                       |
| RAL-number                |                           |
| Degree of protection (IP) | IP44                      |
| Connection system         | Screwed terminal          |
| Cable entry               | None                      |
| Material                  | Plastic                   |
| Contact material          | CuZn                      |
| Surface finish contacts   | Untreated                 |
| Type of fastening         | Inner lying mounting      |

|                    |                       |
|--------------------|-----------------------|
| wire flexible      | 1-2,5 mm <sup>2</sup> |
| wire solid         | 1-4 mm <sup>2</sup>   |
| contact screws     | 100 Ncm               |
| dismantling length | 50 mm                 |
| stripping length   | 10-12 mm              |

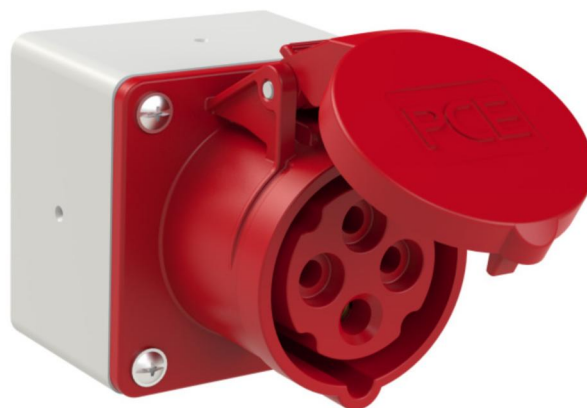

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)