
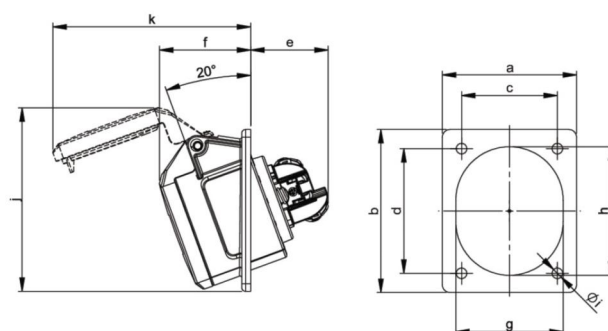


## PCE data sheet

|                     |                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#            | <b>414-6tt</b>                                                                                                                                                                                                                                                                                                                                                         |
| article description | <b>CEE-flanged socket sloping (70x85mm) 16A 4p 6h IP44 TT</b>                                                                                                                                                                                                                                                                                                          |
| description long    | CEE-flanged socket sloping (70x85mm) 16A 4p 6h IP44 TT<br>housing material: PA6<br>rated current: 16A<br>number of poles: 4 (3P+PE)<br>clock-position: 6h<br>rated voltage/frequency: 380-415V~ / 50+60Hz<br>contacts: brass<br>connection technology: screwless terminals (TT)<br>dimensions (flange/fixing center): 70x85 mm / 50x65 mm<br>IP protection class: IP44 |
| GTIN (EAN)          | 9003399581335                                                                                                                                                                                                                                                                                                                                                          |
| country of origin   | AT                                                                                                                                                                                                                                                                                                                                                                     |
| customs number      | 85366990                                                                                                                                                                                                                                                                                                                                                               |
| net weight          | 0.128 kg                                                                                                                                                                                                                                                                                                                                                               |
| packaging quantity  | 10                                                                                                                                                                                                                                                                                                                                                                     |

|                                |                      |
|--------------------------------|----------------------|
| ETIM 7.0                       | EC001317             |
| IEC-amperage                   | 16 A                 |
| Voltage acc. EN 60309-2        | 400 V (50+60 Hz) red |
| Number of poles                | 4                    |
| Clock hour position            | 6 h                  |
| Identification colour          | Red                  |
| Degree of protection (IP)      | IP44                 |
| Connection system              | Screw less terminal  |
| Angle of plug                  | Angled               |
| Material                       | Plastic              |
| Contact material               | CuZn                 |
| Surface finish contacts        | Untreated            |
| Flange size vertical           | 85 mm                |
| Drill hole distance vertical   | 65 mm                |
| Flange size horizontal         | 70 mm                |
| Drill hole distance horizontal | 50 mm                |

|                    |                       |
|--------------------|-----------------------|
| wire flexible      | 1-2,5 mm <sup>2</sup> |
| wire solid         | 1-4 mm <sup>2</sup>   |
| dismantling length | 50 mm                 |
| stripping length   | 10-12 mm              |

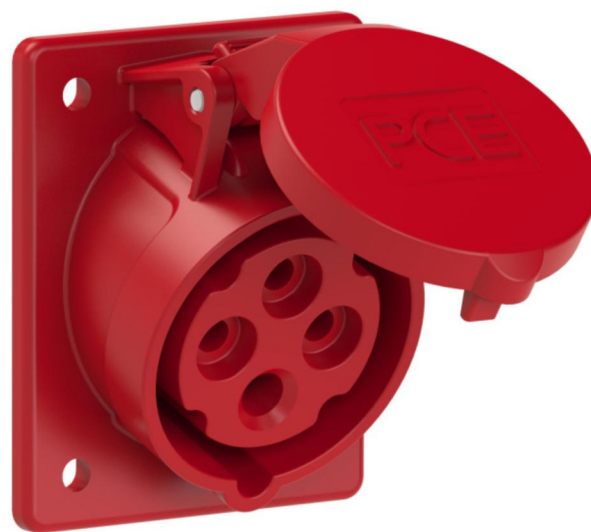

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)