


# PCE data sheet

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#            | <b>7825-6</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| article description | <b>CEE-switched interlocked socket DIN 32A 5p 6h IP44/IP54</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| description long    | CEE-switched interlocked socket DIN 32A 5p 6h IP44/IP54<br>housing material: PC/ABS<br>rated current: 32A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 6h<br>rated voltage/frequency: 200/346V~ - 240/415V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>wall mounting, mechanical interlock, incl. holder for Neozed fuses<br>switch: ON/OFF PCE-Merz ML0; EN 60947-3; AC22A, 10kA<br>cable entry: top, bottom or rear (incl. threaded blind cap)<br>IP protection class: IP44/IP54 |
| GTIN (EAN)          | 9003399167904                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| country of origin   | AT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| customs number      | 85366990                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| net weight          | 1.930 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| packaging quantity  | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

|                                  |                      |
|----------------------------------|----------------------|
| ETIM 7.0                         | EC001324             |
| IEC-ampereage                    | 32 A                 |
| Number of poles                  | 5                    |
| Voltage acc. EN 60309-2          | 400 V (50+60 Hz) red |
| Clock hour position              | 6 h                  |
| Identification colour            | Red                  |
| Degree of protection (IP)        | IP54                 |
| Switch                           | Mechanical locking   |
| Empty locations on mounting rail |                      |
| Material housing                 | Plastic              |
| Model                            | Base unit and cover  |
| Protection                       | Cylindrical fuse     |
| Contact material                 | CuZn                 |
| Surface finish contacts          | Nickel-plated        |

|               |                        |
|---------------|------------------------|
| wire flexible | 2,5-6 mm <sup>2</sup>  |
| wire solid    | 2,5-10 mm <sup>2</sup> |

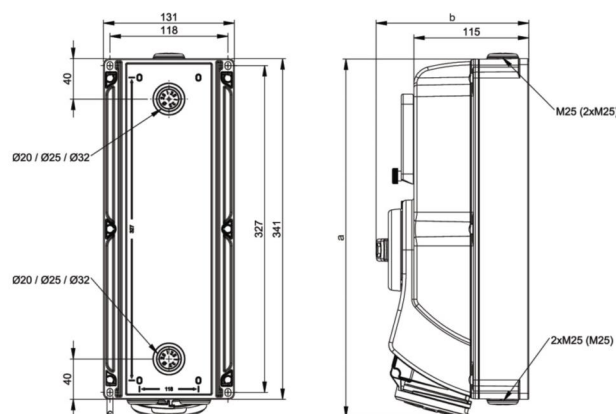

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)