


## PCE data sheet

|                        |                                                                                                                                                                                                                                                                                                   |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>193-10v</b>                                                                                                                                                                                                                                                                                    |
| article description    | <b>CEE-wall mounted socket 32A 3p 24/42VDC IP44 TWIST</b>                                                                                                                                                                                                                                         |
| description long       | CEE-wall mounted socket 32A 3p 24/42VDC IP44 TWIST<br>housing material: PA6<br>rated current: 32A<br>number of poles: 3 (3P)<br>clock-position: 10h<br>rated voltage/frequency: 24/42V DC<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>IP protection class: IP44 |
| GTIN (EAN)             | 9003399029561                                                                                                                                                                                                                                                                                     |
| country of origin      | AT                                                                                                                                                                                                                                                                                                |
| customs number         | 85366990                                                                                                                                                                                                                                                                                          |
| net weight             | 0.240 kg                                                                                                                                                                                                                                                                                          |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                |

|                           |                   |
|---------------------------|-------------------|
| ETIM 7.0                  | EC001321          |
| IEC-amperage              | 32 A              |
| Number of poles           | 3                 |
| Voltage acc. EN 60309-2   | <50 V DC grey     |
| Clock hour position       | 10 h              |
| Identification colour     | White             |
| Degree of protection (IP) | IP44              |
| Connection system         | Schraubklemme     |
| Cable entry               | Verschraubung     |
| Material                  | Plastic           |
| Type of fastening         | External mounting |
| Insulated mounting        | True              |

|                    |                        |
|--------------------|------------------------|
| a                  | 124 mm                 |
| wire flexible      | 1-10 mm <sup>2</sup>   |
| wire solid         | 1,5-10 mm <sup>2</sup> |
| contact screws     | 160 Ncm                |
| dismantling length | 70 mm                  |
| stripping length   | 14-16 mm               |

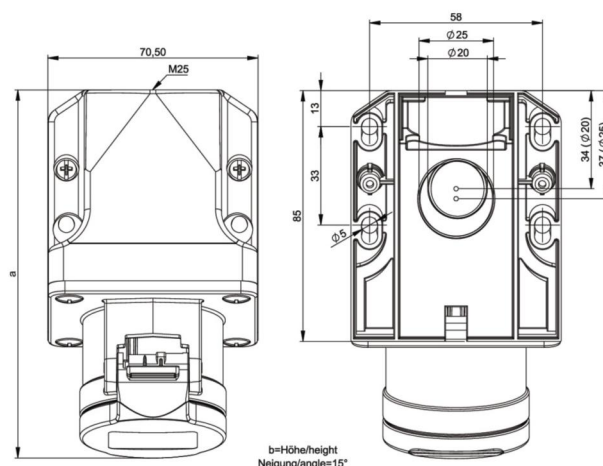

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)