


## PCE data sheet

|                        |                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>392-12f8v</b>                                                                                                                                                                                                                                                                                                                                                                            |
| article description    | <b>CEE-flanged socket straight 60x70mm 32A 2p 42VAC 50/60Hz IP44/IP54 TWIST</b>                                                                                                                                                                                                                                                                                                             |
| description long       | CEE-flanged socket straight 60x70mm 32A 2p 42VAC 50/60Hz IP44/IP54 TWIST<br>housing material: PA6<br>rated current: 32A<br>number of poles: 2 (2P)<br>clock-position: 12h<br>rated voltage/frequency: 42V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>dimensions (flange/fixing center): 60x70 mm / 47x53 mm<br>IP protection class: IP44/IP54 |
| GTIN (EAN)             | 9003399215186                                                                                                                                                                                                                                                                                                                                                                               |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                                                                          |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                                                                                    |
| net weight             | 0.112 kg                                                                                                                                                                                                                                                                                                                                                                                    |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                                                                                                          |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                                                                                                          |

|                                |                          |
|--------------------------------|--------------------------|
| ETIM 7.0                       | EC001317                 |
| IEC-amperage                   | 32 A                     |
| Voltage acc. EN 60309-2        | 40-50 V (50+60 Hz) white |
| Number of poles                | 2                        |
| Clock hour position            | 12 h                     |
| Identification colour          | White                    |
| Degree of protection (IP)      | IP54                     |
| Connection system              | Schraubklemme            |
| Angle of plug                  | Straight                 |
| Material                       | Plastic                  |
| Flange size vertical           | 70 mm                    |
| Drill hole distance vertical   | 53 mm                    |
| Flange size horizontal         | 60 mm                    |
| Drill hole distance horizontal | 47 mm                    |

|                    |                        |
|--------------------|------------------------|
| wire flexible      | 1-10 mm <sup>2</sup>   |
| wire solid         | 1,5-10 mm <sup>2</sup> |
| contact screws     | 160 Ncm                |
| dismantling length | 70 mm                  |
| stripping length   | 14-16 mm               |

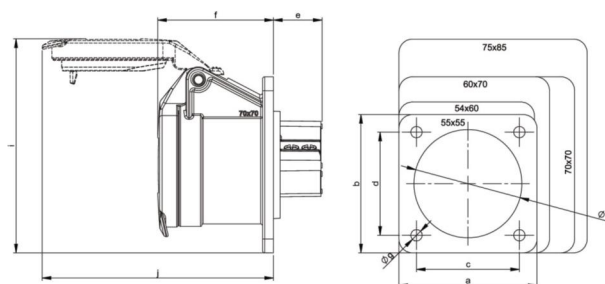

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)