
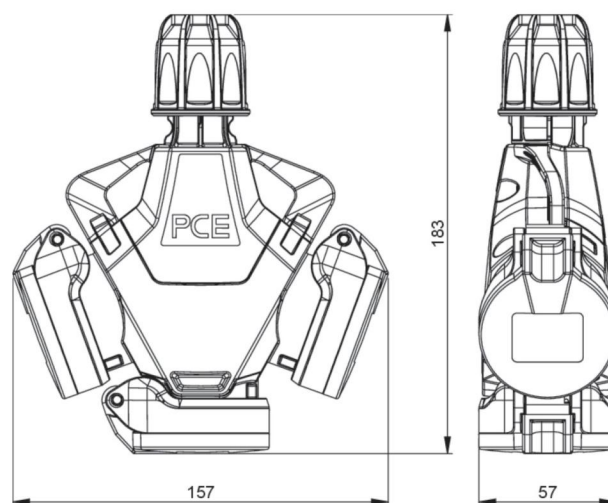


|                        |                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>253842-ss</b>                                                                                                                                                                                                                                                                                                                                                                                                        |
| article description    | <b>3-way connector TopTaurus2 solid rubber hinged lid nat LED IP54 black</b>                                                                                                                                                                                                                                                                                                                                            |
| description long       | 3-way connector TopTaurus2 solid rubber with hinged lid<br>color housing/terminal-cover: black/black<br>contact carrier: TPE<br>ready wired on 3-pole terminal block (PH1)<br>earthing system: Austrian/German (type F - with earth lug)<br>contacts: nickel plated<br>250V~ / 16A / 2P+E<br>external strain relief with gland nut, with LED voltage indicator light<br>for serve conditions<br>protection rating: IP54 |
| GTIN (EAN)             | 9003399619854                                                                                                                                                                                                                                                                                                                                                                                                           |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                                                                                                      |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                                                                                                                |
| net weight             | 0.383 kg                                                                                                                                                                                                                                                                                                                                                                                                                |
| packaging quantity     | 5                                                                                                                                                                                                                                                                                                                                                                                                                       |
| minimum order quantity | 50                                                                                                                                                                                                                                                                                                                                                                                                                      |

|                                       |                         |
|---------------------------------------|-------------------------|
| ETIM 9.0                              | EC001327                |
| Model                                 | Coupler CEE 7/3 (Typ F) |
| Material                              | Full rubber             |
| For heavy conditions according to VDE | True                    |
| Degree of protection (IP)             | IP54                    |
| Insert direction                      | Straight                |
| Connection system                     | Screwed terminal        |
| Colour                                | Black                   |
| Number of poles                       | 3                       |
| Nominal voltage                       | 250 V                   |
| Nominal current                       | 16 A                    |

|                     |                       |
|---------------------|-----------------------|
| K (cable Ø)         | 6-19 mm               |
| wire flexible       | 1-2,5 mm <sup>2</sup> |
| contact screws      | 50 Ncm                |
| housing screws      | 160 Ncm               |
| strain relief       | 400 Ncm               |
| dismantling length  | 30 mm                 |
| stripping length    | 7 mm                  |
| ambient temperature | -5 – 40 °C            |

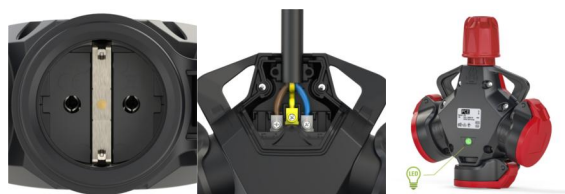

<https://www.pcelectric.at/shop/en/?func=detail&artnr=253842-ss>