



Specification Sheet

EcoSet BLE Wall Switch

The EcoSet BLE Wall Switch is used to switch and dim the EcoSet wireless luminaires, when setup together in a group.

EcoSet BLE Wall Switch

Specifications

Communication

Wireless	BLE Mesh
Carrier frequency	2.4GHz

Product data


Order product name	EcoSet BLE Wall Switch
MOQ	1 pc
Material Nr. (12NC)	911401562843
Approbations	CB, CE, RED
Dimensions (H x W x D)	86mm x 88mm x 14.5mm
Weight	112g
Lifetime	>50,000 actuations
Power supply	DC 3V
Battery type	CR2450 (not included)
Mounting options	Wall or desktop (Note: for desktop mounting, self-adhesive tape not included.)

Environment

Temperature (operating)	-20°C to 55°C
Relative humidity (operating)	0% to 95% (non-condensing)
Temperature (storage and transport)	-20°C to 60°C
Relative humidity (storage and transport)	0% to 95% (non-condensing)

Note: Communication distance is largely influenced by the wall/ceiling material and the angle that the transmitted signal is intersecting with. Note: fire-safety walls, elevator shafts and so on are considered as shielding.

Dimension drawing

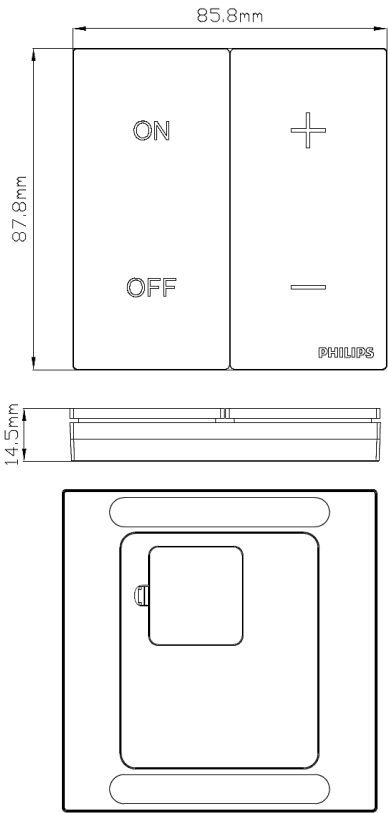

© 2023 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

August 2023



www.philips.com/lighting