



Niloé™ STEP

Double USB charger type A, C, A+C


Cat. No(s): 3 982 62B/63B/64B - 8 631 39B - 8 631 40B - 8 633 39B - 8 633 40B
- 8 634 39B - 8 634 40B - 8 635 39B - 8 635 40B



3 982 62B/63B/64B



8 633 39B



8 634 39B

1. USE

Equipped with two USB output to simultaneously charge a second device (mobile phone, smartphone, tablet, MP3, MP4, speaker, watch, game console, Powerbank).

Mechanisms supplied with protection cover.

To be equipped with plates one or several gangs.


Flush-mounting or surface-mounting.

Screw or claw fixing.

2. RANGE

Description	White	Aluminium	Medium Grey	Black
Double USB socket type A- 5 V - 3000 mA	3 982 62B	3 982 63B	-	3 982 64B
Double USB socket type C- 5 V - 3000 mA	8 631 39B	8 633 39B	8 634 39B	8 635 39B
Double USB socket type A+C- 5 V - 3000 mA	8 631 40B	8 633 40B	8 634 40B	8 635 40B

3. DIMENSIONS (mm)

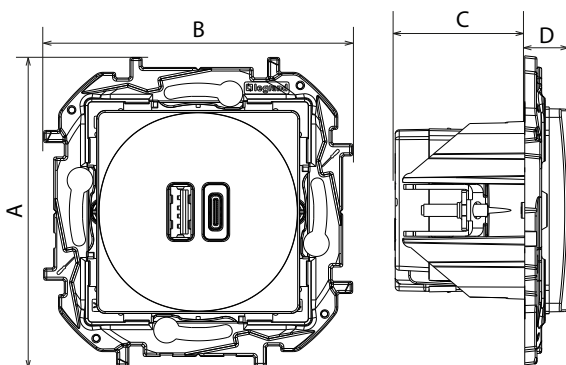

A	B	C	D
75.8	75.8	31.8	10.3

4. CONNECTION

Type of terminals: with screws

Terminal capacity: 1 x 2.5 mm²

Stripping length (mm): 6 mm

Flexible or rigid cables compatible

Recommended use: circuit terminal outlet

5. TECHNICAL CHARACTERISTICS

5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 20

Protection against impact: IK 04

5.2 Material characteristics

Mat appearance

Material : - Mechanism housing: PC

- Rocker plate: ABS

- Halogen free

- UV resistant

- Claws: steel

Material of the support: - PC + FV

- Halogen free

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place

+ 650° C / 30 s for other parts made of insulating materials

5. TECHNICAL CHARACTERISTICS (continued)

■ 5.3 Electrical characteristics

All values listed below are measured at an ambient temperature of + 25° and after 15 minutes of operation.

Nominal input voltage	100 - 240 V~
Nominal input frequency	50-60 Hz
Maximum input current	300 mA
Maximum power consumption in standby	0.075 W
Average active efficiency	82 %
Nominal output voltage	5 V=
Maximum output current	3000 mA
No-load power consumption class and average efficiency level: level VI*	
Safety-standard	EN60950-1
Protection class	II - Low voltage

*NB: European Regulation No. 278/2009 of 6 April 2009, Directive 2005/32/EC on eco-design requirements for AC/DC power supplies.

■ 5.4 Average charging time for devices equipped with lithium ion polymer batteries:

- 80 % charged < 1 h 15
- 100 % charged < 2 h 00

Note : To optimize the charging time of your device, ensure turn it off during the charging phase.

■ 5.5 Climatic characteristics

Storage temperature: - 20° C to + 70° C
Use temperature: - 5° C to + 40° C

6. MAINTENANCE

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

Maintenance with the following products: Hexane, Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%, Window-cleaning products.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

The undersigned, LEGRAND, declares that the radio-electric equipment type (Cat. Nos 3 982 62B - 3 982 63B - 3 982 64B - 8 631 39B - 8 631 40B - 8 633 39B - 8 633 40B - 8 634 39B - 8 634 40B - 8 635 39B - 8 635 40B) complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website: www.legrand.com/ecatalogue