

Component-holder cartridge

with UL94V-0 polyamide insulating body

- to be mounted on MPFA.4, DSFA.4 and HMFA.2 (see page 84)
- a fuse \varnothing 5 x 20 mm can be inserted (our type F5, with or without signalling LED, diode (1 or 3 A), brass pin \varnothing 5 x 20 mm and other components (e.g. resistors)



Max. dissipated power – In conf. with IEC 60947-7-3						
Terminal block	Voltage [V] (*)	Current [A]	Protection against overload and short circuit		Only protection against short circuit	
			Single configuration (PV) - [W]	Composite configuration (PV) - [W]	Single configuration (PV) - [W]	Composite configuration (PV) - [W]
MPFA.4 + CPF/5	250	6,3	1,6	1,6	4	1,6
DSFA.4 + CPF/5	250	6,3	1,6	1,6	4	1,6
HMFA.2 + CPF/5	250	6,3	1,6	1,6	4	1,6

standard version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm ²)
connecting capacity	
flexible	(mm ²)
rigid	(mm ²)
max. flexible with ferrule (mm ²)-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL
(Ex e) rated voltage /	(V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

CPF/5	
Cat. No.	CPF05
component-holder cartridge	
-	
-	
-	
-	
320 V (a) / 6,3 A (a) / A5	
-	
-	
4 KV / 3	
-	
-	
(b) / 33 / 6	
(b) / 33 / 6	
(b) / 33 / 6	

The cartridge can contain a spare fuse, instead of the LED signalling circuit.



APPROVALS

Approvals referred to the terminal blocks, on which the cartridge is mounted – see table

ACCESSORIES	
Marking tag	printed or blank
Tinned brass conductor	\varnothing 5 x 20 mm
Cartridge / insert with 1 A diode	
Cartridge / insert with 3 A diode	

Type	Cat. No.
CNU/8/51	NU0851
CO/5	VL103
SFR/11A (with 1 A diode)	SF992
SFR/13A (with 3 A diode)	SF993

VERSIONI PREDISPOSTE	
With non-polarized LED microcircuit	12 Vdc / Vac
With non-polarized LED microcircuit	24 Vdc / Vac
With non-polarized LED microcircuit	48 Vdc / Vac
With non-polarized LED microcircuit	115 Vdc / Vac
With non-polarized LED microcircuit	230 Vdc / Vac
With 1 A diode (1N4001 ÷ 1N4007 types)	
With 3 A diode (BY255 type)	
With resistor 1200 Ω (1 W \pm 5%)	


Type	Cat. No.
CPF/5L12	CPF512
CPF/5L24	CPF524
CPF/5L48	CPF548
CPF/5L115	CPF511
CPF/5L230	CPF523
CPF/5D1A	CPF501
CPF/5D3A	CPF503
CPF/5R	CPR05

Note:

(a) with fuse \varnothing 5 x 20 mm, 250 V, I_{max} = 6,3 A – with brass pin I_{max} = 10 A

(b) total value, when the cartridge is mounted on terminals, considering as well the mounting rail:

Terminal block	Height on rail TH/35 7,5 (mm)	Height on rail TH/35 15 (mm)	Height on rail G32 (mm)
HMFA.2	57	75	-
MPFA.4	75	83	79
DSFA.4	96	104	100

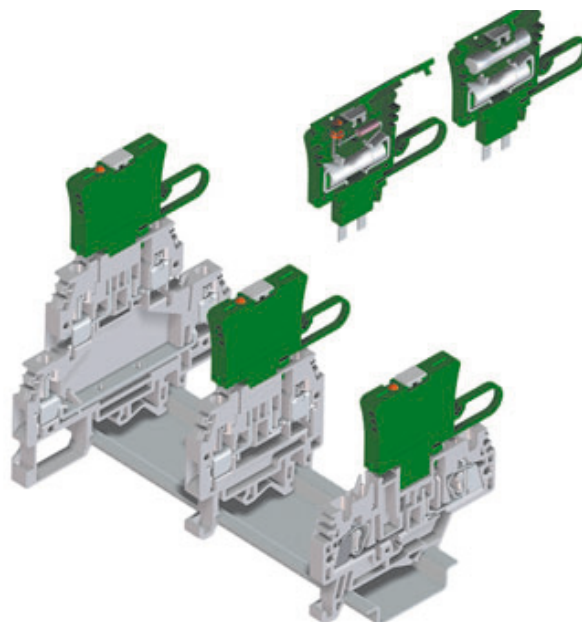

View of the different choices for mounting the cartridge respectively on terminals DSFA.4, MPFA.4 or HMFA.2.

When the cartridge is mounted on HMFA 2 terminals, adjoining one another, a terminal strip must be envisaged between one terminal and the next, because of the pitch differential between terminal and cartridge.