
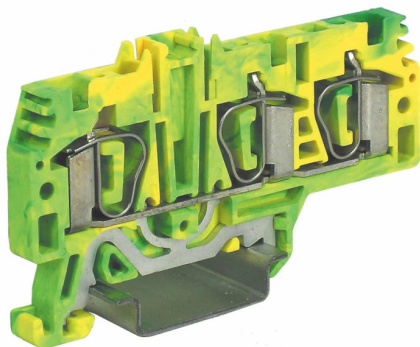


## spring clamp terminal block 1 level earth connection 4 mm<sup>2</sup>

|                                                                                   |                                |
|-----------------------------------------------------------------------------------|--------------------------------|
| Series                                                                            | HTE                            |
| Code                                                                              | HT260                          |
| Type                                                                              | HTE.4/1+2                      |
| HS code                                                                           | 85369010                       |
| Colour                                                                            | Yellow-green                   |
| <b>TECHNICAL FEATURES</b>                                                         |                                |
| Function/Type                                                                     | Earth terminal blocks          |
| Rated cross-section                                                               | 4 mm <sup>2</sup>              |
| Connecting capacity                                                               |                                |
| Flexible wire                                                                     | 0.2-6 mm <sup>2</sup>          |
| Rigid wire                                                                        | 0.2-6 mm <sup>2</sup>          |
| Wire with ferrule - ferrule type                                                  | 4 mm <sup>2</sup> - WP40/16    |
| <b>Electrical characteristics according to IEC EN standard</b>                    |                                |
| Maximum current (rated cross-section)                                             | -                              |
| Caliber                                                                           | A4                             |
| <b>Electrical characteristics according to UL Standard</b>                        |                                |
| Maximum voltage AC/DC                                                             | 600 V                          |
| Maximum current (rated cross-section)                                             | -                              |
| Section (min-max)                                                                 | 24-10 (AWG)                    |
| <b>Electrical characteristics according to ATEX directive and IEC Ex standard</b> |                                |
| Maximum voltage AC/DC                                                             | 500 V                          |
| Operating temperature Min/Max                                                     | -40 °C / +80 °C                |
| Insulation stripping length                                                       | 12 mm                          |
| Width (pitch)                                                                     | 6.2 mm                         |
| Length                                                                            | 78 mm                          |
| Height mounted on TH35-7.5/TH35-15/G32                                            | 45 / 52 / - mm                 |
| Insulation material temperature index (EN 60216-1)                                | 130 °C                         |
| Plastic material                                                                  | Polyamide UL94V-0              |
| <b>ACCESSORIES</b>                                                                |                                |
| <b>End section</b>                                                                |                                |
| Grey                                                                              | HMT.4/1+2/PT/GR (cod. HM211GR) |
| Blue                                                                              | -                              |
| Thickness                                                                         | 1.5 mm                         |
| <b>Cross-connection</b>                                                           |                                |
| Cross-connection identification strip                                             | PTC/SP (cod. PTC0990)          |
| Coloured partition plate                                                          | DFH/1/R (cod. DH01R)           |
| Cross-connection barrier                                                          | -                              |
| Test plug                                                                         | SDD/1 (cod. DD001)             |
| Modular test plug                                                                 | -                              |
| End section for modular test plug                                                 | -                              |
| <b>Marking</b>                                                                    |                                |
| Single marking tag                                                                | CNU/8/61 (cod. NU0861S)        |
| Single marking tag for pitch insertion                                            | -                              |
| <b>End bracket</b>                                                                |                                |
| TH35 screw type                                                                   | BT/3 (cod. BT003)              |
| TH35 snap-fit type                                                                | BTO (cod. BT007)               |
| TH35 and G32 snap-fit type                                                        | BTU (cod. BT005)               |
| DIN rail according to IEC 60715/TH35                                              | PR/3/..                        |
| <b>APPROVALS AND MARKINGS</b>                                                     |                                |
|                                                                                   |                                |



1 For more details on accessories, refer to the relevant chapters

## DESCRIZIONE DEL PRODOTTO

spring clamp terminal block 1 level earth connection 4 mm<sup>2</sup>