



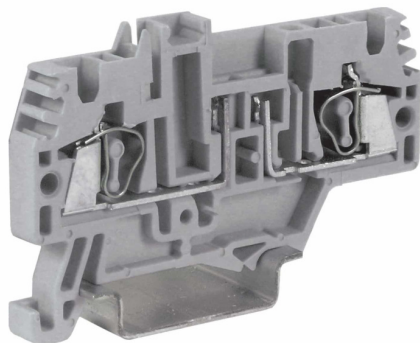

MAX. DISSIPATED POWER IN CONJ. WITH HC 082L-7-0				
Terminal block	HM2L+ GFS	HM2L+ GFS	HM2L+ GFS	
Voltage (V)	250	250	250	
Current (A)	6.3	6.3	6.3	
Power (W) typical ambient and 100% duty cycle	Single conductor (PVI - 08)	5.6	5.6	5.6
	Double conductor (PVI - 16)	5.6	5.6	5.6
		6	6	6
Single conductor ambient 100% duty cycle	Single conductor (PVI - 08)	5.6	5.6	5.6
	Double conductor (PVI - 16)	5.6	5.6	5.6
		6	6	6

Series	HMFA
Code	HF300GR
Type	HMFA.2/GR
HS code	85369010
Colour	grey
TECHNICAL FEATURES	
Function/Type	Fuse-holder "blade" type
Rated cross-section	2.5 mm ²
Connecting capacity	
Flexible wire	0.2-4 mm ²
Rigid wire	0.2-4 mm ²
Wire with ferrule - ferrule type	2.5 mm ² – WP25/14
Electrical characteristics according to IEC EN standard	
Maximum voltage AC/DC	400 V
Maximum current (rated cross-section)	6.3 A
Caliber	A3
Electrical characteristics according to UL Standard	
Maximum voltage AC/DC	600 V
Maximum current (rated cross-section)	
Section (min-max)	
Rated impulse withstand voltage / pollution degree	4 kV / 3
Insulation stripping length	10 mm
Width (pitch)	5.2 mm
Length	66 mm
Height mounted on TH35-7.5/TH35-15/G32	41 / 49 / – mm
Insulation material temperature index (EN 60216-1)	130 °C
Plastic material	Polyamide UL94V-0
ACCESSORIES	
End section	
Grey	HMT.2/1+2/PT/GR (cod. HM511GR)
Blue	–
Thickness	1.5 mm
Cross-connection	
Model A)	PTC/03/... (cod. PTC03...)
Model B)	PTP/03/... (cod. PTP03...)
Rated current carrying capacity IEC/ATEX	24 A
Cross-connection identification strip	–
Coloured partition plate	DFH/2/R (cod. DH02R)
Cross-connection barrier	–
Test plug	SDD/1 (cod. DD001)
Modular test plug	SDH/5 (cod. DH005)
End section for modular test plug	SH5/PT (cod. DH501)
Maximum voltage AC/DC	600 V
Maximum current (rated cross-section)	6.3 A
Section (min-max)	26-12 (AWG)
Marking	
Single marking tag	CNU/8/51 (cod. NU0851S)
Single marking tag for pitch insertion	–
Fuse type	
Conductive element	CO/6 (cod. CO06)
Cartridge	CPF/5 (CPF05)
End bracket	
TH35 screw type	BT/3 (cod. BT003)
TH35 snap-fit type	BTO (cod. BT007)
TH35 and G32 snap-fit type	BTU (cod. BT005)
DIN rail according to IEC 60715/TH35	PR/3/..
APPROVALS AND MARKINGS	



Copyright © Cabur srl Sede legale Località isola Grande, 45 – 17041 Altare (SV) – Italia – Tel. 019-589991 – Fax 019-58999233 – E-mail: info@cabur.it

1 For more details on accessories, refer to the relevant chapters

DESCRIZIONE DEL PRODOTTO

spring clamp terminal block 1 level fuse-holder, 2.5 mm², grey