


On two levels

with UL94V-0 polyamide insulating body

- feed-through
- feed-through, equipped with internal cross-connection
- available in standard (grey RAL 7042 and beige RAL 1001 colours) or (Ex)i "intrinsic safety" circuits (blue RAL 5015 colour) versions
- universal mounting onto IEC 60715 rails
- DAS.4 terminal block **CESI 03 ATEX 162 U** Ex e certificate I M2 / II 2 G D operating temperature range: -40 ÷ +80 °C

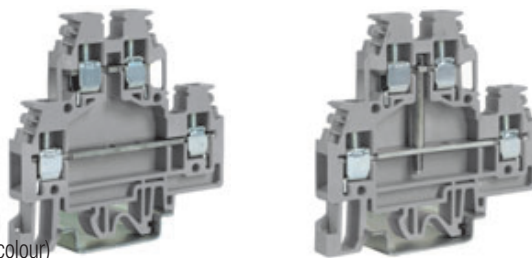

- when rail assemblies are to be manufactured for potentially explosive environments (Ex e) please refer to the indications given on page A14

The **/GR** tag indicates the grey colour version.

grey version	
beige version	
(Ex)i version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm²)
connecting capacity	
flexible	(mm²)
rigid	(mm²)
max. flexible with ferrule (mm²)-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL
(Ex e) rated voltage	(V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

DAS.4/GR	
	Cat. No. DS100GR
DAS.4	
	Cat. No. DS100
DAS.4 (Ex)i	
	Cat. No. DS200
2 level feed-through	
4	
0,2 ÷ 6	
0,2 ÷ 6	
4 - WP40/16	
630 V / 32 A / A4	
600 V / 20 A / 20-12 AWG / 8,9 lb.in	
400 / 400	
8 kV / 3	
9	
0,5 / 1,2	
62 / 64 / 6	
70 / 64 / 6	
66 / 64 / 6	

DAS.4/CI/GR	
	Cat. No. DS117GR
DAS.4/CI	
	Cat. No. DS117
DAS.4/CI (Ex)i	
	Cat. No. DS217
feed-through equipped with internal cross-connection	
4	
0,2 ÷ 6	
0,2 ÷ 6	
4 - WP40/16	
630 V / 32 A / A4	
-	
8 kV / 3	
9	
0,5 / 1,2	
62 / 64 / 6	
70 / 64 / 6	
66 / 64 / 6	

APPROVALS



IEC Ex pending

Approvals referred to terminal block type DAS.4

ACCESSORIES	
End sections	grey beige blue
Permanent cross connection	
Rated current carrying capacity of jumper	(A)
Cross-connection identification strip (100 mm)	green
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve (same, Ex e version)	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Numbering strip	
Shunting screw and sleeve	
Cover for cross-connection	
Marking tag	printed or blank
End bracket	
Mounting rail	
according to IEC 60715 Std.	

Type	Cat. No.
DAS/PT/GR	DS101GR
DAS/PT	DS101
DAS/PT (Ex)i	DS201
PM/41/2 poles	PM412
PM/51/3 poles	PM513
PM/51/5 poles	PM515
PM/51/10 poles	PM510
32	
-	
POS/43	POS43
PMP/58	PMP58
CPM/01 (CPX/01)	CPM01 (CPX01)
DFU/7	DU07..
-	
PSD/A	PD001
SDD/1	DD001
-	
CNU/8/61	NU0861
DAS/VCI	DS107
DAS/VCE	DS108
PRP/5	PRP05
CNU/8/61	NU0861
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BT0 for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
PR/3/AC for PR/DIN and PR/3	PR003
PR/3/AS same with slots	PR005

Type	Cat. No.
DAS/PT/GR	DS101GR
DAS/PT	DS101
DAS/PT (Ex)i	DS201
PM/41/2 poles	PM412
PM/51/3 poles	PM513
PM/51/5 poles	PM515
PM/51/10 poles	PM510
32	
-	
POS/43	POS43
PMP/58	PMP58
CPM/01 (CPX/01)	CPM01 (CPX01)
DFU/7	DU07..
-	
PSD/A	PD001
SDD/1	DD001
-	
CNU/8/61	NU0861
-	
DAS/VCE	DS108
PRP/5	PRP05
CNU/8/61	NU0861
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BT0 for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
PR/3/AC for PR/DIN and PR/3	PR003
PR/3/AS same with slots	PR005