HS200GR

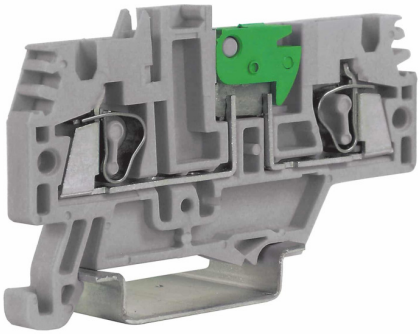



spring clamp terminal block for test and measuring circuits, 2.5 mm², grey

Series	HMS – HSCB
Code	HS200GR
Type	HMS.2/GR
HS code	85369010
Colour	grey
TECHNICAL FEATURES	
Function/Type	Disconnector
Rated cross-section	2.5 mm²
Connecting capacity	
Flexible wire	0.2-4 mm²
Rigid wire	0.2-4 mm²
Wire with ferrule - ferrule type	2.5 mm² – WP25/14
Electrical characteristics according to IEC EN standard	
Maximum voltage AC/DC	400 V
Maximum current (rated cross-section)	16 A
Caliber	A3
Electrical characteristics according to UL Standard	
Maximum voltage AC/DC	600 V
Maximum current (rated cross-section)	24 A
Section (min-max)	24-12 (AWG)
Electrical characteristics according to ATEX directive and IEC Ex standard	
Rated impulse withstand voltage / pollution degree	4 kV / 3
Insulation stripping length	10 mm
Widht (pitch)	5.2 mm
Length	66 mm
Height mounted on TH35-7.5/TH35-15/G32	37 / 45 / – mm
Insulation material temperature index (EN 60216-1)	130 °C
Plastic material	Polyamide UL94V-0
ACCESSORIES	
End section	
Grey	HMT.2/1+2/PT/GR (cod. HM511GR)
Blue	–
Thickness	1.5 mm
Cross-connection	
Model A)	PTC/03/... (cod. PTC03...)
Model B)	PTP/03/... (cod. PTP03...)
Rated current carrying capacity IEC/ATEX	24 A
Cross-connection identification strip	–
Coloured partition plate	DFH/2/R (cod. DH02R)
Cross-connection barrier	–
Test plug	SDD/1 (cod. DD001)
Modular test plug	SDH/5 (cod. DH005)
End section for modular test plug	SH5/PT (cod. DH501)
Screw and plate for short-circuit	
Screw and sleeve	–
2 poles plate	–
4 poles plate	–
Marking	
Single marking tag	tbd
Single marking tag for pitch insertion	–
End bracket	
TH35 screw type	BT/3 (cod. BT003)
TH35 snap-fit type	BTO (cod. BT007)
TH35 and G32 snap-fit type	BTU (cod. BT005)
DIN rail according to IEC 60715/TH35	PR/3/..
APPROVALS AND MARKINGS	

***** Disconnection by lever and by slide link***** For test and measurement circuits
1 For more details on accessories, refer to the relevant chapters

Copyright © Cabur srl Sede legale Località isola Grande, 45 – 17041 Altare (SV) – Italia – Tel. 019-589991 – Fax 019-58999233 – E-mail: info@cabur.it

DESCRIZIONE DEL PRODOTTO

spring clamp terminal block for test and measuring circuits, 2.5 mm², grey

Copyright © Cabur srl Sede legale Località isola Grande, 45 – 17041 Altare (SV) – Italia – Tel. 019-589991 – Fax 019-58999233 – E-mail: info@cabur.it