



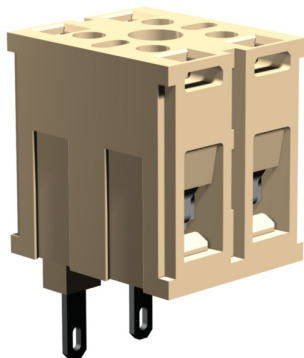

Modello	Descrizione	Materiali
BP300-4/PS	4 poli, 4 mm², PS	Poliamide UL94V-0
BP300-4	4 poli, 4 mm²	Poliamide UL94V-0
BP300-3	3 poli, 4 mm²	Poliamide UL94V-0
BP300-2	2 poli, 4 mm²	Poliamide UL94V-0
BP300-1	1 polo, 4 mm²	Poliamide UL94V-0

modular multi-pole terminal, 4 mm², beige

Series	BPL-TPL
Code	BP300
Type	BPL-4/PS
HS code	85369010
Colour	Beige
TECHNICAL FEATURES	
Function/Type	Feed-through with solder terminal
Rated cross-section	4 mm²
Rated cross-section	
Connecting capacity	
Flexible wire	0.5-4 mm²
Rigid wire	0.5-6 mm²
Wire with ferrule - ferrule type	4 mm² - WP40/16
Electrical characteristics according to IEC EN standard	
Maximum voltage AC/DC	500 V
Maximum current (rated cross-section)	32 A
Caliber	A4
Electrical characteristics according to UL Standard	
Maximum voltage AC/DC	300 V
Maximum current (rated cross-section)	20 A
Section (min-max)	18-12 (AWG)
Tightening torque value (UL)	4.4 lb.in
Electrical characteristics according to ATEX directive and IEC Ex standard	
Maximum voltage AC/DC	-
Maximum current (rated cross-section)	-
Rated impulse withstand voltage / pollution degree	6 kV / 3
Insulation stripping length	9 mm
Tightening torque value (nom. / max.)	0.5 / 0.7 Nm
Dimension	20x24x36 mm (AxBxH)
Insulation material temperature index (EN 60216-1)	130 °C
Plastic material	Polyamide UL94V-0
ACCESSORIES	
End section	-
Insulated bushing	-
APPROVALS AND MARKINGS	 



* Panel mountable with M3 screw (max. 5.6 mm head diameter)* With dovetail joint for multiple connection* PS version has a flat plug (2.3x0.8 mm) for welding connection

DESCRIZIONE DEL PRODOTTO

modular multi-pole terminal, 4 mm², beige