

QBLOK Series


Applications

Partition terminal boards are used as supplementary terminal blocks for phase expansion or neutral expansion inside electrical panels.

They are also known as equipotential terminal boards because they are used as equipotential nodes in distribution control units to collect the Earthing system.

General characteristics

- Available in 7 and 12 hole versions
- Mounting onto PR/3 profiles conforming to IEC 60715 standards, TH/35 type
- Inherent protection against accidental contact IPXXB level according to IEC 60529
- Marking possible with a CNU/8 or CNU/10 tag
- Available in green and blue
- Insulating in polyamide 6.6 UL94V-0

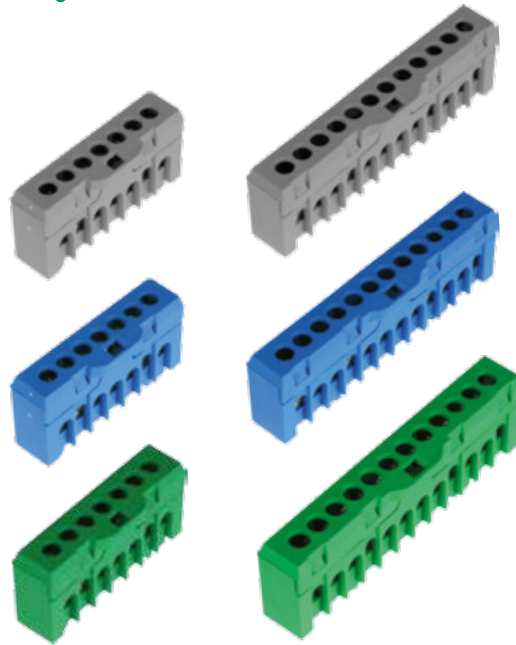

Grey version	
Blue version	
Green version	
height / width / thickness	TH/35 7.5 mm
height / width / thickness	TH/35 15 mm
TECHNICAL CHARACTERISTICS	
function/type	
number and diameter of holes	
rated cross-section	(mm²)
connecting capacity	
flexible (mm²)	
rigid (mm²)	
max. flexible with ferrule (mm²)-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)

QBLOK.7/GR	
Cat. No.	QBLOK7003
QBLOK.7/BLU	
Cat. No.	QBLOK7001
QBLOK.7/TE	
Cat. No.	QBLOK7002
33 / 53 / 16	
41 / 53 / 16	
Distribution terminal boards	
7 holes Ø 5.3 mm	
10	
1.5-10	
1.5-16	
10-WP100/21	
500 V / 63 A / B5	
-	
6	
2 / 2.5 Nm	
	

QBLOK.12/GR	
Cat. No.	QBLOK1203
QBLOK.12/BLU	
Cat. No.	QBLOK1201
QBLOK.12/TE	
Cat. No.	QBLOK1202
33 / 85 / 16	
41 / 85 / 16	
Distribution terminal boards	
12 holes Ø 5.3 mm	
10	
1.5-10	
1.5-16	
10-WP100/21	
500 V / 63 A / B5	
-	
6	
2 / 2.5 Nm	
	

APPROVALS

ACCESSORIES	
End section	
End bracket	
Mounting rail	
according to IEC 60715 Std.	

Type	Cat. No.
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT/3-BTO for PR/3 only	BT003-BT007
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005

Type	Cat. No.
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT/3-BTO for PR/3 only	BT003-BT007
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005