




NOTE

The module is equipped with 1N4007 diodes

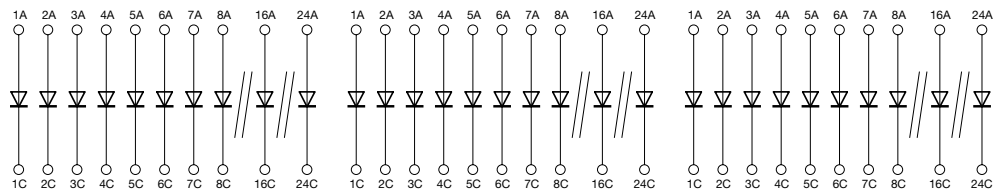

CODE	XCDM08CS		XCDM16CS		XCDM24CS	
TYPE	CDM08CS		CDM16CS		CDM24CS	
GENERAL TECHNICAL DATA						
Number of poles	8		16		24	
Version	feed-through		feed-through		feed-through	
Input rated voltage	0...100 V ±10%		0...100 V ±10%		0...100 V ±10%	
Input rated current	Applicable current 1 A max		Applicable current 1 A max		Applicable current 1 A max	
Operating temperature	-20...+60°C		-20...+60°C		-20...+60°C	
Standards approvals	—		—		—	
Overvoltage category /pollution degree	II / 2		II / 2		II / 2	
Protection degree	IP 00		IP 00		IP 00	
Connection terminal	2.5 mm² screw		2.5 mm² screw		2.5 mm² screw	
Status indication	—		—		—	
Dimensions	25x60x76 mm		50x65x93 mm		71x65x93 mm	
Approximate weight	—		—		—	
Housing material	UL94V-0 plastic material		UL94V-0 plastic material		UL94V-0 plastic material	
Mounting informations	vertical on rails, side by side		vertical on rails, side by side		vertical on rails, side by side	
APPROVALS	CE		CE		CE	
ACCESSORIES						
Mounting rail IEC60715 TH35 75	PR003, PR903, PR005, PR942		PR003, PR903, PR005, PR943		PR003, PR903, PR005, PR944	
Mounting rail IEC60715 TH35 15	PR007, PR907, PR006, PR943		PR007, PR907, PR006, PR944		PR007, PR907, PR006, PR945	
Marking tag	—		—		—	