

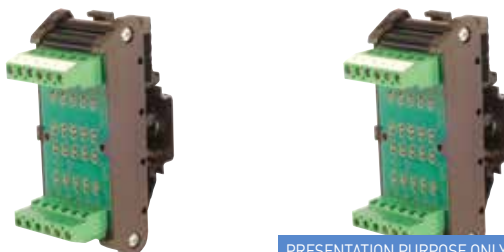


- Suitable for diodes and resistors
- Small size



PRESENTATION PURPOSE ONLY



CODE	XCCM08CV	XCCM16CV
TYPE	CCM08CV	CCM16CV
GENERAL TECHNICAL DATA		
Number of poles	8	16
Version	with common connection	with common connection
Input rated voltage	0...220 V ±10%	0...220 V ±10%
Input rated current	5 A channel / 15 A on common	5 A channel / 15 A on common
Operating temperature	-20...+60°C	-20...+60°C
Standards approvals	—	—
Overvoltage category /pollution degree	II / 2	II / 2
Protection degree	IP 00	IP 00
Connection terminal	2.5 mm ² screw	2.5 mm ² screw
Status indication	—	—
Dimensions	25x55x93 mm	47x66x93 mm
Approximate weight	—	—
Housing material	UL94V-0 plastic material	UL94V-0 plastic material
Mounting informations	vertical on rails, side by side	vertical on rails, side by side
APPROVALS	CE	CE
ACCESSORIES		
Mounting rail IEC60715 TH35 75	PR003, PR903, PR005, PR937	PR003, PR903, PR005, PR938
Mounting rail IEC60715 TH35 15	PR007, PR907, PR006, PR938	PR007, PR907, PR006, PR939
Marking tag	—	—