


|                        |                                                                                                                                                                                                                                                                                      |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>023-7</b>                                                                                                                                                                                                                                                                         |
| article description    | <b>CEE-plug 32A 3p 7h IP44 SHARK</b>                                                                                                                                                                                                                                                 |
| description long       | CEE-plug 32A 3p 7h IP44/IP54 SHARK<br>housing material: PA6<br>rated current: 32A<br>number of poles: 3 (2P+PE)<br>clock-position: 7h<br>rated voltage/frequency: 480-500V~ / 50+60Hz<br>contacts: brass<br>connection technology: screw terminals<br>IP protection class: IP44/IP54 |
| GTIN (EAN)             | 9003399139222                                                                                                                                                                                                                                                                        |
| country of origin      | AT                                                                                                                                                                                                                                                                                   |
| customs number         | 85366990                                                                                                                                                                                                                                                                             |
| net weight             | 0.178 kg                                                                                                                                                                                                                                                                             |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                   |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                   |

|                                 |                        |
|---------------------------------|------------------------|
| ETIM 9.0                        | EC000140               |
| IEC-amperage                    | 32 A                   |
| Number of poles                 | 3                      |
| Voltage according to EN 60309-2 | 500 V (50+60 Hz) black |
| Clock hour position             | 7 h                    |
| Identification colour           | Black                  |
| Degree of protection (IP)       | IP44                   |
| Connection system               | Screwed terminal       |
| Cable entry                     | Gland nut              |
| Angle of plug                   | Straight               |
| Material                        | Plastic                |
| Contact material                | CuZn                   |
| Surface treatment contacts      | Untreated              |

|                        |                       |
|------------------------|-----------------------|
| a                      | 150 mm                |
| b                      | 104 mm                |
| c                      | 63 mm                 |
| K (cable Ø)            | 11,5-20 mm            |
| SW                     | 50 mm                 |
| wire flexible          | 2,5-6 mm <sup>2</sup> |
| contact screws         | 110 Ncm               |
| strain relief          | 600 Ncm               |
| dismantling length     | 50 mm                 |
| stripping length       | 12-14 mm              |
| ambient temperature    | -25 – 40 °C           |
| temperature resistance | -25 – 80 °C           |

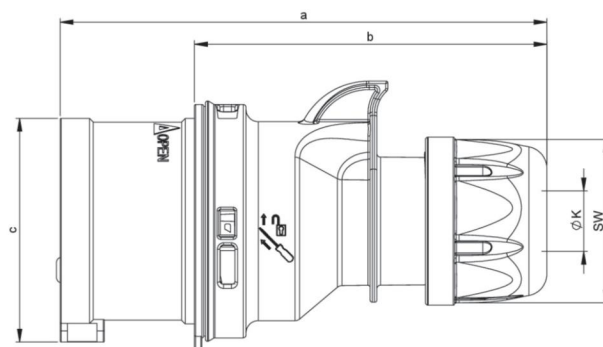

<https://www.pcelectric.at/shop/en/?func=detail&artnr=023-7>