


|                        |                                                                                                                                                                                                                                                                                                               |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>525-6v</b>                                                                                                                                                                                                                                                                                                 |
| article description    | <b>CEE-wall mounted plug 32A 5p 6h IP44</b>                                                                                                                                                                                                                                                                   |
| description long       | CEE-wall mounted plug 32A 5p 6h IP44<br>housing material: PA6<br>rated current: 32A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 6h<br>rated voltage/frequency: 200/346V~ - 240/415V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>IP protection class: IP44 |
| GTIN (EAN)             | 9003399061134                                                                                                                                                                                                                                                                                                 |
| country of origin      | AT                                                                                                                                                                                                                                                                                                            |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                      |
| net weight             | 0.253 kg                                                                                                                                                                                                                                                                                                      |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                            |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                            |

|                                 |                             |
|---------------------------------|-----------------------------|
| ETIM 9.0                        | EC001319                    |
| IEC-amperage                    | 32 A                        |
| Voltage according to EN 60309-2 | 400 V (50+60 Hz) red        |
| Number of poles                 | 5                           |
| Clock hour position             | 6 h                         |
| Identification colour           | Red                         |
| Degree of protection (IP)       | IP44                        |
| Connection system               | Screwed terminal            |
| Construction type               | Surface mounted device plug |
| Phase inverter                  | False                       |
| Angle of plug                   | Angled                      |
| Material                        | Plastic                     |
| Contact material                | CuZn                        |
| Surface treatment contacts      | Nickel-plated               |

|                        |                        |
|------------------------|------------------------|
| a                      | 132 mm                 |
| b                      | 85 mm                  |
| wire flexible          | 2,5-6 mm <sup>2</sup>  |
| wire solid             | 2,5-10 mm <sup>2</sup> |
| contact screws         | 110 Ncm                |
| housing screws         | 110 Ncm                |
| connecting screws      | 110 Ncm                |
| dismantling length     | 50 mm                  |
| stripping length       | 12-14 mm               |
| ambient temperature    | -25 – 40 °C            |
| temperature resistance | -25 – 80 °C            |

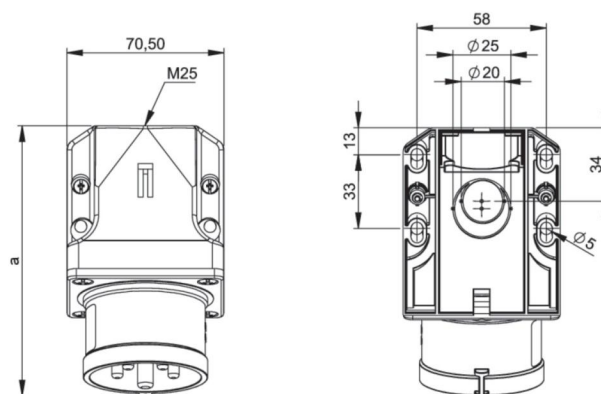

b=Höhe/height  
Neigung/angle=15°



<https://www.pcelectric.at/shop/en/?func=detail&artnr=525-6v>