


|                        |                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>314-6tt</b>                                                                                                                                                                                                                                                                                                                                                          |
| article description    | <b>CEE-flanged socket straight (70x70mm) 16A 4p 6h IP44 TT</b>                                                                                                                                                                                                                                                                                                          |
| description long       | CEE-flanged socket straight (70x70mm) 16A 4p 6h IP44 TT<br>housing material: PA6<br>rated current: 16A<br>number of poles: 4 (3P+PE)<br>clock-position: 6h<br>rated voltage/frequency: 380-415V~ / 50+60Hz<br>contacts: brass<br>connection technology: screwless terminals (TT)<br>dimensions (flange/fixing center): 70x70 mm / 56x56 mm<br>IP protection class: IP44 |
| GTIN (EAN)             | 9003399581311                                                                                                                                                                                                                                                                                                                                                           |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                                                      |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                                                                |
| net weight             | 0.128 kg                                                                                                                                                                                                                                                                                                                                                                |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                                                                                      |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                                                                                      |

|                                 |                      |
|---------------------------------|----------------------|
| ETIM 9.0                        | EC001317             |
| IEC-amperage                    | 16 A                 |
| Voltage according to EN 60309-2 | 400 V (50+60 Hz) red |
| Number of poles                 | 4                    |
| Clock hour position             | 6 h                  |
| Identification colour           | Red                  |
| Degree of protection (IP)       | IP44                 |
| Connection system               | Screw less terminal  |
| Angle of plug                   | Straight             |
| Material                        | Plastic              |
| Contact material                | CuZn                 |
| Surface treatment contacts      | Untreated            |
| Flange size vertical            | 70 mm                |
| Drill hole distance vertical    | 56 mm                |
| Flange size horizontal          | 70 mm                |
| Drill hole distance horizontal  | 56 mm                |

|                        |             |
|------------------------|-------------|
| a                      | 70 mm       |
| b                      | 70 mm       |
| c                      | 56 mm       |
| d                      | 56 mm       |
| e                      | 27 mm       |
| f                      | 55 mm       |
| g                      | 5,5 mm      |
| h                      | 45 mm       |
| i                      | 101 mm      |
| j                      | 101 mm      |
| wire flexible          | 1-2,5 mm²   |
| wire solid             | 1-4 mm²     |
| dismantling length     | 50 mm       |
| stripping length       | 10-12 mm    |
| ambient temperature    | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |

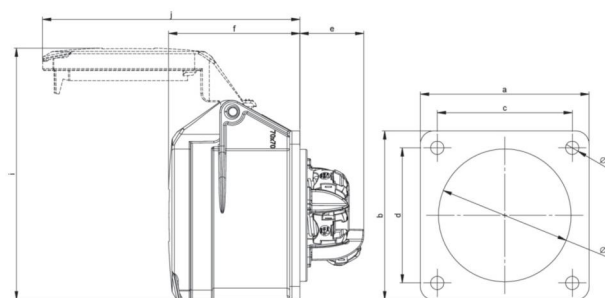

<https://www.pcelectric.at/shop/en/?func=detail&artnr=314-6tt>